


**MLFPPK**  
**FLAT PANEL FLANGE MOUNTING KIT**

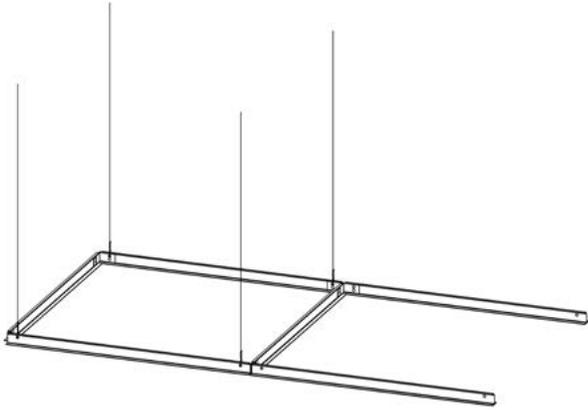

**PRODUCT DESCRIPTION:**

The Flat Panel Flange Mounting Kit is designed for recessed installation in drywall ceiling applications.

**APPLICATIONS:**

- Designed to permit use of grid (NEMA G) fixtures in ceilings requiring flanges
- Designed to be used with any grid (NEMA G) troffer
- Suitable for individual and continuous row applications

**CONSTRUCTION/FINISH:**

- Side and end rails are extruded with powder coat finish
- Corner clips are zinc-plated steel and slide into slots provided in side and end rails


**FITS:**

- FlatMax™ LED Flat Panels: 1'x4', 2'x2' and 2'x4'
- ArcMax SB Series 1'x4', 2'x2' and 2'x4'
- ECO-T Recessed Troffers: 2'x2', 2'x4'

**ORDERING:**

ORDER CODE	MODEL NUMBER	DESCRIPTION	DIMENSIONS
99968	MLFPPK1X4-215	LED FLAT PANEL FLANGE KIT FOR 1X4 VERSION 2	See Dimensions Chart
99969	MLFPPK2X2-215	LED FLAT PANEL FLANGE KIT FOR 2X2 VERSION 2	See Dimensions Chart
99970	MLFPPK2X4-215	LED FLAT PANEL FLANGE KIT FOR 2X4 VERSION 2	See Dimensions Chart


**DIMENSIONS:**

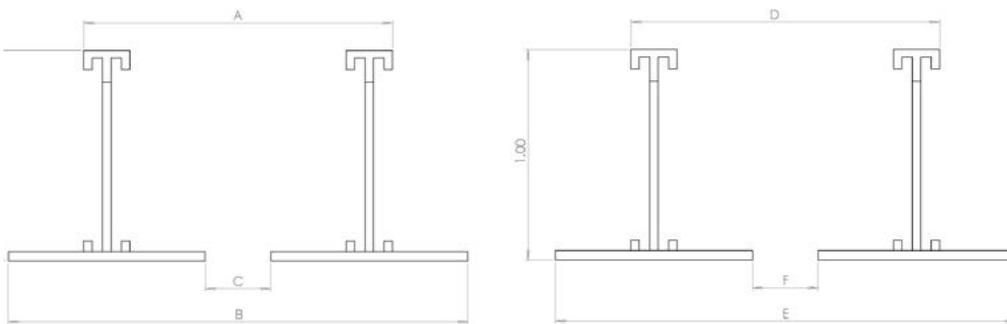

UNIT SIZE	WIDTH			LENGTH		
	A	B	C	D	E	F
1X4	12 ¾"	13 ½"	11 ¼"	48 5/8"	49 ¼"	47 ¼"
2x2	24 9/16"	25 5/16"	23 ½"	24 9/16"	25 5/16"	23 ½"
2X4	24 9/16"	25 5/16"	23 ½"	48 5/8"	49 ¼"	47 1/4"

**INSTALLATION:**

- Slide (snap-lock) the corner angles into side and end/intermediate rails as shown above.
- Place the assembled frame into the ceiling opening and wire support (at four corners as shown) from main floor/ceiling structure.
- For continuous row installation, order the appropriate number of MLFPFK kits. No extension kits are required.
- The ceiling opening required is nominal width and length plus 1/4". Example: 24-1/4" x 48-1/4" for an MLFPFK2x4
- The continuous row opening required is the sum of the nominal sizes plus 1/4". Example: a row of
- 2'x12' (three MLFP24's) requires a ceiling opening of 24-1/4" x 144-1/4" (2'-1/4" x 12'-1/4").

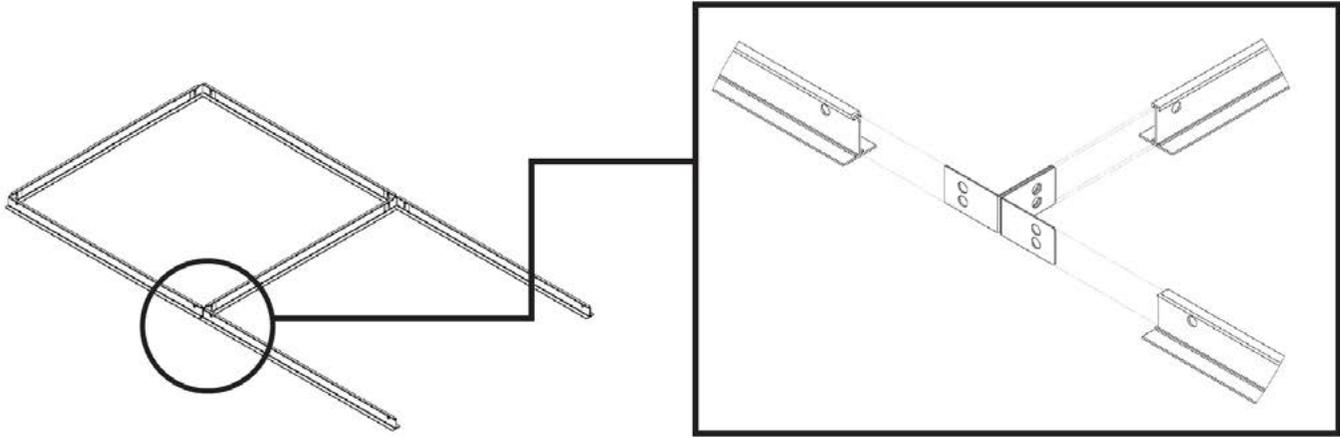

**WIRE SUPPORT:**

