

Enhancement Suite™

5 DIAMOND COLLECTION 

The lighting that brings out the best in your property



The Designer's choice:
Developed especially for the discriminating leaders in hospitality and their premier properties; creating a warm, and sophisticated atmosphere for guests, and complementing and enhancing today's furnishings palette of refined earth-tones.



Spirals



Candles



R's



Globes



MiniBulbs



'THE ENHANCEMENT SUITE™' – ENHANCES DESIGNER FURNISHINGS

The 'Enhancement Suite™' Collection from MaxLite™; the light and the features that today's discerning designers demand for their customers; Instant-on, color that enhances décor, high lumen maintenance, long life, a variety of styles matched and sized for any fixture, all with performance standards to meet the highest demands of hospitalities most discriminating guests.



Enhancement Suite™

5 DIAMOND COLLECTION 

The lighting that brings out the best in your property



Look for this logo on ISIB Products and on MaxLite.com for more information.



MLS7ES
10,000 Hour

(7) 6762711353 (6)*



MLS13ES
10,000 Hour

(7) 6762711354 (3)*



MLS20ES
10,000 Hour

(7) 6762711355 (0)*



MLS25ES
10,000 Hour

(7) 6762711356 (7)*



MLS30ES
10,000 Hour

(7) 6762711357 (4)*

ENHANCEMENT SUITE SPIRAL SPECIFICATIONS

Watts	Order Code	Description	Incandescent Equivalent	Lumens	Lamp* Life (Hrs)	Pack Type	Case Pack	K	Dimensions (W" x MOL")
7	11353	MLS7ES Spiral	30	400	10,000	Box	48	2500	1.7 x 4.0
13	11354	MLS13ES Spiral	60	900	10,000	Box	48	2500	1.89 x 4.19
20	11355	MLS20ES Spiral	75	1300	10,000	Box	48	2500	2.4 x 4.9
25	11356	MLS25ES Spiral	100	1750	10,000	Box	48	2500	2.3 x 5.0
30	11357	MLS30ES Spiral	120	1950	10,000	Box	48	2500	2.4 x 5.6

SPECIAL NOTES

- >> Do not use on circuits with dimmers, timers or other control devices
- >> Not for use in totally enclosed fixtures

APPLICATIONS

- Table Lamps and Floor Lamps
- Chandeliers
- Corridor Light & Wall Sconce

LOCATIONS

- Specially designed for hospitality applications.

BENEFITS

- Consistent, pure, clean, warm color
- All wattages and types of lamp color matched
- Low Mercury (Hg)
- Ultra mini size fits all fixtures
- Long life – lasts up to 10,000 hours
- Saves Energy – up to 75% savings
- Instant-on, flicker-free electronics

SPECIFICATIONS

- Ballast Type >> Electronic
- Starting Method >> Instant Start
- Input Line Voltage >> 120VAC
- Input Line Frequency >> 50/60HZ
- Mini. Starting Temp. >> 0°F
- Max. Operating Temp. >> 100°F
- Color Rendering Index >> 84
- ISIB >> Instant Start Instant Bright

MAX10500-10

All specifications subject to change without notice.
* Based on 3 hour average burn cycle per day



FCC Certified
UPC Codes

MaxLite™: 1-800-555-5629

Fax: 973-244-7300

info@maxlite.com

www.maxlite.com

MaxLite West™: 1-800-793-1212

Fax: 909-944-1442

info@maxlite.com

www.maxlite.com


Enhancement Suite™

5 DIAMOND COLLECTION 

The lighting that brings out the best in your property



Look for this logo on ISRB Products and on MaxLite.com for more information.

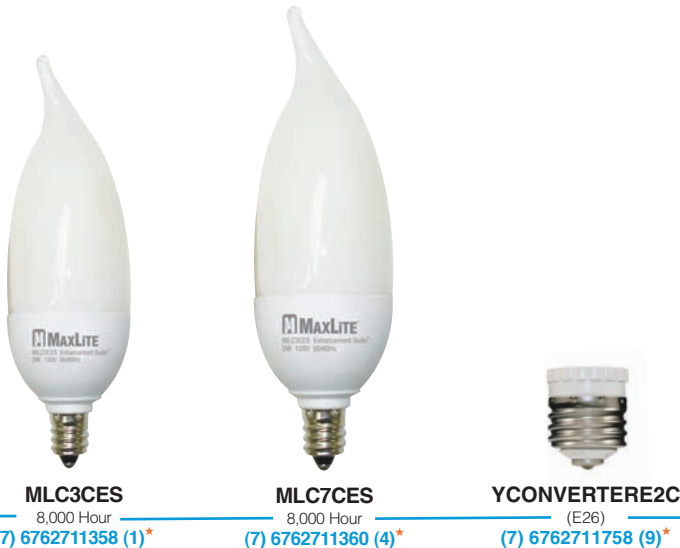

ENHANCEMENT SUITE CANDLE SPECIFICATIONS

Watts	Order Code	Description	Incandescent Equivalent	Lumens	Lamp* Life(Hrs)	Pack Type	Case Pack	Dimensions (W"xMOL")	K
3	11358	MLC3CES Candle E12 Base	20	135	8,000	Box	48	1.5" x 4.4"	2500
7	11360	MLC7CES Candle E12 Base	30	315	8,000	Box	48	1.5" x 4.9"	2500
	70455	YCONVERTERE2C E12 to E26 Base Adapter				Bulk	25	.8" x 1.13"	

SPECIAL NOTES

- >> Do not use on circuits with dimmers, timers or other control devices
- >> Not for use in totally enclosed fixtures

APPLICATIONS

- Table & Floor Lamps
- Recessed Light
- Corridor Light & Wall Sconce

LOCATIONS

- Specially designed for hospitality applications.

BENEFITS

- Ultra mini size fits all fixtures
- Long life – lasts up to 8,000 hours
- Saves Energy – up to 75% savings
- Instant-on, flicker-free electronics

SPECIFICATIONS

- Ballast Type >> Electronic
- Starting Method >> Instant Start
- Input Line Voltage >> 120VAC
- Input Line Frequency >> 50/60HZ
- Mini. Starting Temp. >> 0°F
- Max. Operating Temp. >> 100°F
- Color Rendering Index >> 84

MAX10500-10

All specifications subject to change without notice.

* Based on 3 hour average burn cycle per day



FCC Certified

* UPC Codes

MaxLite™: 1-800-555-5629

Fax: 973-244-7300

info@maxlite.com

www.maxlite.com

MaxLite West™: 1-800-793-1212

Fax: 909-944-1442

info@maxlite.com

www.maxlite.com

Enhancement Suite™

5 DIAMOND COLLECTION 

The lighting that brings out the best in your property



Look for this logo on ISB Products and on MaxLite.com for more information.



MLR207ES
8,000 Hour
(7) 6762711362 (8)*



MLR209ES
8,000 Hour
(7) 6762711363 (5)*



MLR211ES
8,000 Hour
(7) 6762711364 (2)*



MLR315ES
8,000 Hour
(7) 6762711366 (6)*

ENHANCEMENT SUITE R'S SPECIFICATIONS

Watts	Order Code	Description	Incandescent Equivalent	Lumens	Lamp* Life(Hrs)	Pack Type	Case Pack	Dimensions (W" x MOL")	K
7	11362	MLR207ES R20	30	245	8,000	Box	48	2.5 x 5.0	2500
9	11363	MLR209ES R20	40	405	8,000	Box	48	2.5 x 5.0	2500
11	11364	MLR211ES R20	60	400	8,000	Box	48	2.5 x 5.0	2500
15	11366	MLR315ES R20	75	690	8,000	Box	48	3.7 x 5.4	2500

SPECIAL NOTES

- >> Do not use on circuits with dimmers, timers or other control devices
- >> Not for use in totally enclosed fixtures

APPLICATIONS

- Table & Floor Lamps
- Recessed Light
- Corridor Light & Wall Sconce

LOCATIONS

- Specially designed for hospitality applications.

BENEFITS

- Ultra mini size fits all fixtures
- Long life – lasts up to 8,000 hours
- Saves Energy – up to 75% savings
- Instant-on, flicker-free electronics

SPECIFICATIONS

- Ballast Type >> Electronic
- Starting Method >> Instant Start
- Input Line Voltage >> 120VAC
- Input Line Frequency >> 50/60HZ
- Mini. Starting Temp. >> 0°F
- Max. Operating Temp. >> 100°F
- Color Rendering Index >> 84

MAX10500-10

All specifications subject to change without notice.
* Based on 3 hour average burn cycle per day



FCC Certified
* UPC Codes

MaxLite™: 1-800-555-5629

Fax: 973-244-7300

info@maxlite.com

www.maxlite.com

MaxLite West™: 1-800-793-1212

Fax: 909-944-1442

info@maxlite.com

www.maxlite.com

Enhancement Suite™

5 DIAMOND COLLECTION 

The lighting that brings out the best in your property



Look for this logo on ISRB Products and on MaxLite.com for more information.



MLB8ES

10,000 Hour

(7) 6762711376 (5)*



MLB13ES

10,000 Hour

(7) 6762711377 (2)*



MLB20ES

10,000 Hour

(7) 6762711699 (5)*



MLG14ES

10,000 Hour

(7) 6762711379 (6)*

ENHANCEMENT SUITE MINIGLOBE & MINIBULBSPECIFICATIONS

Watts	Order Code	Description	Incandescent Equivalent	Lumens	Lamp* Life(Hrs)	Pack Type	Case Pack	Dimensions (W" x MOL")	K
8	11376	MLB8ES A-17 Coin Ballast	30	315	8,000	Box	48	2.4 x 4.3	2500
13	70389	MLB13ES A-19	60	715	8,000	Box	48	2.4 x 4.85	2500
20	70390	MLB20ES A-21	75	1100	8,000	Box	48	2.6 x 5.8	2500
14	11379	MLG14ES G30	60	770	8,000	Box	24	3.5 x 5.2	2500

SPECIAL NOTES

- >> Do not use on circuits with dimmers, timers or other control devices
- >> Not for use in totally enclosed fixtures

APPLICATIONS

- Table & Floor Lamps
- Recessed Light
- Corridor Light & Wall Sconce

LOCATIONS

- Specially designed for hospitality applications.

BENEFITS

- Ultra mini size fits all fixtures
- Long life – lasts up to 8,000 hours
- Saves Energy – up to 75% savings
- Instant-on, flicker-free electronics

SPECIFICATIONS

- Ballast Type >> Electronic
- Starting Method >> Instant Start
- Input Line Voltage >> 120VAC
- Input Line Frequency >> 50/60HZ
- Mini. Starting Temp. >> 0°F
- Max. Operating Temp. >> 100°F
- Color Rendering Index >> 84

MAX10500-10

All specifications subject to change without notice.

* Based on 3 hour average burn cycle per day



FCC Certified
UPC Codes

MaxLite™: 1-800-555-5629

Fax: 973-244-7300

info@maxlite.com

www.maxlite.com

MaxLite West™: 1-800-793-1212

Fax: 909-944-1442

info@maxlite.com

www.maxlite.com