


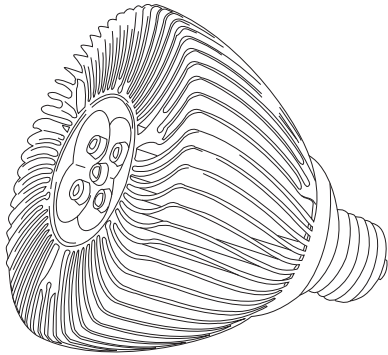


## LED Screw-in Pars & MR16

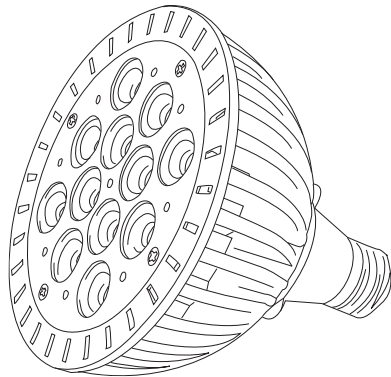

For more information on MaxLite products, visit:  
[www.MaxLite.com](http://www.MaxLite.com). Click on "PRODUCT LINE"

### FOR ORDERING:

Tel: 1-800-555-5629

Fax: 973-244-7333

E-mail: [info@maxlite.com](mailto:info@maxlite.com)

**MaxLite**  
80 Little Falls Road  
Fairfield, NJ  
07004


### PRODUCT FEATURES:

- 50,000 Hour life – based on 30% lumen depreciation
- Two Colors: 3000K and 5000K
- Solid aluminum housing for thermo heat protection
- 120V – CRI 80
- MR16- 12V AC/DC
- CREE LEDs
- Photo metrics and IES files available at [www.maxlite.com](http://www.maxlite.com) (go to Product Line)





# LED Screw-in Pars & MR16

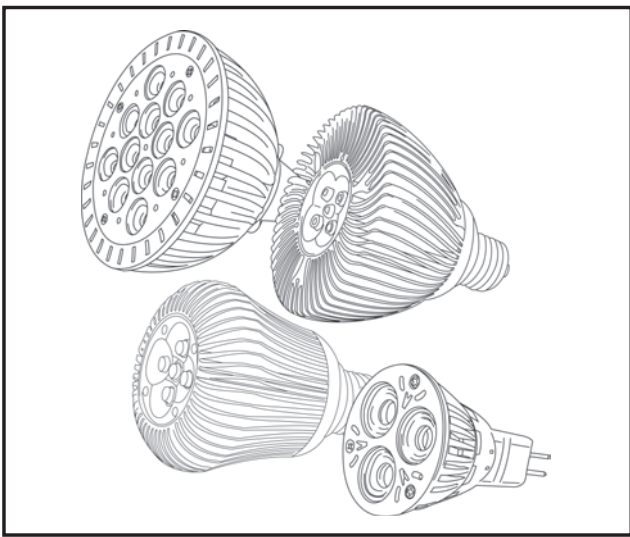

**LEDs:** Industry leading CREE LEDs for long lasting performance. All LEDs are matched for color and CRI. The stated 50,000 Hour life is based on functional light quality. After 30% lumen depreciation MaxLite considers the functionality of the lamp to be ended. That is end-of-life. Even though the lamp is still at 70% of initial lumens.

**Housing:** The body of each lamp is solid aluminum. The aluminum acts as a heat-sink providing thermo heat conductivity. This keeps the LED junction temperature well below the manufacturer's specification. The lamps stay cool and the lumens are maintained for longer life. The bodies are molded into fin shapes to increase the surface area of the aluminum. The larger the surface area the more effective is the cooling.

## PRODUCT FEATURES:

- 50,000 Hour Life
- Two Colors: 3000K and 5000K
- Solid Aluminum housing for thermo heat protection
- 120V – CRI 80
- MR16- 12V AC/DC
- CREE LEDs
- Photo metrics and IES Files available at [www.maxlite.com](http://www.maxlite.com) (go to Product Line).

**Bases:** All the PAR lamp bases are standard medium E26 Edison screw in bases. The MR16 has a standard GU 5.3 Base.

## LED SCREW-IN PARs SPECIFICATIONS





\* Photometrics & IES files available at [www.maxlite.com](http://www.maxlite.com)

Watts	Order Code	Model Number	Incandescent Equivalent	Lumens	Beam Angle	Lamp Life (Hrs)	Pack Type	Case Pack	Dimensions (W"xMOL)	K
12	70366	SKR3812WWLED	75	600	30°	50,000	Box	12	4.8 x 4.9	3000
12	70367	SKR3812DLLED	75	720	30°	50,000	Box	12	4.8 x 4.9	5000
10	70368	SKR3010WWLED	60	500	30°	50,000	Box	12	3.7 x 4.3	3000
10	70369	SKR3010DLLED	60	550	30°	50,000	Box	12	3.7 x 4.3	5000
5	70370	SKR2005WWLED	45	300	30°	50,000	Box	12	2.9 x 4.05	3000
5	70371	SKR2005DLLED	45	350	30°	50,000	Box	12	2.9 x 4.05	5000

## LED MR16 SPECIFICATIONS

\* MR16- 12V AC/DC

Watts	Order Code	Model Number	MR16 Equivalent	Lumens	Beam Angle	Lamp Life (Hrs)	Pack Type	Case Pack	Dimensions (W"xMOL)	K
4	70374	SKMR1604WWLED	30	175	38°	50,000	Box	24	2.1 x 2.0	3000
4	70375	SKMR1604DLLED	30	200	38°	50,000	Box	24	2.1 x 2.0	5000



MAX9079

