




LIGHTFAIR 2016 PREVIEW

March 31, 2016

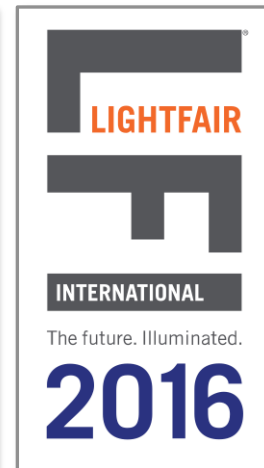

TODAY'S AGENDA

- Introduction
- Indoor
- Outdoor
- Lamps
- Q&A



MaxLite Webinars
A NEW WAVE OF LIGHT

MaxLite Presents:

LIGHTFAIR 2016 Preview Webinar

3/31/16 at 12pm



LIGHTFAIR
INTERNATIONAL
The future. Illuminated.
2016

- MaxLite will showcase its latest indoor and outdoor LED innovations at LIGHTFAIR 2016.
- Join us on Thursday, March 31st at 12pm EST for a sneak preview of what's in store!

Click Here To Register Now!



Add this webinar to your calendar
(If prompted to OPEN or SAVE, choose OPEN)



Get a FREE VIP Pass to LIGHTFAIR 2016!

If you are having trouble viewing this click [here](#) for an online version.

Get a FREE VIP Pass to
LIGHTFAIR 2016
courtesy of **MaxLite**

**CLICK HERE TO
REGISTER TODAY**

Join us for a
VIP Cocktail Party
at our **Booth #1737**
Tuesday, April 26th
from 4 - 6pm




APRIL
26TH - 28TH
LIGHTFAIR
INTERNATIONAL
The future. Illuminated.
2016
San Diego, CA
San Diego
Convention Center

MaxLite: 1-800-555-5629 | www.maxlite.com | info@maxlite.com

Find us on:

MaxLite's New Booth for LIGHTFAIR 2016!



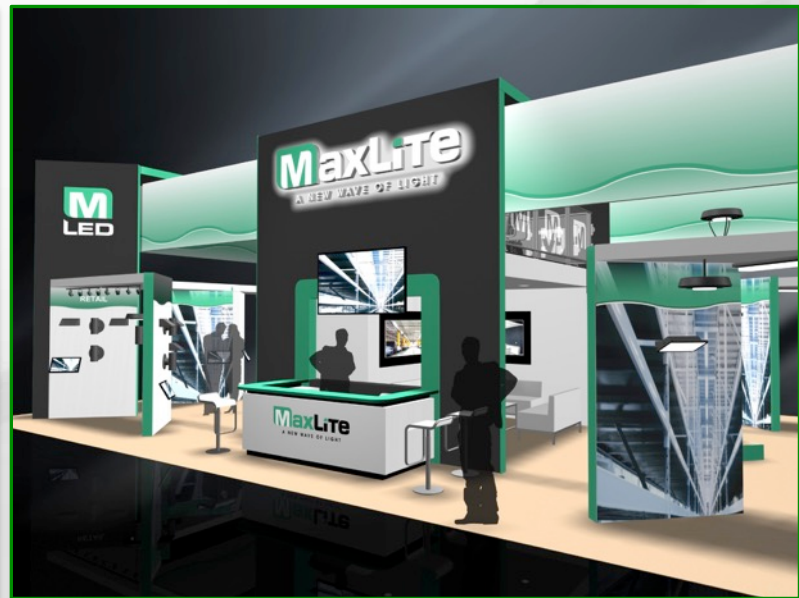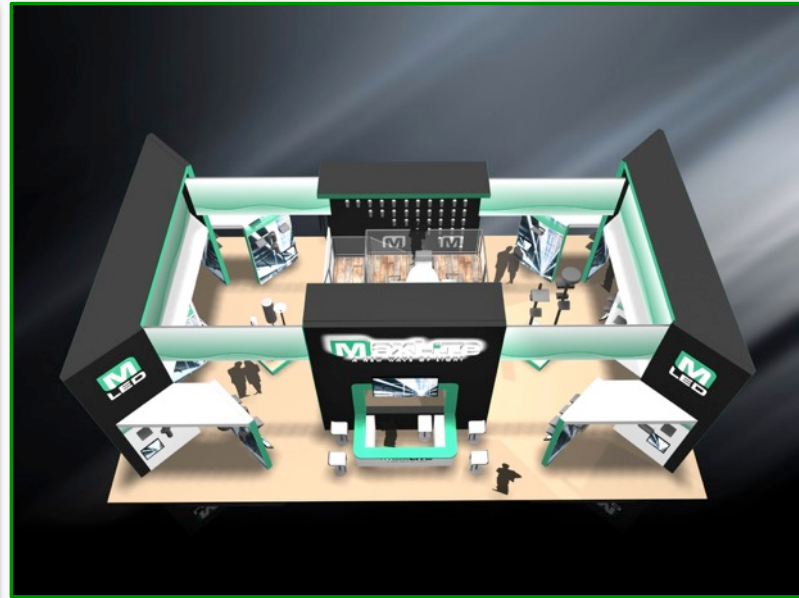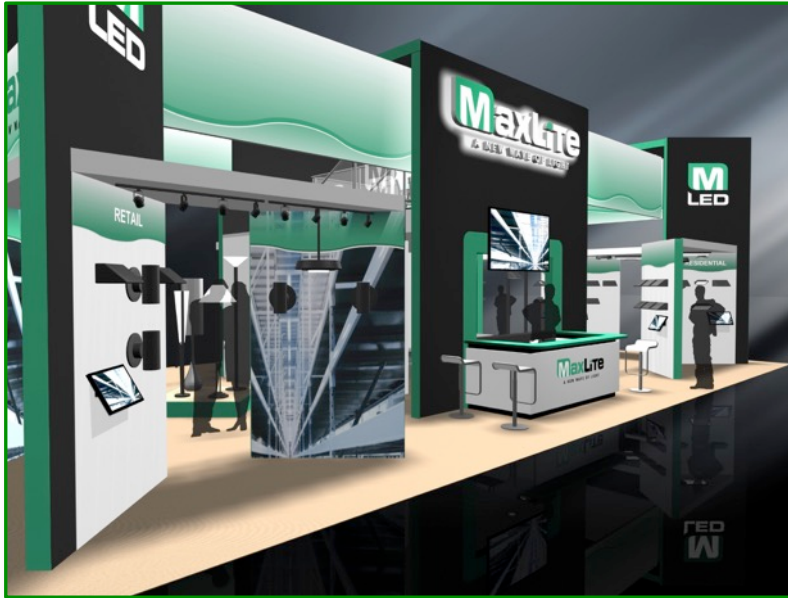

INDOOR

Highbays Island

- 14a Round Pendant Wide -
- 14b 1x2 Linear Gen3
- 14c ModMax
- 14d New Acrylic Highbay

CONTROLS 13 Just Graphic

Recessed Panels

- 11 2x4 ArcMax SB/Graphic/Monitor
- 12a 2x2 Edge Lit - Color Tuned
- 12b 2x4 Edge Lit
- 32 (4) 2x2 Edge Lit

Downlights

- 10a 6" Adjustable Warm-on Dim
- 10b 4" 120-277 Residential Downlights
- 10c 6" Faux Can
- 10d 8" Economical Downlights
- 10e 9" Architectural Downlights- DLR
- 33 (14) 6" Residential downlights

Retrofit Kits

- 9a 2x2 LRK retrofits
- 9d 2x4 Retro fit Kit Strip
- 9b 4" Strip Retrofit Kit
- 9c 4" Strip Retrofit Lamp Ready

Accent Lighting

- 8 Track Lighting Tracks
- 8 Track Lighting Heads
- 7a Lightbars, 12" 24" 36" 48" Plug N Play
- 7b Lightbars 12" 24" 48" Low Voltage

Linear Lumineers

- 6a 4' Tri-Proof Vapor Tight
- 6a 4' Polygon Gen 2
- 6a 4' Shop Light
- 6a 4' Industrial Strip Light
- 6b 8' Vapor Tight (Not Guranteed.)

Lamp Ready

- 5 4' Utility Wrap
- 5 48"x15" 6-Lamp High Bay
- 5 2x4 Troffer


Multi-Residential

- 4 (3) Downlight Mini Pendant Graphic/Monitor
- 2 Large Wall Sconce
- 2 Vanity Bar
- 3 Downlight Pendant
- 2 Ranch Lantern
- 3 Semi Flush mount
- 2 Coach Lantern
- 3 Ala Flush mount
- 2 Medium Lantern
- 32 Up & Down Pend
- 2 Small Lantern

SPECIALITY LAMPS

- 1 15w DirectFit T8
- 1 12.5w Bypass T8
- 1 27w DirectFit T5
- 1 Refrigerator Linear Tube
- 1 U-Bend
- 1 PL Bypass
- 1 PL DirectFit
- 1 PLL

2016 LFI BOOTH FLOOR PLAN

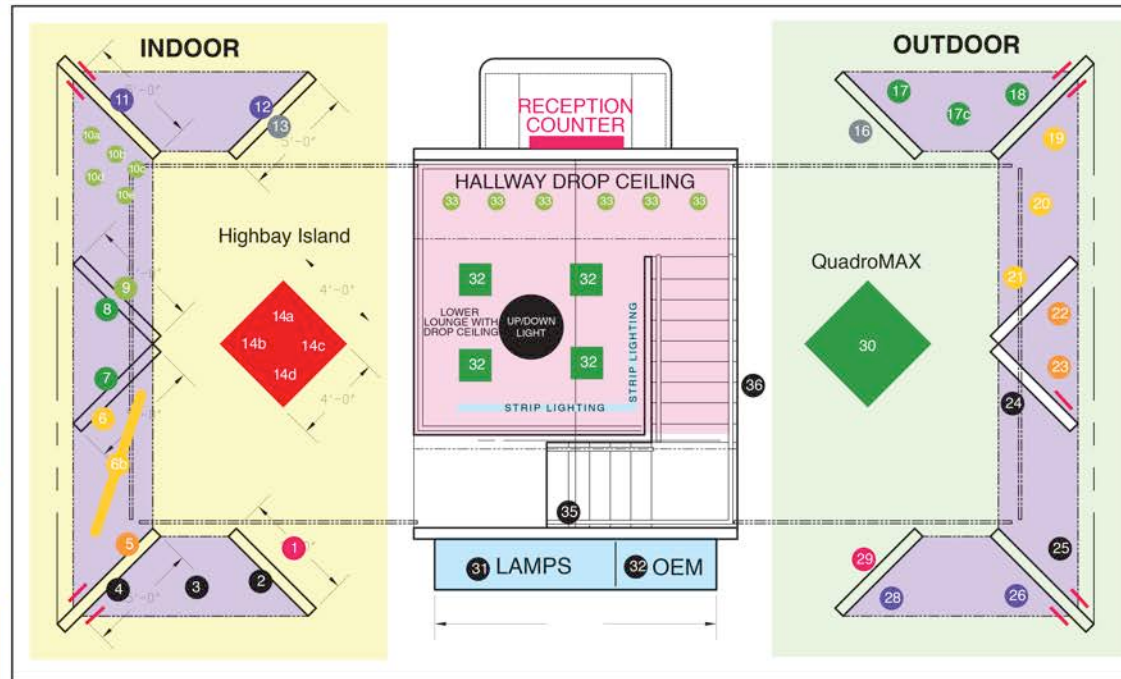

OUTDOOR

Hazardous Location/Graphic

- 16 Haz Loc StaxMax
- 16 HLR Series

QuadroMAX/DiscMAX Pole

- 30 Flood
- 30 Pole Mount
- 30 1000 W equ 250W area light
- 30 DiscMAX Post Top

QuadroMAX Walls

- 18 Slipfitter Fixed - Graphic/Monitor
- 17c Quadro MAX Canopy
- 17 Trunnion, Knuckle Surface, Surface fixed, Wall pack

Garage and Canopy

- 19 PKG Housing Retrofit (3) /Graphic/Monitor
- 20 Recessed Canopy
- 20 DiscMAX Canopy
- 20 Slim Canopy
- 20 Small Square Canopy
- 21 Vapor tight Garage Canopy
- 21 Polygon Garage Canopy

Flood Lights

- 22 Large Architectural
- 22 Small Flood Narrow
- 22 Bullet Large
- 22 Architectural Small
- 22 Stax Max Single
- 23 Graphic/Monitor

Area and Roadway

- 24 Shoebox Retro
- 24 50W BARN
- 25 Slim/Arch Area - Graphic/Monitor

Wall Packs

- 26 90W Diamond with Motion Sensor
- 28 Adjustable Wall pack Lrg/Graphic Monitor
- 28 400W Equivalent WP
- 28 40W Retrofit Kit

Vapor Proof

- 29 Vapor
- 29 Jelly jar with Wire Guard
- 29 Jelly jar without wire guard

Security lights

- 29 White slim sec
- 29 Architectural Security

Graphic Monitors

Wall Graphic
36

LAMPS 31

- Filament Candle
- Filament A19
- Filament T14
- Filament G30
- Filament ST18
- Silver Bowl A19

- A-lamp 40w replacement
- A-lamp 60w replacement
- A-lamp 75w replacement
- A-lamp 100w replacement
- Reflector R20
- Reflector BR30
- Reflector BR40
- PAR20
- PAR30LN
- PAR38
- Decorative Candle

- Decorative G25
- Decorative G40
- Miniature G4
- Miniature Wedge
- Miniature G9
- Enclosed Jelly Jar Fixture
- Leviton Utility Fixture (PUCK)
- Acorn Fixture
- Socket Source Fixture

OEM LIGHT ENGINES and MODULES 32

- LEL5.5A0530C
- LEL5.5IB
- LEL11.5A0830C
- LEL11.5IB
- LEL23A1630C
- LEL23IB
- LER2.2A0830C
- LER2.2IB
- LER2.2A1230C
- LER2.2IB
- LER5.5A1730C
- LER5.5IB
- LER7.0A2330C
- LER7.0IB
- LESKT0830C

The MaxLite logo is centered on a green background with wavy lines. The 'M' is white with a green square behind it. The rest of the text 'axLite' is white. A registered trademark symbol is at the end.

MaxLite[®]

A NEW WAVE OF LIGHT

INDOOR PRODUCTS

Indoor Products - Classification

Troffers



Flat Panels



Volumetric Panels



Retrofit Kits



Direct Indirect

Downlights



Residential Retrofit/Fixtures



Commercial Retrofit/Fixtures



High Bays



Linear High Bays



Round High Bays/ Prismatic



Linears



Wraps



Vapor Tights



Retrofit Kits

Others



Light Bars



Track Lights



Lamp Ready

Flat Panels

Edge Lit



ArcMax



Lens Retrofit Kit



Direct/Indirect Panel



Downlights Overview

RESIDENTIAL



LED Recessed Downlight
Retrofits



LED Recessed Downlight
Fixtures



LED Faux Cans



LED Architectural Downlight
Fixtures

COMMERCIAL



LED Commercial Recessed
Downlight Retrofits



LED Commercial Recessed
Downlight Fixtures



ECO Series-Commercial
Recessed Retrofit Downlight



Architectural Recessed
Downlight Retrofits

NEW

NEW

Downlights

120V-277V Downlight



Warm-on-Dim



Architectural Retrofit (DLR)



Economic Retrofit



High Bays

Round



Acrylic



Linear



Linears

Tri-Proof




Shop Light



Office Light




Retrofit Strip

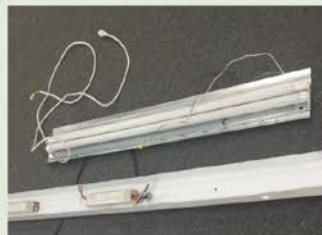

Others

Track Lighting

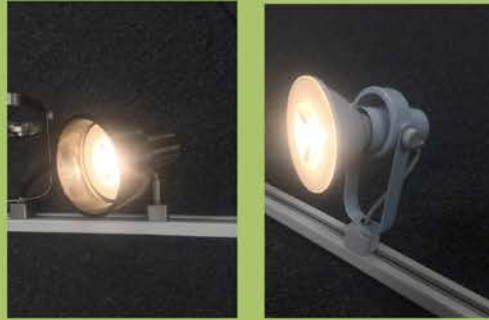

Lamp Ready



Low Voltage Light Bar



The logo features the word "MaxLite" in a bold, sans-serif font. The "M" is white with a green square background, and the "i" has a green dot. A registered trademark symbol (®) is located at the top right of the "e". The background consists of several overlapping, wavy lines in various shades of green, creating a sense of movement and depth.

MaxLite®

A NEW WAVE OF LIGHT

OUTDOOR PRODUCTS

1000W Equivalent Area Light (ARX)

- Ideal solution for retrofit or new construction applications
- Leading efficacy, photometric performance
- Lightweight, EPA-minimal design
- Interchangeable optics (Type V, Type III) and drivers (120-277V, 347-480V)



SKU	Quantity	ETA
ARX25UT550B0A0	100	5/24/16
ARX25UT550B0K0	100	5/24/16
ARX25UT550W0A0	60	5/24/16

Mount	Model	Equivalency	Nominal Wattage	Lumens	Efficacy
2-3/8" Knuckle	ARX25UT550B0K0	1000W MH	250	28,785	114
Arm	ARX25UT550B0A0	1000W MH	250	28,785	114

400W Equivalent Wall Pack (WPL80)

- Ideal retrofit solution for 400W HID wall packs
- Leads market in lumens and efficacy
- Small depth profile, but large enough to cover traditional footprint
- Wide 0.5fc coverage area of 60' x 45' at 30 feet mounting height



SKU	Quantity	ETA
WPL80AU50B	400	IN STOCK

Model	Equivalency	Wattage	Lumens	Efficacy
WPL80AU50B	400W HID	77	8890	116

Canopy / Canopy Retrofit

- Canopy (CP): New generation to replace the CAN and PKG series. Offers a full solution including the housing.
- Retrofit Canopy (CPR): Offers a retrofit solution (housing excluded) – NEW
- Available in DLC Parking and Fuel Pump Canopy Distributions. Options available for motion/daylight sensor and internal battery backup.



SKU	Quantity	ETA
CP40AUTP50B000	300	5/30/16
CP55AUTP50B000	200	5/30/16

Distribution	Model	Equivalency	Nominal Wattage	Lumens	Efficacy
Parking Distribution	CP25AUTP50B000	150W MH	25	2633	107
	CP40AUTP50B000	175W MH	40	4019	105
	CP55AUTP50B000	250W MH	52	4999	96
Canopy Distribution	CP25AUTC50B000	150W MH	25	2798	113
	CP40AUTC50B000	175W MH	39	4291	112
	CP55AUTC50B000	250W MH	52	5290	102

Bullet Floods

- Small (12W) and Large (28W) models available in 3000K and 5000K
- Four distributions available (Narrow, Medium, Tight, and Wide)
- All CCTs are DLC Premium
- Shroud included standard



Model	Wattage	Lumens	Efficacy	Beam Type
BF12AUDNXXB000	11	1165	107	NARROW
BF12AUDM30B000	11	1150	106	MEDIUM
BF12AUDT30B000	11	1175	108	TIGHT
BF12AUDW30B000	11	1200	111	WIDE
BF30AUDN30B000	28	3250	118	NARROW
BF30AUDM30B000	28	TBD	TBD	MEDIUM
BF30AUDT30B000	28	3225	118	TIGHT
BF30AUDW30B000	28	3120	114	WIDE

SKU	Quantity	ETA
BF12AUDW50B000	440	4/27 – 5/12/16
BF12AUDW30B000	300	4/27 – 5/12/16
BF30AUDW50B000	250	4/27 – 5/12/16
BF30AUDW30B000	160	4/27 – 5/12/16

Hazardous Location (HLR Series)

- UL Ratings:
 - Class I, Div. 2 (Groups A, B, C, D)
 - Class II, Div. 2 (Groups F, G)
- Available with 9 mounting options for complete application solution
- All models offered with 15kV surge suppression standard
- Marine-grade rated



Model	Equivalency	Wattage	Lumens	Efficacy
HLR80 Series	175W HID	80	8,400	105
HLR110 Series	250W HID	110	11,550	105
HLR140 Series	400W HID	140	14,000	100
HLR170 Series	400W HID	170	17,000	100

SKU	Quantity	ETA
HLR80 Series	20	IN STOCK
HLR110 Series	20	IN STOCK
HLR140 Series	50	IN STOCK
HLR170 Series	50	IN STOCK

The logo features the word "MaxLite" in a bold, sans-serif font. The "M" is white with a green square background, and the "i" has a green dot. A registered trademark symbol (®) is located at the top right of the "e". The background consists of several overlapping, wavy lines in various shades of green, creating a sense of movement and depth.

MaxLite[®]

A NEW WAVE OF LIGHT

LAMPS

Vintage LED Filament Lamps



V2.5B11DLE
D22E



V2.5B11DLE
D22



SB6.5A19DL
ED27



V4.5A19DLE
D22



V4.5T14DLE
D22



V6.5ST18DL
ED22



V6.5G30DLE
D22

Specifications:

- 2.5w LED = 25w Inc., 250lm
- 4.5w LED = 40w Inc., 400lm
- 6.5w LED = 60w Inc., 620-700lm
- CCT: 2200K, 2700K(Silver Bowl)
- CRI: ≥ 80
- Base: E26, E12(B11 Candle)
- 15,000 hour life (3yr warranty)
- Dimmable
- UL
- Suitable for enclosed fixtures

Features & Benefits:

- Same vintage look as tungsten filament incandescent lamps
- Dimmable with standard wall incandescent dimmers
- Unique parallel filament design, amber glass, 2200K

Traditional Shape A-Lamps



6W, 9W, 11W
A19



15W A21



6W, 9W, 11W
GU24



15W
GU24



Specifications:

- 6w, 9w, 11w, 15w (Equiv. 40w, 60w, 75w, 100w)
- 9.5w (90+ CRI), 800 lumens (Equiv. 60w)
- Lumens: 470, 800, 1100, 1600
- CCT: 2700K, 3000K, 4000K
- Energy Star:
 - 2700K, 3000K
 - 4000K (All except the 6w)
- Base: E26, GU24
- CRI: ≥ 82 , 90+
- 25,000 hour life (5yr warranty)
- Dimmable
- UL – Suitable for damp location

Features & Benefits:

- Traditional form factor (A19 & A21)
- General purpose lighting

Enclosed Rated Omni A-Lamps

NEW PRODUCT



Specifications:

- 9w LED = 60w Incandescent
- Lumens: 800
- CCT: 2700K, 3000K
- Base: E26, GU24
- CRI: ≥ 80
- 25,000 hour life (5yr warranty)
- Dimmable
- UL
 - Suitable for damp locations
 - **Suitable for totally enclosed fixtures**
- Energy Star

Features & Benefits:

- Traditional form factor (A19)
- Ideal for enclosed fixtures

3-Way Omni A21

NEW PRODUCT



17A21/3WLED27
17A21/3WLED30

Specifications:

- 5w/10w/17w LED = 40w/60w/100w Inc.
- Lumens: 450/800/1600
- CCT: 2700K, 3000K
- Base: E26
- CRI: ≥ 80
- 25,000 hour life (5yr warranty)
- Suitable for 3-way fixtures
- Non-Dimmable
- UL - Suitable for damp locations
- Energy Star

Features & Benefits:

- Traditional form factor (A21)
- Ideal for table and floor lamps with 3-WAY socket

BR20, BR30, BR40

NEW PRODUCT



7W BR20



8W BR30
11W BR30
12W BR30



17W BR40



Specifications:

- BR20: 7w LED = 50w Inc., 550lm
- BR30:
 - 8w LED = 65w Inc., 650lm
 - 11w LED = 65w Inc., 850lm
 - 12w LED (90CRI) = 65w Inc., 800lm
- BR40:
 - 17w LED = 100w Inc., 1400lm
 - 14w LED (90 CRI) = 75w Inc., 1000lm
- Beam: Flood 110°
- CCT: 2700K, 3000K, 4000K (80CRI only)
- Base: E26
- CRI: ≥ 80, 90+
- 25,000 hour life (5yr warranty)
- Dimmable
- UL - Suitable for damp locations
- Energy Star

Features & Benefits:

- Traditional form factor, smooth heat sink design
- Ideal for recessed cans

PAR20, PAR30LN, PAR38

NEW PRODUCT



7W PAR20



12W PAR30
Long Neck



15W PAR38

Specifications:

- PAR20: 7w LED = 50w Inc., 470lm
- PAR30LN: 12w LED = 75w Inc., 850lm
- PAR38: 15w LED = 120w Inc., 1050lm
- Beam: N. Flood 25°, Flood 40°
- CCT: 2700K, 3000K, 4000K
- Base: E26
- CRI: ≥ 80
- 25,000 hour life (5yr warranty)
- Dimmable
- UL - Suitable for damp locations
- Energy Star (2700K & 3000K only)

Features & Benefits:

- Traditional form factor, smooth heat sink design
- Ideal for track lighting

PAR38 Wet Location



Specifications:

- PAR38: 17w LED = 150w Inc
- Beam: Flood 40°
- CCT: 2700K, 3000K, 4000K, 5000K
- Base: E26
- CRI: ≥ 80
- 25,000 hour life (5yr warranty)
- Dimmable
- UL - Suitable for damp locations
- Energy Star (2700K & 3000K only)

Features & Benefits:

- Traditional form factor, smooth heat sink design
- Ideal for outdoor security lighting



17W PAR38
Wet Location

Candle – B11



Specifications:

- 5w LED = 40w Inc., 325lm
- CCT: 2700K
- Base: E12
- CRI: ≥ 82
- 15,000 hour life (5yr warranty)
- Dimmable
- UL – Suitable for damp locations
- Energy Star

Features & Benefits:

- Ideal for chandelier and wall sconces

Globe – G25



Specifications:

- 6w LED = 40w Inc., 450lm
- CCT: 2700K
- Base: E26
- CRI: ≥ 82
- 25,000 hour life (5yr warranty)
- Dimmable
- UL – Suitable for damp locations
- Energy Star

Features & Benefits:

- Ideal for bath vanity and decorative pendant

Globe – G40

NEW PRODUCT



Specifications:

- 14w LED = 150w Inc., 1300lm
- CCT: 3000K
- Base: E26
- CRI: ≥ 82
- 25,000 hour life (5yr warranty)
- Dimmable
- UL – Suitable for damp locations
- Energy Star

Features & Benefits:

- Ideal for bath vanity and decorative pendant

Puck Lamp

Specifications:

- 9w LED = 60w Inc., 800lm
- 10w LED = 60w Inc., 850-900lm (Non-Dim)
- 10w Compact LED = 60w Inc., 900-1000lm (Non-Dim)
- Universal Voltage: 120-277V
- Base: E26, GU24
- CRI: ≥ 80
- 25,000 hour life (5yr warranty)
- Dimmable (9w only)
- Non-Dimmable (10w)
- UL – Suitable for wet locations (120V), Damp (277V)
- CSD (Energy Star Certified Sub-Component Database)



Features & Benefits:

- Ideal for fan lighting, utility closet lighting, keyless sockets
- Universal voltage (120-277V), wet location @120V

Miniature – G4 & Wedge Base



Specifications:

- 2.5w LED = 20w Inc., 180lm
- Voltage: 12V
- Base: Wedge, G4 Bi-Pin
- CRI: ≥ 80
- 25,000 hour life (5yr warranty)
- Non-Dimmable
- TUV

Features & Benefits:

- Ideal for under cabinet lighting, landscape, pathway lighting

Miniature – G9 Base



SKG03LED27 (Non Dimmable)
SKG03DLED27 (Dimmable)



SKG0905LED27 (Non Dimmable)
SKG0905DLED27 (Dimmable)

Specifications:

- 3w LED = 25w Inc., 220-275lm
- 5w LED = 40w Inc., 360-430lm
- Voltage: 120V
- Base: G9
- CRI: ≥ 80
- 25,000 hour life (5yr warranty)
- Dimmable & Non-Dim available
- TUV

Features & Benefits:

- Ideal for decorative pendant

LED Post Top



30W & 50W



Specifications:

- 30w (125w replacement); 3000-3400lm
- 50w (175w replacement); 5000-5600lm
- 120-277V (ballast bypass)
- Base: E39
- CCT: 3000K, 5000K
- CRI: ≥ 80
- 50,000 hour life (5yr warranty)
- Non-dimming
- UL – suitable for enclosed fixtures
- Suitable for vertical mounting applications only

LED T8 High Efficiency - Bypass



Specifications:

- 4ft
- 12.5w (1800lm), 16.5w (2200lm)
- 120-277V (Single-Ended Power)
- Glass construction
- 330° Beam
- Base: G13 (Medium Bi-Pin)
- CCT: 4000K, 5000K, (3500K special order)
- CRI: ≥ 80 ,
- 50,000 hour life, (10 year warranty optional)
- Non-Dim, No BBU
- UL
- NSF 2 (safe for food locations)
- DLC

LED T8 DirectFit – Ballast Compatible



Specifications:

- 4ft: 15w (Bare Lamp), 18w (Avg. system)
- Replacement for 32W Fluorescent T8
- 1800-1900lm
- 120-277V, 347V (ballast dependent)
- Compatible with instant start, rapid programmed start and emergency ballasts
- Coated Glass
- 330° Beam
- Base: G13 (Medium Bi-Pin)
- CCT: 3500K, 4000K, 5000K
- CRI: ≥80
- 50,000 hour life (5yr warranty)
- Dimmable (w/compatible ballast)
- UL, ETL Sanitation Listing (NSF)
- DLC

LED T5 DirectFit – Ballast Compatible

NEW PRODUCT



Intertek

Specifications:

- 4ft: 27w (Bare Lamp), 30w (Avg. system)
- Replacement for 54W Fluorescent T5HO
- 3000lm
- 120-277V, 347V (ballast dependent)
- Compatible with rapid programmed start ballast
- Coated Glass
- 240° Beam
- Base: G5 (Miniature Bi-Pin)
- CCT: 3500K, 4000K, 5000K
- CRI: ≥80
- 50,000 hour life (5yr warranty)
- UL, ETL Sanitation Listing (NSF)
- DLC

Note: Product is not designed to work with lower wattage T5 ballasts (28w).

LED T8 U-Bend DirectFit



Specifications:

- 2ft: 16w (Bare lamp), 19w (Avg. system)
- Replacement for 32W Fluorescent T8
- 1800lm
- 120-277V, 347V (ballast dependent)
- Compatible with instant start ballasts
- Full plastic
- 320° Beam
- Base: G13 (Medium Bi-Pin)
- CCT: 3500K, 4000K, 5000K
- CRI: ≥ 80
- 50,000 hour life (5yr warranty)
- Non-Dimmable
- UL
- No DLC category

LED PL – Ballast Bypass



6W
E26



6W
GU24



6W
GX23



6W
G24q



8W
E26



8W
GU24



8W
GX23



8W
G24q

Specifications:

- 6w (13w Equiv.), 500-525lm
- 8w (18w Equiv.), 675-725lm
- 120-277V
- Horizontal and Vertical mounting position
- Base rotatable 270° on horizontal models
- 120° Beam
- Base: GX23, G24q, GU24, E26
- CCT: 2700K, 3000K, 3500K, 4000K, 5000K (not all CCTs are available in every base)
- CRI: ≥80
- 50,000 hour life (5yr warranty)
- Non-Dimmable
- UL
- No Energy Star/DLC category

LED PL DirectFit – Ballast Compatible

NEW PRODUCT



13W Horizontal



13W Vertical

Specifications:

- 13w (26w Equiv.), 1000 lumens
- Horizontal and Vertical mounting position
- Base: G24q 4-pin
- CCT: 2700K, 3500K, 4000K
- CRI: ≥ 80
- 50,000 hour life (5yr warranty)
- Instant on
- Non-Dimmable
- Suitable for damp locations
- No Energy Star/DLC category

LED PLL

NEW PRODUCT



Specifications:

- 15w (Bare lamp), 18w (system) – 40w replacement
- 19w (Bare lamp), 22w (system) – 55w replacement
- 1500lm, 1900lm
- 120° Beam
- Base: 2G11
- MOL: 22.5"
- CCT: 3500K, 4000K, 5000K
- CRI: ≥80
- 50,000 hour life (5yr warranty)
- UL
- No Energy Star/DLC category

MAXLITE LIGHTING & TECHNOLOGY UNIVERSITY



For Lighting and Technology

Home | Earn Your Lighting Degree | Common Lighting Terms & Definitions | Other Lighting & Technology Resources | Webinar Library

Welcome to



for Lighting and Technology



Earn Your Lighting Degree



Other Lighting Resources



Webinar Library



Our mission is to provide our representatives, customers and employees with a complete understanding of lighting technologies and the MaxLite product line.

The MaxLite University Lighting Degree program offers three comprehensive courses in lighting fundamentals, ranging from beginner to advanced learning. All courses have been updated to include LED lighting education.

Whether you're a complete lighting novice or continuing your professional development, you are eligible to earn a certificate in our free online degree program. The courses are self-paced, but most lesson units can be completed in 30 minutes to an hour. You will receive a certificate upon completion of the program.

MaxLite University courses are currently eligible for the following continuing education units from the American Lighting Association:

MaxLite University has been updated for 2016! All three courses now include information on LED technology, fixtures, lamps, ENERGY STAR and other certifications.



MaxLiteUniversity.com

MAXLITE'S UTILITY REBATE SERVICES

MaxLite makes it easy to find and complete rebates for you and your customers!

- C&I Rebate Finder
- Utility Rebate Flyers
- Custom Rebate Calculator
- DLC / ENERGY STAR / LDL Product Listings
- Utility Rebate Paperwork Service



Email Joe Pater at jpater@maxlite.com for more info!

QUESTIONS/ANSWERS

Thank you everyone for your attention! Please feel free to use this opportunity to ask any questions you may have about MaxLite or the products shown in this presentation.

FOR MORE INFORMATION ABOUT OTHER MAXLITE PRODUCTS, OR
FOR LIGHTING QUESTIONS IN GENERAL; PLEASE CONTACT:

info@maxlite.com

<http://www.maxlite.com>

1-800-555-5629