

LED

PRODUCT CATALOG

MaxLite®

2021

Our Vision:

Transform the way people experience light

MaxLite has provided certified energy-efficient lighting solutions to the commercial building, industrial, residential and OEM markets since 1993. One of the first movers into LED technology in the industry, MaxLite offers an extensive line of indoor and outdoor LED lamps and luminaires. We are a five-time recipient of the ENERGY STAR® Partner of the Year Award for our industry leadership and continue to be at the forefront of energy-efficient technologies through innovative product research and development.



(HQ) West Caldwell, NJ

Our Products:

MaxLite supports our products with industry-leading warranties and customer support. Most MaxLite products are certified by ENERGY STAR® or listed by DesignLights Consortium® (DLC) and qualify for utility rebate programs. We also offer a large selection of lamps and luminaires that meet Title 20 and Title 24 JA8-2016/2019-E requirements in California. Our products are stocked for immediate purchase and delivery, shipping within the United States in two business days on standard orders.



Greenwood, IN

Our Services:

We work with our customers to ensure that our products meet the needs of their installation by providing a full range of complimentary services, including:

- Facility audits
- Lighting layouts
- ROI calculations
- Utility rebate assistance
- Local representation
- Lifetime product support



Anaheim, CA



Nationally Certified Minority Business Enterprise

MaxLite is a nationally certified Minority Business Enterprise (MBE) by the National Minority Supplier Diversity Council (NMSDC). We also hold state-level MBE certifications – contact us for details.



10-Year Warranty - Labor Included!*

MaxLite offers a 10-year limited warranty on most LED indoor and outdoor fixtures.

Go to [MaxLite.com/warranties](https://www.maxlite.com/warranties) for applicable terms and conditions.

*registration required

Design Innovation



MaxLite holds 110 design patents.

Our products have received numerous awards, including:



Key Distribution Segments & Strengths

STOCK & FLOW Counter Business MRO



PROJECT SALES Quick Ship



DESIGN-BUILD Value Engineered



ENERGY SERVICES ESCO



NATIONAL ACCOUNTS National Chains



WARRANTY

.....2-4

CONTROLS

.....5

INDOOR LED FIXTURES

BayMAX™ LED HL Linear High Bays - Gen 2	6
LED Linear High Bays - ECO Series Gen 3	6
LED High Bay Round Pendants - Gen 2	7
LED High Bay Round ECO Pendants	7
High Temperature LED Round High Bay	7
LED Direct/Indirect Round Pendant	8
LED Direct/Indirect Pendant Panels	8
LED LiteBar™	9
TriMAX™ LED Vapor Tight Fixtures - Gen 2	10
LED Vapor Tight Fixtures	10
LED ECO Vapor Tight Fixtures	10
LED Vapor Tight Fixtures w/ Selectable Wattage & CCT Controls Ready	11
LED Utility Wrap Fixtures	12
LED Wide Body Utility Wrap Fixtures	12
LED ECO Utility Wrap Fixtures	12
LED Utility Wrap Fixtures w/ Selectable Wattage & CCT Controls Ready	13
L-Max™ Linear LED Luminaire	14
LED Linear Strip	14
LED Linear Retrofit Strip	14
LED Linear Strip Gen 2 w/ Selectable Wattage & CCT Controls Ready	15
LED Shop Lights	16
LED Cooler and Freezer Lamps	16
LED T8 Lamp Ready Fixtures	17-18
FlatMAX® LED Flat Panels w/ Selectable CCT	19
FlatMAX® LED Flat Panels w/ Selectable Wattage & CCT - Gen 4	20
FlatMAX® LED Flat Panels w/ Selectable Wattage & CCT - Gen 4 Controls Ready	21
ArcMAX™ LED Troffer w/ Selectable Wattage & CCT	22
ArcMAX™ LED Troffer w/ Selectable Wattage & CCT Controls Ready	23
LED Lensed Retrofit Kits	24
LED Flat Panel Retrofit Kits	24
LED Troffer Retrofit Kits	24
Troffer Retrofit Kit w/ Selectable Wattage & CCT Controls Ready	25
LED Emergency Lights	26
LED Exit Signs	26
RRC LED Light Engines & Reflectors	27
LED Commercial Downlight Retrofits Economical Series	28
LED Universal RCF Series Downlights w/ Selectable CCT	28-29
LED Commercial Downlight w/ Selectable Wattage & CCT Universal RCF Series	29-30
LED Residential Retrofit Downlights w/ Selectable CCT	30
LED Adjustable Residential Retrofit Downlights w/ Selectable CCT	31
Slim Downlights w/ Selectable CCT	31

RESIDENTIAL FIXTURES

LED Wall Sconces	32
LED Vanity Bars	33
LED Flush Mounts	34-36
LED Light Engines/Retrofit Kits	36
LED Disc Light	36
Bulb in Box Indoor Fixtures	37
Bulb in Box Outdoor Fixtures	38
LED Outdoor Lanterns	38-39

OUTDOOR LED FIXTURES

MPulse™ Bollards	40
MPulse™ Flood Lights	40
MPulse™ Wall Mount Luminaire	41
MPulse™ Canopy Series	41
MPulse™ Area Light	41
MPulse™ High Output Flood Lights	42
FieldMax™ High Output Flood Lights	43
QuadroMAX® Plus Modular Lighting Fixtures	44
LED Slim Area Lights	44
LED Slim Flood Lights	44
LED Bullet Flood Lights - Gen B	45

OUTDOOR LED FIXTURES

FloodMax™ LED Flood Lights	45
Steel Poles	46-47
Aluminum Poles	46-47
Mounting Accessories	48
PathMax™ Classic Series Round Flat Top Bollards	49
PathMax™ Classic Series Round Dome Top Bollards	49
WallMAX™ LED Cut Off Wall Packs w/ Selectable CCT	50
WallMAX™ LED Open Face Wall Packs	50
WallMAX™ LED Thin Cut Off Wall Packs w/ Selectable CCT	50
LED Dusk to Dawn Barn Lights w/ Selectable CCT	51
GuardMAX™ LED Entry Wall Packs	51
GuardMAX™ LED Emergency Wall Packs	51
GuardMAX™ LED Slim Profile Security Light w/ Selectable CCT	52
Bulb in Box - Cylinder & Globe Security Fixture	52
LED Lamp Ready Vaporproof Jelly Jars	52
LED Universal Adjustable Jelly Jar w/ Selectable CCT	53
LED Low-Profile Canopy Luminaires	53
LED Low-Profile Parking Garage Canopy Luminaires	53

HARSH & HAZARDOUS

Harsh & Hazardous Floods	54
Harsh & Hazardous High Output Floods	54
Harsh & Hazardous Linear	55
Harsh & Hazardous Wall Packs	55
Harsh & Hazardous High Bays	56
Harsh & Hazardous Low Bay/Jelly Jars	56

HORTICULTURE

PhotonMAX® Horticulture LED Spot Lights	57
PhotonMAX® Horticulture LED Linear Lights	58
PhotonMAX® Horticulture Ceramic Metal Halide Fixtures	59
PhotonMAX® Horticulture Doubled-Ended High Pressure Sodium Fixtures	59
PhotonMAX® Horticulture Ceramic Metal Halide Lamp	59
PhotonMAX® Horticulture Doubled-Ended High Pressure Sodium Lamp	59

GENERAL PURPOSE LAMPS

LED Filament Lamps	60-62
LED Omni-Directional A-Lamps	63
LED High Output Omni-Directional A-Lamps	64
LED Rough Service Omni-Directional A-Lamps	65
LED Value Omni-Directional A-Lamps	65
LED Omni-Directional 3-Way A-Lamps	65
LED Globe Lamps	66
LED PL DirectFit Ballast Compatible Retrofit Lamps w/ Selectable CCT	66
LED PL Retrofit Lamps w/ Selectable CCT	67
LED G4 & Wedge Retrofit Lamps	68
LED G9 Retrofit Lamps	68
LED MR16 Lamps	68-69
LED BR Lamps	70
LED Value BR Lamps	70
LED PAR Lamps	71
LED 277V PAR Lamps	71
LED High Output Wet Rated PAR Lamps	72
LED Value PAR Lamps	72
LED DirectFit T8 U-Bend Lamps	73
LED DirectFit T8 Linear Lamps	73-74
LED DirectFit T5 Linear Lamps	74
LED Internal Driver T8 U-Bend Lamps	74
LED Internal Driver T8 Single-Ended	75-76
Power Ballast Bypass	
LED Internal Driver T8 Single-Ended or Double-Ended Power	76-77
LED Internal Driver T8 Single-Ended/Double-Ended Power Ballast Bypass	78
Emergency Battery Backup For Type-B Linear Lamps	78
LED External Driver Dimmable T8 Linear Lamps	79
LED External Driver Dimmable T5 Linear Lamps	79
Emergency Battery Backup For Type-C Linear Lamps	79
LED External Driver U-Bend Linear Lamps	80
LED Dual-Mode/Hybrid Series T8 Linear Lamps	80
LED Single-End Powered Wiring Harnesses	80
G13 U-Bend Bypass Non-Shunted Lamp Holders	80
LED PLL Plug & Play Lamps	81
LED PLL Bypass Lamps	81
LED High Bay Ballast Bypass Lamps	82
LED Post Tops	82

WarrantyMax™ 10-Year Warranty

Key Features

Customers receive automatic 10-Year warranty coverage of most commercial and industrial LED fixtures - no registration or minimum product purchase required!*

	HIGHLIGHTS
Eligibility	Automatic with purchase *registration required for labor allowance
Start Date	Actual installation date, or 90 days after the original date of purchase (whichever comes first)
Minimum Purchase	No
Labor Allowance	\$25 / Unit on eligible models; Higher levels available for purchase
Operating Hours	16 hours/day maximum
Operating Temperature	-29°F to 104°F outdoor -4°F to 77°F indoor
Additional Coverage Available	YES!

Additional Coverage Available for:



Eligible products with a warranty of less than 10 years



Higher labor allowance
(\$350 coverage minimum applies;
contact your MaxLite sales
representative for details)

Extended coverage must be added within 90 days of original purchase. All warranties are in effect only if the products are installed for and used in an application and operating temperature range for which it is rated, per the applicable product data sheet.

Warranty registration forms, and complete Standard Product Warranty Coverage Terms and Conditions, are available at:
www.maxlite.com/warranties

MaxLite may refuse, at its sole discretion, to allow extended warranty coverage to be added.

Standard Product Warranty Coverage

CATEGORY	DESCRIPTION	YEARS
LAMPS & TUBES	Value Series Lamps (Types A, PAR, & BR)	1
	Decorative Lamps (Candelabra & Filament Lamp)	3
	All other screw base & GU base lamps	5
	2' to 8' LED tubes	5
RESIDENTIAL APPLICATIONS	Residential Downlights	5
	Retrofit Kits (Residential Downlight & Flush Mount)	5
	Sconces & Flush Mount Residential Fixtures	5
	Vanity Bars & Lanterns	5
	Desk Lamps and Torchieres	5
COMMERCIAL & INDUSTRIAL APPLICATIONS	Light Bars	5
	Shop Lights	5
	Harsh & Hazardous	5
	Horticulture HID Fixtures	3
	Horticulture LED Fixtures	5
	GuardMAX Security	5
	Vaporproof Jelly Jars	5
	Barn Lights	5
	Polygon LSP Series LowBay/Parking Garage Fixtures	5
	Universal Commercial Downlight	5
	High Temperature High Bay	5
	MPulse and QuadroMAX fixtures	10
	Area and Flood Lights (AR, FL, FLS, FML, FMM, FMS, FMX, & BF Series)	10
	WallMAX Wallpacks	10
	Canopy and LowBay/Parking Garage Fixtures (CPL Series)	10
	Bollards	10
	Panels & Troffers	10
	Downlights (non-J-box mounted)	10
	Retrofit Kits (TRK, LRK, RS)	10
	High Bays (excludes HPH)	10
	Linear Fixtures (L-Max, VT, LF, LS, LSU, LSUECO, LSV, & LSVECO)	10
	Pendants (Commercial Round & Direct/Indirect)	10
OTHER	Mounting Accessories	1
	Poles	3
	Exit & Emergency Lighting	5
	Motion and/Or Daylight Sensors	5
	LED Sign Modules	5
	Magnetic Ballast	5
	Non-LED Lamps	5

NOTES:

- For any product not listed above, contact MaxLite for warranty information.
- Any products marked as Clearance shall carry the lesser of a 5 Year warranty, or the warranty period stated on the product data sheet.
- All 10 Year warranties are based on a maximum 16 hrs/day operation, and ambient temperature of -29°F to 104°F (outdoor) and -4°F to 77°F (indoor), and include up to a \$25 labor allowance per item (registration for labor allowance required). If ambient temperatures fall outside the -4°F to 77°F range, product is warranted for 5 years according to the operating temperature range specified on the PDS.
- Extended warranty coverage may be purchased for products with a 5-year warranty, or for a higher labor allowance on products with a 10-year warranty. Standard warranty terms and conditions apply. Contact your MaxLite representative for product eligibility and pricing. Minimum purchase and site registration required.
- Warranty start date is the earlier of the actual installation date, or 90 after the original purchase (whichever comes first).
- It is not a requirement to register the warranty to receive product replacement warranty coverage; however, you must register the warranty if you want to be eligible to receive the labor allowance associated with the 10 Year Warranty.
- Accessories and emergency battery backup excluded. Motion sensor and Photocontrol components follow supplier's warranty.
- Warranty claim and registration forms, and complete Standard Product Warranty Coverage Terms and Conditions, are available at: www.maxlite.com/warranties



WarrantyMax™ 10-Year Warranty

MaxLite provides the opportunity to expand our industry-leading warranty coverage through the purchase of an extended warranty.

What does an Extended Warranty cover?

An extended warranty provides further peace of mind for critical lighting projects by expanding coverage as follows:

1. Extends the warranty period to 10 years for material or labor coverage on products that have a standard warranty of less than 10 years.
2. Increases labor coverage for products that are registered. The labor allowance is \$25 when a product is registered. The extended warranty enables the customer to purchase additional labor coverage beyond \$25. Pricing will vary depending on the amount of additional labor coverage desired.

Eligible Product Categories

The following product families are currently eligible for extended warranty coverage:

INDOOR



DOWNLIGHT FIXTURES



HIGHBAY FIXTURES



LINEAR FIXTURES



PANEL FIXTURES

LAMPS



T LEDS



T SHAPE, T2, T5, T8, T8 (BAA), U Bend

OUTDOOR



AREA LIGHT FIXTURES



BOLLARD FIXTURES



CANOPY FIXTURES



FLOOD FIXTURES



WALL PACKS



MPULSE SERIES

How do I purchase an extended warranty?

1. Select products from the list of Eligible Product Categories.
2. Contact your MaxLite sales or customer service representative and advise that you want to purchase a warranty extension to 10 years and/or additional labor coverage. They will advise the price.
3. There is a \$350 warranty coverage minimum per project, and a single project can have multiple locations. Your MaxLite representative can help you determine whether your project will meet the \$350 coverage minimum.
4. You will need to register the project by filling out a simple one page form. Each site location will need to be registered.
5. MaxLite's standard warranty terms and conditions apply, such as operating conditions and hours. Third party components (sensors and batteries) are not included.

Lighting Controls Your Way



We can install what you need! *

MaxLite supports stand-alone and luminaire integrated basic controls offering daylight harvesting, motion sensing, bi-level dimming and photocell capabilities. In addition, MaxLite can provide network wireless control solutions from other industry leading controls manufacturers. Ask your customer relations manager for details.



*Contact your customer relations manager for availability and lead times.

BayMAX™ LED HL Linear High Bays - Gen 2



CCTs Available:



MODEL NUMBER	HL-090UF-50	HL-130UF-50	HL-160UF-50	HL-185UF-50
ORDER CODE	14099568	14099570	14099572	14099574
Input Wattage	90W	130W	160W	185W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	11,800 lm	16,770 lm	20,990 lm	24,250 lm
Efficacy (lm/W)	129 lm/W	131 lm/W	133 lm/W	137 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	5000K	5000K	5000K	5000K
Replacement	4 Lamp T5HO/250W	6 Lamp T5HO/400W	6+ Lamp T5HO/400W	8 Lamp T5HO/600W
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours	100,000 hours
LISTINGS	cULus (Damp Listed), DLC Premium, FCC	cULus (Damp Listed), DLC Premium, FCC	cULus (Damp Listed), DLC Premium, FCC	cULus (Damp Listed), DLC Premium, FCC

Surface mount and stem mount kits available.
*Contact MaxLite for lead times.

LED 2' Linear High Bays - ECO Series Gen 3



CCTs Available:



MODEL NUMBER	BLHE3-065UF-40*	BLHE3-085UF-40	BLHE3-130UF-40	BLHE3-170UF-40	BLHE3-210UF-40
ORDER CODE	105362	105366	105370	105374	105378
Input Wattage	65W	85W	130W	170W	210W
Voltage	120-277V	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	8,450 lm	11,475 lm	17,550 lm	22,950 lm	28,350 lm
Efficacy (lm/W)	130 lm/W	135 lm/W	135 lm/W	135 lm/W	135 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80	≥80
Color Temperature (CCT)	4000K	4000K	4000K	4000K	4000K
Dimming Compatible	0-10V	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L90)	100,000 hours	100,000 hours	100,000 hours	100,000 hours	100,000 hours
LISTINGS	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium

Surface mount and stem mount kits available.
*DLC is low bay qualified.

LED 4' Linear High Bays - ECO Series Gen 3



CCTs Available:



MODEL NUMBER	BLHE3-255UF-40	BLHE3-300UF-40	BLHE3-400UF-40
ORDER CODE	105382	105386	105390
Input Wattage	255W	300W	400W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	34,425 lm	40,500 lm	54,000 lm
Efficacy (lm/W)	135 lm/W	135 lm/W	135 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	4000K	4000K	4000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L90)	100,000 hours	100,000 hours	100,000 hours
LISTINGS	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium

Surface mount and stem mount kits available.

LED High Bay Round Pendants - Gen 2



CCTs Available:



MODEL NUMBER	HP-090UF-50	HP-130UF-50	HP-160UF-50	HP-185UF-50
ORDER CODE	1410223	1410225	1410227	1410229
Input Wattage	90W	130W	160W	185W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	12,100 lm	17,900 lm	22,260 lm	25,770 lm
Efficacy (lm/W)	137 lm/W	138 lm/W	140 lm/W	143 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	5000K	5000K	5000K	5000K
Replacement	4 Lamp T5HO/250W	6 Lamp T5HO/400W	6+ Lamp T5HO/400W	8 Lamp T5HO/600W
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours	100,000 hours
LISTINGS	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium

Pipe and surface mount options available. Polycarbonate shade and drop lens available.
*Contact MaxLite for lead times.

LED High Bay Round ECO Pendants



CCTs Available:



MODEL NUMBER	BPHE-100UW-40	BPHE-150UW-40	BPHE-180UW-40	BPHE-240UW-40
ORDER CODE	14100743	14100744	14100745	14100746
Input Wattage	100W	150W	180W	240W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	13,000 lm	19,500 lm	23,400 lm	31,200 lm
Efficacy (lm/W)	130 lm/W	130 lm/W	130 lm/W	130 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	4000K	4000K	4000K	4000K
Replacement	4 Lamp T5HO/250W	6 Lamp T5HO/400W	6+ Lamp T5HO/400W	8 Lamp T5HO/600W
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours	100,000 hours
LISTINGS	DLC, cULus, IP65	DLC, cULus, IP65	DLC, cULus, IP65	DLC, cULus, IP65

High Temperature LED Round High Bay



CCTs Available:



MODEL NUMBER	HPH240UC-40	HPH240UC-50
ORDER CODE	14100209	14100213
Input Wattage	240W	240W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	31,098 lm	31,200 lm
Efficacy (lm/W)	130 lm/W	130 lm/W
Color Rendering Index (CRI)	≥80	≥80
Color Temperature (CCT)	4000K	5000K
Replacement	600W MH	600W MH
Dimming Compatible	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	DLC, FCC, Wet Rated cULus, IP66	DLC, FCC, Wet Rated cULus, IP66

LED 24" Direct/Indirect Round Pendant



CCTs Available:

3500K

4000K

MODEL NUMBER	MLRP24E4035I
ORDER CODE	1410240
Input Wattage	40W
Voltage	120-277V
Delivered Lumens (lm)	3,200 lm
Efficacy (lm/W)	89 lm/W
Color Rendering Index (CRI)	>80
Color Temperature (CCT)	3500K
Dimming Compatible	0-10V
Lumen Maintenance (L70)	50,000 hours
LISTINGS	FCC, cETLus

LED 1x4 Direct/Indirect Pendant Panels



CCTs Available:

3500K

4000K

MODEL NUMBER	WHITE LENS	TRANSPARENT LENS
	MLFP14DI3635I	MLFP14DI3640ICL
ORDER CODE	14098821	14098822
Input Wattage	36W	36W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	4,396 lm	4,721 lm
Efficacy (lm/W)	112 lm/W	120 lm/W
Color Rendering Index (CRI)	80	80
Color Temperature (CCT)	3500K	4000K
Dimming Compatible	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	FCC, cETLus	FCC, cETLus

LED LiteBar™



CCTs Available:



	6"	12"	24"
MODEL NUMBER	LB0627	LB1227	LB2427
ORDER CODE	1409841	1409846	1409851
Input Wattage	2W	4W	8W
Voltage	120V	120V	120V
Delivered Lumens (lm)	148 lm	341 lm	657 lm
Efficacy (lm/W)	70 lm/W	79 lm/W	84 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	2700K	2700K	2700K
Dimming Compatible	Triac, ELV	Triac, ELV	Triac, ELV
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	ENERGY STAR®, cULus, FCC	ENERGY STAR®, cULus, FCC	ENERGY STAR®, cULus, FCC

LED LiteBar™



CCTs Available:



	36"	48"
MODEL NUMBER	LB3627	LB4827
ORDER CODE	1409866	1409856
Input Wattage	12W	16W
Voltage	120V	120V
Delivered Lumens (lm)	987 lm	1,330 lm
Efficacy (lm/W)	81 lm/W	83 lm/W
Color Rendering Index (CRI)	≥80	≥80
Color Temperature (CCT)	2700K	2700K
Dimming Compatible	Triac, ELV	Triac, ELV
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	ENERGY STAR®, cULus, FCC	ENERGY STAR®, cULus, FCC

Optional Accessories:



LB-BBC - 14098894
Bar-Bar Connector



LB-BBCF4 - 14098897
Bar-Bar Connector, Flexible 4"



LB-BBCF12 - 14098898
Bar-Bar Connector, Flexible 12"



LB-BBCF40 - 14098899
Bar-Bar Connector, Flexible 40"



LB-BBCR - 14098896
Bar-Bar Connector, 90 deg right



LB-BBCL - 14098895
Bar-Bar Connector, 90 deg left



LB-MB - 14098902
Mounting Bracket (2pcs per)



LB-PMB - 14098903
Pivot Mounting Bracket (2pcs per)



LB-MMB - 14098904
Magnetic Mounting Bracket (2pcs per)



LB-CBOX - 14098906
Connector Box



LB-DBOX - 14098905
Distribution Box




LB-HWC70 - 14098900
70" Hardwire Cord



LB-PC48 - 14098901
40" Plug Cord

TriMAX™ LED Vapor Tight Fixtures - Gen 2



CCTs Available:



MODEL NUMBER	4' VT-V4830U-40	4' VT-V4850U-40
ORDER CODE	14099648	14099650
Input Wattage	30W	50W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	3,790 lm	6,480 lm
Efficacy (lm/W)	127 lm/W	126 lm/W
Color Rendering Index (CRI)	≥80	≥80
Color Temperature (CCT)	4000K	4000K
Replacement	2 x 32W T8	3 x 32W T8
Dimming Compatible	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours
LISTINGS	cETLus, FCC, DLC Premium, ETL Sanitization	cETLus, FCC, DLC Premium, ETL Sanitization

Connector kit available. EM and MS options also available.

LED Vapor Tight Fixtures



CCTs Available:



MODEL NUMBER	2' LSV2U2540	4' LSV4U2540	4' LSV4U3540	4' LSV4U4540
ORDER CODE	14099611	14099613	14099615	14099617
Input Wattage	25W	25W	35W	45W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,040 lm	3,215 lm	4,715 lm	6,250 lm
Efficacy (lm/W)	134 lm/W	137 lm/W	138 lm/W	138 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	4000K	4000K	4000K	4000K
Replacement	2 x 17W T8	2 x 32W T8	2 x 32W T8 or 1 x 54W T5HO	4 x 32W T8
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours	100,000 hours
LISTINGS	TAA, cULus, FCC, DLC Premium	TAA, cULus, FCC, DLC Premium	TAA, cULus, FCC, DLC Premium	TAA, cULus, FCC, DLC Premium

*Contact MaxLite for lead times.

LED ECO Vapor Tight Fixtures



CCTs Available:



MODEL NUMBER	4' LSVECO-4DU4040	4' LSVECO-4DU4050
ORDER CODE	14099111	14099112
Input Wattage	40W	38W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	4,400 lm	4,480 lm
Efficacy (lm/W)	110 lm/W	112 lm/W
Color Rendering Index (CRI)	≥80	≥80
Color Temperature (CCT)	4000K	5000K
Replacement	3 x 32W T8	3 x 32W T8
Dimming Compatible	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	cULus, FCC	cULus, FCC

LED 2' Vapor Tight Fixtures w/ Selectable Wattage & CCT Controls Ready



CCTs Available:



MODEL NUMBER	LSV2U20WCSCR		
ORDER CODE	105606		
Input Wattage	20W	25W	30W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,852/2,944/2,888 lm	3,445/3,661/3,544 lm	4,173/4,255/4,113 lm
Efficacy (lm/W)	142/149/144 lm/W	146/154/146 lm/W	143/146/142 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	100,000 hours	100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

LED 4' Vapor Tight Fixtures w/ Selectable Wattage & CCT Controls Ready



CCTs Available:



MODEL NUMBER	LSV4U23WCSCR		
ORDER CODE	105607		
Input Wattage	23W	35W	48W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,429/3,483/3,430 lm	4,677/4,782/4,687 lm	6,429/6,609/6,342 lm
Efficacy (lm/W)	146/150/146 lm/W	142/149/143 lm/W	146/145/135 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	100,000 hours	100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

LED 8' Vapor Tight Fixtures w/ Selectable Wattage & CCT



CCTs Available:



MODEL NUMBER	LSV8U65WCS		
ORDER CODE	105687		
Input Wattage	65W	75W	90W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	8,840/8,905/9,620 lm	9,975/10,050/10,125 lm	11,700/11,790/11,880 lm
Efficacy (lm/W)	136/137/148 lm/W	133/134/135 lm/W	130/131/132 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	100,000 hours	100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

LED Utility Wrap Fixtures



CCTs Available:



	2'	4'	4'	4'
MODEL NUMBER	LSU2U2540	LSU4U2540	LSU4U3540	LSU4U4540
ORDER CODE	14099619	14099621	14099623	14099625
Input Wattage	25W	25W	35W	45W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,960 lm	3,100 lm	4,460 lm	6,060 lm
Efficacy (lm/W)	128 lm/W	130 lm/W	130 lm/W	130 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	4000K	4000K	4000K	4000K
Replacement	2 x 17W T8	2 x 32W T8	3 x 32W T8 or 1 x 54W T5HO	4 x 32W T8
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours	100,000 hours
LISTINGS	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium, NSF	cULus, FCC, DLC Premium, NSF	cULus, FCC, DLC Premium, NSF

*Contact MaxLite for lead times.

LED Wide Body Utility Wrap Fixtures



CCTs Available:



	4'
MODEL NUMBER	LSUW4U6240
ORDER CODE	102930
Input Wattage	62W
Voltage	120-277V
Delivered Lumens (lm)	8,060 lm
Efficacy (lm/W)	130 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	4000K
Replacement	4 x 32W T8 or 2 x 54W T5HO
Dimming Compatible	0-10V
Lumen Maintenance (L70)	100,000 hours
LISTINGS	cULus, DLC Premium

LED ECO Utility Wrap Fixtures



CCTs Available:



	4'
MODEL NUMBER	LSUECO-4DU4040
ORDER CODE	14099110
Input Wattage	41W
Voltage	120-277V
Delivered Lumens (lm)	4,289 lm
Efficacy (lm/W)	104 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	4000K
Replacement	3 x 32W T8
Dimming Compatible	0-10V
Lumen Maintenance (L70)	50,000 hours
LISTINGS	cULus, FCC

LED 2' Utility Wrap Fixtures w/ Selectable Wattage & CCT Controls Ready



CCTs Available:



MODEL NUMBER	LSU2U20WCSCR		
ORDER CODE	105658		
Input Wattage	20W	25W	30W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,781/2,843/2,774 lm	3,292/3,398/3,285 lm	3,847/3,964/3,796 lm
Efficacy (lm/W)	132/138/132 lm/W	131/138/130 lm/W	131/138/128 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	100,000 hours	100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

LED 4' Utility Wrap Fixtures w/ Selectable Wattage & CCT Controls Ready



CCTs Available:



MODEL NUMBER	LSU4U23WCSCR		
ORDER CODE	105664		
Input Wattage	23W	35W	48W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,408/3,432/3,456 lm	4,692/4,726/4,760 lm	6,070/6,472/6,366 lm
Efficacy (lm/W)	142/143/144 lm/W	138/139/140 lm/W	129/142/135 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	100,000 hours	100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

L-Max™ Linear LED Luminaire



CCTs Available:



	2'	4'	4'
MODEL NUMBER	LM-2420UF-40	LM-4840UF-40	LM-4860UF-40
ORDER CODE	14100472	14099780	14099783
Input Wattage	20W	40W	60W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,569 lm	5,261 lm	7,923 lm
Efficacy (lm/W)	133 lm/W	132 lm/W	133 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	4000K	4000K	4000K
Replacement	2 x 17W T8	3 x 32W T8	4 x 32W T8, 2x54W T5
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	DLC Premium, ETL Listed, FCC, Damp Rated	DLC Premium, ETL Listed, FCC, Damp Rated	DLC Premium, ETL Listed, FCC, Damp Rated

EM and MS options are not available together in any CCT.

LED 8' Linear Strip



CCTs Available:



	8'
MODEL NUMBER	LS2-9690U-50
ORDER CODE	14100444
Input Wattage	90W
Voltage	120-277V
Delivered Lumens (lm)	11,995 lm
Efficacy (lm/W)	134 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	5000K
Replacement	2 x F96W T12HO or 2 x 110W T12HO
Dimming Compatible	0-10V
Lumen Maintenance (L70)	100,000 hours
LISTINGS	cULus (Damp Listed), DLC, FCC

LED Linear Retrofit Strip



CCTs Available:



	4'	4'
MODEL NUMBER	RS-4835U-50	RS-4846U-50
ORDER CODE	1409412	1410111
Input Wattage	35W	46W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	4,620 lm	5,980 lm
Efficacy (lm/W)	132 lm/W	130 lm/W
Color Rendering Index (CRI)	≥80	≥80
Color Temperature (CCT)	5000K	5000K
Replacement	2 x 32W T8	2 x 32W T8
Dimming Compatible	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	cULus (Damp Listed), DLC Premium, FCC	cULus (Damp Listed), DLC Premium, FCC

LED 2' Linear Strip Gen 2 w/ Selectable Wattage & CCT Controls Ready



CCTs Available:

3500K

4000K

5000K

**MODEL NUMBER****LS2-2U20WCSCR****ORDER CODE****105620**

Input Wattage

20W

25W

30W

Voltage

120-277V

120-277V

120-277V

Delivered Lumens (lm)

2,779/2,934/2,871 lm

3,356/3,587/3,474 lm

3,891/4,213/4,021 lm

Efficacy (lm/W)

133/143/138 lm/W

131/143/135 lm/W

128/142/133 lm/W

Color Rendering Index (CRI)

≥80

≥80

≥80

Color Temperature (CCT)

3500/4000/5000K

3500/4000/5000K

3500/4000/5000K

Dimming Compatible

0-10V

0-10V

0-10V

Lumen Maintenance (L70)

≥100,000 hours

100,000 hours

100,000 hours

LISTINGS

cULus, FCC, DLC

cULus, FCC, DLC

cULus, FCC, DLC

LED 4' Linear Strip Gen 2 w/ Selectable Wattage & CCT Controls Ready



CCTs Available:

3500K

4000K

5000K

**MODEL NUMBER****LS2-4U23WCSCR****ORDER CODE****105626**

Input Wattage

23W

35W

48W

Voltage

120-277V

120-277V

120-277V

Delivered Lumens (lm)

3,523/3,666/3,603 lm

4,712/4,926/4,805 lm

6,484/6,919/6,621 lm/W

Efficacy (lm/W)

141/150/145 lm/W

139/150/143 lm/W

131/145/135 lm/W

Color Rendering Index (CRI)

≥80

≥80

≥80

Color Temperature (CCT)

3500/4000/5000K

3500/4000/5000K

3500/4000/5000K

Dimming Compatible

0-10V

0-10V

0-10V

Lumen Maintenance (L70)

≥100,000 hours

100,000 hours

100,000 hours

LISTINGS

cULus, FCC, DLC

cULus, FCC, DLC

cULus, FCC, DLC

LED 8' Linear Strip Gen 2 w/ Selectable Wattage & CCT Controls Ready



CCTs Available:

3500K

4000K

5000K

**MODEL NUMBER****LS2-8U65WCSCR****ORDER CODE****105632**

Input Wattage

65W

75W

90W

Voltage

120-277V

120-277V

120-277V

Delivered Lumens (lm)

12,649/13,056/12,445 lm

10,879/11,238/10,660 lm

9,551/9,748/9,254 lm

Efficacy (lm/W)

135/143/132 lm/W

139/148/136 lm/W

144/150/139 lm/W

Color Rendering Index (CRI)

≥80

≥80

≥80

Color Temperature (CCT)

3500/4000/5000K

3500/4000/5000K

3500/4000/5000K

Dimming Compatible

0-10V

0-10V

0-10V

Lumen Maintenance (L70)

≥100,000 hours

100,000 hours

100,000 hours

LISTINGS

cULus, FCC, DLC

cULus, FCC, DLC

cULus, FCC, DLC

LED Shop Light



CCTs Available:

5000K

4'

MODEL NUMBER	SL-48231-50
ORDER CODE	14101698
Input Wattage	23W
Voltage	120-277V
Delivered Lumens (lm)	2,400 lm
Efficacy (lm/W)	104 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	5000K
Replacement	1x 32WT8
Dimming Compatible	0-10V
Lumen Maintenance (L70)	50,000 hours
LISTINGS	cETLus, FCC, ENERGY STAR

LED Shop Light



CCTs Available:

5000K

4'

MODEL NUMBER	SL-48421-50
ORDER CODE	14099808
Input Wattage	42W
Voltage	120-277V
Delivered Lumens (lm)	4,890 lm
Efficacy (lm/W)	122 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	5000K
Replacement	2 x 32W T8
Dimming Compatible	0-10V
Lumen Maintenance (L70)	50,000 hours
LISTINGS	cETLus, FCC, ENERGY STAR

LED Cooler and Freezer Lamps



CCTs Available:

4000K

48"

60"

72"

MODEL NUMBER	RL-4818U-40	RL-6022U-40	RL-7226U-40
ORDER CODE	107990	107991	107992
Input Wattage	18W	22W	26W
Voltage	120V	120V	120V
Delivered Lumens (lm)	1,440 lm	1,810 lm	2,170 lm
Efficacy (lm/W)	85 lm/W	82 lm/W	84 lm/W
Color Temperature (CCT)	4000K	4000K	4000K
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus (Damp Listed), FCC	cULus (Damp Listed), FCC	cULus (Damp Listed), FCC

LED T8 Lamp Ready 4' High Bays



MODEL NUMBER	BLHT4XT8USE4810	BLHT6XT8USE4815	BLHT8XT8USE4820
ORDER CODE	75428	75429	75430
Number of Lamps	4 x T8 LED	6 x T8 LED	8 x T8 LED
Voltage	120-277V	120-277V	120-277V
Max Wattage	22W Per Lamp	22W Per Lamp	22W Per Lamp
LISTINGS	cULus (Damp Listed)	cULus (Damp Listed)	cULus (Damp Listed)

See Pages 73-74 for compatible T8 lamps.

LED T8 Lamp Ready 4' Vapor Tights



MODEL NUMBER	LSV2XT8USE4806	LSV3XT8USE4806
ORDER CODE	74850	74851
Number of Lamps	2 x T8 LED	3 x T8 LED
Voltage	120-277V	120-277V
Max Wattage	22W Per Lamp	22W Per Lamp
LISTINGS	cULus (Damp Listed)	cULus (Damp Listed)

See Pages 73-74 for compatible T8 lamps.

LED T8 Lamp Ready 4' Utility Wraps



MODEL NUMBER	LSU2XT8USE4806	LSU3XT8USE4806	LSU4XT8USE4812
ORDER CODE	75304	75305	14098811
Number of Lamps	2 x T8 LED	3 x T8 LED	4 x T8 LED
Voltage	120-277V	120-277V	120-277V
Max Wattage	22W Per Lamp	22W Per Lamp	22W Per Lamp
LISTINGS	cULus (Damp Listed)	cULus (Damp Listed)	cULus (Damp Listed)

See Pages 73-74 for compatible T8 lamps.

LED T8 Lamp Ready 4' Linear Utility Strips



MODEL NUMBER	LSS1XT8USE4802	LSS2XT8USE4803
ORDER CODE	75302	75303
Number of Lamps	1 x T8 LED	2 x T8 LED
Voltage	120-277V	120-277V
Max Wattage	22W Per Lamp	22W Per Lamp
LISTINGS	cULus (Damp Listed)	cULus (Damp Listed)

See Pages 73-74 for compatible T8 lamps.

LED T8 Lamp Ready 4' Retrofit Strip



MODEL NUMBER	RS-482XT8
ORDER CODE	107768
Number of Lamps	2 x T8 LED
Voltage	120-277V
Max Wattage	22W Per Lamp
LISTINGS	cULus (Damp Listed)

See Pages 73-74 for compatible T8 lamps.

LED T5 Lamp Ready 4' High Bays



MODEL NUMBER	BLHT4XT5USE4810	BLHT6XT5USE4815	RS-BLHT8XT5USE4820
ORDER CODE	14099836	14099837	14099838
Number of Lamps	4 x T5 LED	6 x T5 LED	8 x T5 LED
Voltage	120-277V	120-277V	120-277V
Max Wattage	22W Per Lamp	22W Per Lamp	22W Per Lamp
LISTINGS	cULus (Damp Listed)	cULus (Damp Listed)	cULus (Damp Listed)

See Pages 73-74 for compatible T8 lamps.

LED T5 Lamp Ready 4' Utility Strip



MODEL NUMBER	LSS1XT5USE4802	LSS2XT5USE4803
ORDER CODE	14100561	14100562
Number of Lamps	1 x T5 LED	2 x T5 LED
Voltage	120-277V	120-277V
Max Wattage	22W Per Lamp	22W Per Lamp
LISTINGS	cULus (Damp Listed)	cULus (Damp Listed)

See Pages 74 for compatible T5 lamps.

FlatMAX® LED 2x2 Flat Panels w/ Selectable CCT



CCTs Available:



	2' x 2'	2' x 2'	2' x 2'	2' x 2'
MODEL NUMBER	MLFP22BL18CS	MLFP22BL30CS	MLFP22BL45CS	MLFP22BL3040*
ORDER CODE	14102121	14102122	14102123	103777
Input Wattage	18W	30W	45W	30W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,010/2,030/2,090 lm	3,260/3,330/3,390 lm	4,910/4,990/5,070 lm	3,270 lm
Efficacy (lm/W)	110 lm/W	110 lm/W	110 lm/W	110 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K	4000K
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours	100,000 hours
LISTINGS	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC

Surface mount and flange kits available.
*Fixed CCT model.

FlatMAX® LED 2x4 Flat Panels w/ Selectable CCT



CCTs Available:



	2' x 4'	2' x 4'	2' x 4'	2' x 4'
MODEL NUMBER	MLFP24BL28CS	MLFP24BL40CS	MLFP24BL55CS	MLFP24BL4040*
ORDER CODE	14102124	14102125	14102126	103778
Input Wattage	28W	40W	55W	40W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,080/3,140/3,180 lm	4,350/4,450/4,500 lm	5,950/6,090/6,160 lm	4,510 lm
Efficacy (lm/W)	110 lm/W	110 lm/W	110 lm/W	110 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K	4000K
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours	100,000 hours
LISTINGS	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC

Surface mount and flange kits available.
*Fixed CCT model.

FlatMAX® LED 1x4 Flat Panels w/ Selectable Wattage & CCT - Gen 4



1' x 4'



CCTs Available:



MODEL NUMBER	MLFP14G420WCS		
ORDER CODE	104372		
Input Wattage	20W	25W	30W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,540/2,600/2,590 lm	3,020/3,130/3,080 lm	3,600/3,790/3,700 lm
Efficacy (lm/W)	126/133/126 lm/W	121/130/122 lm/W	118/128/119 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours
LISTINGS	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC


Surface mount and flange kits available.

FlatMAX® LED 2x2 Flat Panels w/ Selectable Wattage & CCT - Gen 4



2' x 2'

2' x 2'

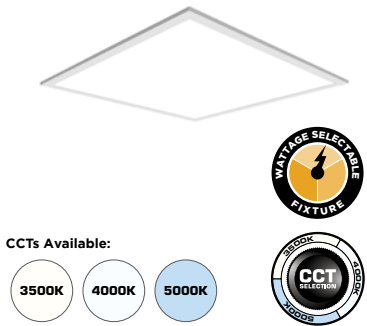

CCTs Available:



MODEL NUMBER	MLFP22G418WCS			MLFP22G43040*
ORDER CODE	104373			104497
Input Wattage	18W	27W	36W	30W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,000/2,040/2,080 lm	2,900/3,040/3,030 lm	3,820/4,000/4,000 lm	3,300 lm
Efficacy (lm/W)	113/119/117 lm/W	110/119/113 lm/W	107/118/112 lm/W	110 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K	4000K
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours	100,000 hours
LISTINGS	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC


Surface mount and flange kits available.
*Fixed CCT model.

FlatMAX® LED 2x4 Flat Panels w/ Selectable Wattage & CCT - Gen 4



2' x 4'

2' x 4'

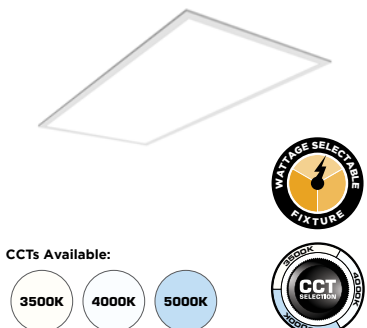

CCTs Available:



MODEL NUMBER	MLFP24G427WCS			MLFP24G44040*
ORDER CODE	104374			104498
Input Wattage	27W	36W	45W	40W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,140/3,260/3,220 lm	4,090/4,030/4,170 lm	4,920/5,200/5,040 lm	4,760 lm
Efficacy (lm/W)	118/126/121 lm/W	114/124/115 lm/W	111/121/111 lm/W	110 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K	4000K
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours	100,000 hours
LISTINGS	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC	cETLus (Damp Listed), FCC, DLC

Surface mount and flange kits available.
*Fixed CCT model.

FlatMAX® LED 1x4 Flat Panels w/ Selectable Wattage & CCT - Gen 4 Controls Ready



1' x 4'

MODEL NUMBER

MLFP14G420WCSCR

ORDER CODE

105184

Input Wattage

20W

25W

30W

Voltage

120-277V

120-277V

120-277V

Delivered Lumens (lm)

2,540/2,600/2,590 lm

3,020/3,130/3,080 lm

3,600/3,790/3,700 lm

Efficacy (lm/W)

126/133/126 lm/W

121/130/122 lm/W

118/128/119 lm/W

Color Rendering Index (CRI)

≥80

≥80

≥80

Color Temperature (CCT)

3500/4000/5000K

3500/4000/5000K

3500/4000/5000K

Dimming Compatible

0-10V

0-10V

0-10V

Lumen Maintenance (L70)

100,000 hours

100,000 hours

100,000 hours

LISTINGS

cETLus (Damp Listed), FCC, DLC

cETLus (Damp Listed), FCC, DLC

cETLus (Damp Listed), FCC, DLC

Surface mount and flange kits available.



CCTs Available:

3500K

4000K

5000K

FlatMAX® LED 2x2 Flat Panels w/ Selectable Wattage & CCT - Gen 4 Controls Ready



2' x 2'

2' x 2'

MODEL NUMBER

MLFP22G418WCSCR

MLFP22G418CSCR*

ORDER CODE

105188

105192

Input Wattage

18W

27W

36W

18W

Voltage

120-277V

120-277V

120-277V

120-277V

Delivered Lumens (lm)

2,000/2,040/2,080 lm

2,900/3,040/3,030 lm

3,820/4,000/4,000 lm

2,000 lm

Efficacy (lm/W)

113/119/117 lm/W

110/119/113 lm/W

107/118/112 lm/W

110 lm/W

Color Rendering Index (CRI)

≥80

≥80

≥80

Color Temperature (CCT)

3500/4000/5000K

3500/4000/5000K

3500/4000/5000K

4000K

Dimming Compatible

0-10V

0-10V

0-10V

0-10V

Lumen Maintenance (L70)

100,000 hours

100,000 hours

100,000 hours

100,000 hours

LISTINGS

cETLus (Damp Listed), FCC, DLC

cETLus (Damp Listed), FCC, DLC

cETLus (Damp Listed), FCC, DLC

cETLus (Damp Listed), FCC, DLC

Surface mount and flange kits available.
*Fixed CCT model.

CCTs Available:

3500K

4000K

5000K

FlatMAX® LED 2x4 Flat Panels w/ Selectable Wattage & CCT - Gen 4 Controls Ready



2' x 4'

2' x 4'

MODEL NUMBER

MLFP24G427WCSCR

MLFP24G428CSCR*

ORDER CODE

105528

105532

Input Wattage

27W

36W

45W

28W

Voltage

120-277V

120-277V

120-277V

120-277V

Delivered Lumens (lm)

3,140/3,260/3,220 lm

4,090/4,030/4,170 lm

4,920/5,200/5,040 lm

3,100 lm

Efficacy (lm/W)

118/126/121 lm/W

114/124/115 lm/W

111/121/111 lm/W

110 lm/W

Color Rendering Index (CRI)

≥80

≥80

≥80

Color Temperature (CCT)

3500/4000/5000K

3500/4000/5000K

3500/4000/5000K

4000K

Dimming Compatible

0-10V

0-10V

0-10V

0-10V

Lumen Maintenance (L70)

100,000 hours

100,000 hours

100,000 hours

100,000 hours

LISTINGS

cETLus (Damp Listed), FCC, DLC

cETLus (Damp Listed), FCC, DLC

cETLus (Damp Listed), FCC, DLC

cETLus (Damp Listed), FCC, DLC

Surface mount and flange kits available.
*Fixed CCT model.

CCTs Available:

3500K

4000K

5000K

ArcMAX™ LED 1x4 Troffer w/ Selectable Wattage & CCT



CCTs Available:



MODEL NUMBER	1' x 4'		
ORDER CODE	MLVT14D16WCS		
	104339		
Input Wattage	16W	20W	30W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,968/2,000/2,000 lm	2,460/2,500/2,500 lm	3,690/3,750/3,750 lm
Efficacy (lm/W)	123/125/125 lm/W	123/125/125 lm/W	123/125/125 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	≥100,000 hours	≥100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

Surface mount and flange kits available.

ArcMAX™ LED 2x2 Troffer w/ Selectable Wattage & CCT



CCTs Available:



MODEL NUMBER	2' x 2'		
ORDER CODE	MLVT22D20WCS		
	104859		
Input Wattage	20W	30W	40W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,460/2,500/2,500 lm	3,690/3,750/3,750 lm	4,920/5,000/5,000 lm
Efficacy (lm/W)	123/125/125 lm/W	123/125/125 lm/W	123/125/125 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	≥100,000 hours	≥100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

Surface mount and flange kits available.

ArcMAX™ LED 2x4 Troffer w/ Selectable Wattage & CCT



CCTs Available:



MODEL NUMBER	2' x 4'		
ORDER CODE	MLVT24D30WCS		
	104867		
Input Wattage	30W	40W	50W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,690/3,750/3,750 lm	4,920/5,000/5,000 lm	6,150/6,250/6,250 lm
Efficacy (lm/W)	123/125/125 lm/W	123/125/125 lm/W	123/125/125 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	≥100,000 hours	≥100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

Surface mount and flange kits available.

ArcMAX™ LED 1x4 Troffer w/ Selectable Wattage & CCT Controls Ready



1' x 4'



CCTs Available:



MODEL NUMBER	MLVT14D16WCSCR		
ORDER CODE	105610		
Input Wattage	16W	20W	30W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,968/2,000/2,000 lm	2,460/2,500/2,500 lm	3,690/3,750/3,750 lm
Efficacy (lm/W)	123/125/125 lm/W	123/125/125 lm/W	123/125/125 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	≥100,000 hours	≥100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

Surface mount and flange kits available.

ArcMAX™ LED 2x2 Troffer w/ Selectable Wattage & CCT Controls Ready



2' x 2'



CCTs Available:



MODEL NUMBER	MLVT22D20WCSCR		
ORDER CODE	105639		
Input Wattage	20W	30W	40W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,460/2,500/2,500 lm	3,690/3,750/3,750 lm	4,920/5,000/5,000 lm
Efficacy (lm/W)	123/125/125 lm/W	123/125/125 lm/W	123/125/125 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	≥100,000 hours	≥100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

Surface mount and flange kits available.

ArcMAX™ LED 2x4 Troffer w/ Selectable Wattage & CCT Controls Ready



2' x 4'



CCTs Available:



MODEL NUMBER	MLVT24D30WCSCR		
ORDER CODE	105647		
Input Wattage	30W	40W	50W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,690/3,750/3,750 lm	4,920/5,000/5,000 lm	6,150/6,250/6,250 lm
Efficacy (lm/W)	123/125/125 lm/W	123/125/125 lm/W	123/125/125 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	≥100,000 hours	≥100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

Surface mount and flange kits available.

LED Lensed Retrofit Kits



CCTs Available:

3500K

4100K

5000K



	2' x 2'	2' x 4'
MODEL NUMBER	LRK22D3041	LRK24D4041
ORDER CODE	107798	75422
Input Wattage	30W	40W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	2,740 lm	4,130 lm
Efficacy (lm/W)	99 lm/W	113 lm/W
Color Rendering Index (CRI)	>80	>80
Color Temperature (CCT)	4100K	4100K
Dimming Compatible	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	cULus, FCC	cULus, FCC

LED Flat Panel Retrofit Kits



CCTs Available:

4000K



	1' x 4'	2' x 2'	2' x 4'
MODEL NUMBER	FPR14EP3040	FPR22EP3040	FPR24EP4040
ORDER CODE	102855	102863	102871
Input Wattage	30W	30W	40W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,003 lm	3,077 lm	4,129 lm
Efficacy (lm/W)	102 lm/W	102 lm/W	102 lm/W
Color Rendering Index (CRI)	>80	>80	>80
Color Temperature (CCT)	4000K	4000K	4000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours
LISTINGS	ETL Classified, DLC, FCC	ETL Classified, DLC, FCC	ETL Classified, DLC, FCC

LED Troffer Retrofit Kits



CCTs Available:

3500K

4000K

5000K



	2' x 2'	2' x 4'
MODEL NUMBER	TRK22D2335	TRK24D3335
ORDER CODE	14098888	14098891
Input Wattage	23W	33W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	2,940 lm	4,300 lm
Efficacy (lm/W)	130 lm/W	132 lm/W
Color Rendering Index (CRI)	>80	>80
Color Temperature (CCT)	3500K	3500K
Replacement	3 Lamp F17T8	3 Lamp F32T8
Dimming Compatible	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium

*Contact MaxLite for lead times.

1x4 Troffer Retrofit Kit w/ Selectable Wattage & CCT Controls Ready



1' x 4'

MODEL NUMBER	TRK14D20WCSCR		
ORDER CODE	104319		
Input Wattage	20W	25W	30W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,620/2,640/2,660 lm	3,250/3,225/3,200 lm	3,810/3,780/3,750 lm
Efficacy (lm/W)	133/132/131 lm/W	130/129/128 lm/W	127/126/125 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	≥100,000 hours	≥100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC

Surface mount and flange kits available.

CCTs Available:



2x2 Troffer Retrofit Kit w/ Selectable Wattage & CCT Controls Ready



2' x 2'

2' x 2'

MODEL NUMBER	TRK22D20WCSCR			TRK22D1840CR*
ORDER CODE	105571			105576
Input Wattage	20W	25W	30W	18W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,660/2,640/2,620 lm	3,250/3,225/3,200 lm	3,810/3,780/3,750 lm	2,471 lm
Efficacy (lm/W)	133/132/131 lm/W	130/129/128 lm/W	127/126/125 lm/W	128 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K	4000K
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	≥100,000 hours	≥100,000 hours	≥100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC	cULus, FCC

Surface mount and flange kits available.
*Fixed CCT model.

CCTs Available:



2x4 Troffer Retrofit Kit w/ Selectable Wattage & CCT Controls Ready



2' x 4'

2' x 4'

MODEL NUMBER	TRK24D25WCSCR			TRK24D2840CR*
ORDER CODE	105573			105578
Input Wattage	25W	30W	45W	28W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,325/3,300/3,275 lm	3,900/3,870/3,840 lm	4,318/4,284/4,250 lm	3,510 lm
Efficacy (lm/W)	133/132/131 lm/W	130/129/128 lm/W	127/126/125 lm/W	126 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	3500/4000/5000K	3500/4000/5000K	3500/4000/5000K	4000K
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	≥100,000 hours	≥100,000 hours	≥100,000 hours	≥100,000 hours
LISTINGS	cULus, FCC	cULus, FCC	cULus, FCC	cULus, FCC

Surface mount and flange kits available.
*Fixed CCT model.

CCTs Available:



LED Emergency Lights



MODEL NUMBER	EML-2HW	EML-2HWHORC
ORDER CODE	14101480	14101481
Voltage	120 or 277V	120 or 277V
Finish	White	White
Mounting	Ceiling or Wall	Ceiling or Wall
Options	n/a	High Output, Remote Capable
LISTINGS	UL924 DL	UL924 DL

LED Remote Heads



MODEL NUMBER	ERI-SW	ERI-2HW	ERO-SW	ERO-2HW
ORDER CODE	14101482	14101483	14101484	14101485
Voltage	LV	LV	LV	LV
Finish	White	White	White	White
Mounting	Ceiling or Wall	Ceiling or Wall	Ceiling or Wall	Ceiling or Wall
Options	Single Head, Indoor	Double Head, Indoor	Single Head, Outdoor	Double Head, Outdoor
LISTINGS	cUL DL	cUL DL	cUL WL	cUL WL

Connect to Remote Capable fixtures

LED Exit Signs



MODEL NUMBER	EX-RW	EX-GW	EX-RWRC	EX-GWRC
ORDER CODE	14101486	14101487	103369	103368
Voltage	120 or 277V	120 or 277V	120 or 277V	120 or 277V
Finish	White	White	White	White
Mounting	Ceiling or Wall	Ceiling or Wall	Ceiling or Wall	Ceiling or Wall
Options	Red Letters	Green Letters	Red Letters, Remote Capable	Red Letters, Remote Capable
LISTINGS	UL924 DL	UL924 DL	UL924 DL	UL924 DL

LED Exit Sign Combos



MODEL NUMBER	EXC-RW	EXC-GW	EXC-RWRC	EXC-GWRC
ORDER CODE	14101488	14101489	103370	103371
Voltage	120 or 277V	120 or 277V	120 or 277V	120 or 277V
Finish	White	White	White	White
Mounting	Ceiling or Wall	Ceiling or Wall	Ceiling or Wall	Ceiling or Wall
Options	Red Letters	Green Letters	Red Letters, Remote Capable	Red Letters, Remote Capable
LISTINGS	UL924 DL	UL924 DL	UL924 DL	UL924 DL

RRC LED Light Engines



Triac dimming models also available.

CCTs Available:



MODEL NUMBER	RRXC10U30Z	RRXC15U30Z	RRXC20U30Z
ORDER CODE	1410046	1410055	1410064
Input Wattage	10W	15W	20W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	900 lm	1,275 lm	1,900 lm
Efficacy (lm/W)	90 lm/W	85 lm/W	95 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3000K	3000K	3000K
Replacement	18W CFL	26W CFL	42W CFL
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	FCC, cULus, ENERGY STAR®	FCC, cULus, ENERGY STAR®	FCC, cULus, ENERGY STAR®
Reflector Options:	RRC4-RFL, RRC6-RFL, RRC8-RFL, RRC9-RFL	RRC4-RFL, RRC6-RFL, RRC8-RFL, RRC9-RFL	RRC6-RFL, RRC8-RFL, RRC9-RFL

Reflectors for RRC Downlight Series



MODEL NUMBER	RRC4-RFL	RRC6-RFL	RRC8-RFL	RRC9-RFL
ORDER CODE	1410090	1410091	1410092	1410093
Size	4"	6"	8"	9"
Reflector Color	Silver	Silver	Silver	Silver

Only pair reflectors with qualified engine wattages.

MODEL NUMBER	RRC4-RFLW	RRC6-RFLW	RRC8-RFLW	RRC9-RFLW
ORDER CODE	14099425	14099426	14099427	14099806
Size	4"	6"	8"	9"
Reflector Color	White	White	White	White

Only pair reflectors with qualified engine wattages.

LED ENGINE	DESCRIPTION	4" (RRC4-RFL)	6" (RRC6-RFL)	8" (RRC8-RFL)	9" (RRC9-RFL)
RRXC10Uyy	RRC LIGHT ENGINE 1000LM 120V, TRIAC DIMMING	X	X	X	X
RRXC10UyyZ	RRC LIGHT ENGINE 1000LM 120-277V, 0-10V DIMMING	X	X	X	X
RRXC12UyyZEM	RRC LIGHT ENGINE 1000LM 120-277V, 0-10V DIMMING W/ BATTERY BACKUP	X	X	X	X
RRXC15Uyy	RRC LIGHT ENGINE 1500LM 120V, TRIAC DIMMING	X	X	X	X
RRXC15UyyZ	RRC LIGHT ENGINE 1500LM 120-277V, 0-10V DIMMING	X	X	X	X
RRXC15UyyZEM	RRC LIGHT ENGINE 1500LM 120-277V, 0-10V DIMMING W/ BATTERY BACKUP	X	X	X	X
RRXC20Uyy	RRC LIGHT ENGINE 2000LM 120V, TRIAC DIMMING		X	X	X
RRXC20UyyZ	RRC LIGHT ENGINE 2000LM 120-277V, 0-10V DIMMING		X	X	X
RRXC20UyyZEM	RRC LIGHT ENGINE 2000LM 120-277V, 0-10V DIMMING W/ BATTERY BACKUP		X	X	X
RRXC30UyyZ	RRC LIGHT ENGINE 3000LM 120-277V, 0-10V DIMMING			X	X
RRXC30UyyZEM	RRC LIGHT ENGINE 3000LM 120-277V, 0-10V DIMMING W/ BATTERY BACKUP			X	X
RRXC50UyyZ	RRC LIGHT ENGINE 5000LM 120-277V, 0-10V DIMMING			X	X

CAUTION: A light engine should only be used with a reflector that is listed as compatible. Any other engine/reflector pairing is not covered by this product's UL Listing, and could be hazardous!
EM models are not ENERGY STAR® certified.

LED Commercial 6" Downlight Retrofits Economical Series



CCTs Available:

3000K

4000K

	6"	6"	6"
MODEL NUMBER	RRECO61230W/V2	RRECO61830W/V2	RRECO62730W/V2
ORDER CODE	1408678	1408679	1408680
Input Wattage	11W	17W	26W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	940 lm	1,334 lm	2,229 lm
Efficacy (lm/W)	88 lm/W	81 lm/W	86 lm/W
Color Rendering Index (CRI)	>80	>80	>80
Color Temperature (CCT)	3000K	3000K	3000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus, FCC, ENERGY STAR®	cULus, FCC, ENERGY STAR®	cULus, FCC, ENERGY STAR®

LED Commercial 8" Downlight Retrofits Economical Series



CCTs Available:

3000K

4000K

	8"	8"	8"	8"
MODEL NUMBER	RRECO81230W/V2	RRECO81830W/V2	RRECO82430W/V2	RRECO84030W/V2
ORDER CODE	1408681	1409589	1408682	1408683
Input Wattage	11W	17W	23W	38W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,030 lm	1,542 lm	2,064 lm	3,254 lm
Efficacy (lm/W)	96 lm/W	93 lm/W	89 lm/W	85 lm/W
Color Rendering Index (CRI)	>80	>80	>80	>80
Color Temperature (CCT)	3000K	3000K	3000K	3000K
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus, FCC, ENERGY STAR®	cULus, FCC, ENERGY STAR®	cULus, FCC, ENERGY STAR®	cULus, FCC, ENERGY STAR®

LED Universal RCF Series Downlights w/ Selectable CCT



CCTs Available:

3000K

3500K

4000K



	4"	6"	6"
MODEL NUMBER	RCF409CSW	RCF613CSW	RCF618CSW
ORDER CODE	14099876	14099877	14099878
Input Wattage	9W	13W	18W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	750 lm	1,100 lm	1,650 lm
Efficacy (lm/W)	87 lm/W	88 lm/W	94 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3000/3500/4000K	3000/3500/4000K	3000/3500/4000K
Dimming Compatible	Triac	Triac	Triac
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	FCC, cETLus, ENERGY STAR®	FCC, cETLus, ENERGY STAR®	FCC, cETLus, ENERGY STAR®

Optional field installable battery back up and new construction recessed frame.

LED Universal RCF Series Downlights w/ Selectable CCT



CCTs Available:



	8"	8"	8"	9.5"
MODEL NUMBER	RCF813CSW	RCF818CSW	RCF822CSW	RCF1040CSW
ORDER CODE	14099879	14099880	14099881	104721
Input Wattage	13W	18W	22W	40W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,115 lm	1,650 lm	2,120 lm	3,500 lm
Efficacy (lm/W)	87 lm/W	94 lm/W	97 lm/W	88 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	3000/3500/4000K	3000/3500/4000K	3000/3500/4000K	3000/3500/4000K
Dimming Compatible	Triac	Triac	Triac	Triac
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	FCC, cETLus, ENERGY STAR®	FCC, cETLus, ENERGY STAR®	FCC, cETLus, ENERGY STAR®	FCC, cETLus, ENERGY STAR®

Optional field installable battery back up and new construction recessed frame.

LED Commercial Downlight w/ Selectable Wattage & CCT Universal RCF Series



CCTs Available:



	4"	6"		
MODEL NUMBER	RCF412CSDW*	RCF610WCSDW		
ORDER CODE	104776	104777		
Input Wattage	12W	10W	12W	17W
Voltage	120-347V	120-347V	120-347V	120-347V
Delivered Lumens (lm)	900 lm	1,000 lm	1,200 lm	1,700 lm
Efficacy (lm/W)	75 lm/W	100 lm/W	100 lm/W	100 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	3000/3500/4000K	3000/3500/4000K	3000/3500/4000K	3000/3500/4000K
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	FCC, cETLus, IC Rated, ENERGY STAR®	FCC, cETLus, IC Rated, ENERGY STAR®	FCC, cETLus, IC Rated, ENERGY STAR®	FCC, cETLus, IC Rated, ENERGY STAR®

Optional field installable battery back up and new construction recessed frame.
*CCT Selectable only.

LED Commercial Downlight w/ Selectable Wattage & CCT Universal RCF Series



CCTs Available:



	8"		
MODEL NUMBER	RCF814WCSDW		
ORDER CODE	104778		
Input Wattage	14W	17W	20W
Voltage	120-347V	120-347V	120-347V
Delivered Lumens (lm)	1,400 lm	1,700 lm	2,000 lm
Efficacy (lm/W)	100 lm/W	100 lm/W	100 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	3000/3500/4000K	3000/3500/4000K	3000/3500/4000K
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	FCC, cETLus, IC Rated, ENERGY STAR®	FCC, cETLus, IC Rated, ENERGY STAR®	FCC, cETLus, IC Rated, ENERGY STAR®

Optional field installable battery back up and new construction recessed frame.

LED Commercial Downlight w/ Selectable Wattage & CCT Universal RCF Series



CCTs Available:



9.5"

MODEL NUMBER

RCF1030WCSDW

ORDER CODE

104779

Input Wattage

30W

35w

40W

Voltage

120-347V

120-347V

120-347V

Delivered Lumens (lm)

2,550 lm

2,975 lm

3,400 lm

Efficacy (lm/W)

100 lm/W

100 lm/W

85 lm/W

Color Rendering Index (CRI)

80

80

80

Color Temperature (CCT)

3000/3500/4000K

3000/3500/4000K

3000/3500/4000K

Dimming Compatible

0-10V

0-10V

0-10V

Lumen Maintenance (L70)

50,000 hours

50,000 hours

50,000 hours

LISTINGS

FCC, cETLus, IC Rated,
ENERGY STAR®FCC, cETLus, IC Rated,
ENERGY STAR®FCC, cETLus, IC Rated,
ENERGY STAR®

Optional field installable battery back up and new construction recessed frame.

LED 120V Residential Retrofit Downlights w/ Selectable CCT



CCTs Available:



4"

5" | 6"

5" | 6"

MODEL NUMBER

RR4089CSW

RR6119CSW

RR6149CSW

ORDER CODE

104750

104751

104752

Input Wattage

8W

10.5W

14W

Voltage

120V

120V

120V

Delivered Lumens (lm)

700 lm

900 lm

1,200 lm

Efficacy (lm/W)

88 lm/W

86 lm/W

86 lm/W

Color Rendering Index (CRI)

90

90

90

Color Temperature (CCT)

2700/3000/3500/4000K

2700/3000/3500/4000K

2700/3000/3500/4000K

Replacement

40W INC

75W INC

100W INC

Dimming Compatible

Triac

Triac

Triac

Lumen Maintenance (L70)

50,000 hours

50,000 hours

50,000 hours

LISTINGS

ENERGY STAR®, Title 24,
cULus, FCCENERGY STAR®, Title 24,
cULus, FCCENERGY STAR®, Title 24,
cULus, FCC

LED 120-277V Residential Retrofit Downlights w/ Selectable CCT



CCTs Available:



4"

6"

MODEL NUMBER

RR410UCSW

RR613UCSW

ORDER CODE

104664

104666

Input Wattage

10W

13W

Voltage

120-277V

120-277V

Delivered Lumens (lm)

650 lm

1,000 lm

Efficacy (lm/W)

65 lm/W

77 lm/W

Color Rendering Index (CRI)

90

90

Color Temperature (CCT)

2700/3000/3500/4000/5000K

2700/3000/3500/4000/5000K

Replacement

40W INC

75W INC

Dimming Compatible

Triac

Triac

Lumen Maintenance (L70)

54,000 hours

54,000 hours

LISTINGS

ENERGY STAR®, Title 24, cETLus,
FCC, IC RatedENERGY STAR®, Title 24, cETLus,
FCC, IC Rated

LED Adjustable Residential Retrofit Downlights w/ Selectable CCT



CCTs Available:



	4"	5" 6"
MODEL NUMBER	RRA4089CSW	RRA6109CSW
ORDER CODE	105670	105652
Input Wattage	8W	10W
Voltage	120V	120V
Delivered Lumens (lm)	700 lm	900 lm
Efficacy (lm/W)	87.5 lm/W	90 lm/W
Color Rendering Index (CRI)	90	90
Color Temperature (CCT)	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K
Replacement	60W INC	75W INC
Dimming Compatible	Triac	Triac
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC	ENERGY STAR®, Title 24, cETLus, FCC

Round Slim Downlights w/ Selectable CCT



CCTs Available:



	4"	6"	8"
MODEL NUMBER	SDLR413CSWJ	SDLR616CSWJ	SDLR820CSWJ
ORDER CODE	102887	102888	102889
Input Wattage	13W	16W	20W
Voltage	120V	120V	120V
Delivered Lumens (lm)	796 lm	1,126 lm	1,520 lm
Efficacy (lm/W)	66 lm/W	71 lm/W	77 lm/W
Color Rendering Index (CRI)	>90	>90	>90
Color Temperature (CCT)	2700/3000/4000/5000K	2700/3000/4000/5000K	2700/3000/4000/5000K
Dimming Compatible	Triac	Triac	Triac
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	FCC, ENERGY STAR®, ETL, T24 JA8	FCC, ENERGY STAR®, ETL, T24 JA8	FCC, ENERGY STAR®, ETL, T24 JA8

Square Slim Downlights w/ Selectable CCT



CCTs Available:



	4"	6"	8"
MODEL NUMBER	SDLS413CSWJ	SDLS616CSWJ	SDLS820CSWJ
ORDER CODE	102890	102891	102892
Input Wattage	13W	16W	20W
Voltage	120V	120V	120V
Delivered Lumens (lm)	836 lm	1,126 lm	1,516 lm
Efficacy (lm/W)	66 lm/W	71 lm/W	76 lm/W
Color Rendering Index (CRI)	>90	>90	>90
Color Temperature (CCT)	2700/3000/4000/5000K	2700/3000/4000/5000K	2700/3000/4000/5000K
Dimming Compatible	Triac	Triac	Triac
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	FCC, ENERGY STAR®, ETL, T24 JA8	FCC, ENERGY STAR®, ETL, T24 JA8	FCC, ENERGY STAR®, ETL, T24 JA8

LED Architectural Wall Sconce



CCTs Available:

3000K



10.5" (BRUSHED NICKEL FINISH)

MODEL NUMBER	ML9LARBN23830
ORDER CODE	1409631
Input Wattage	23W
Voltage	120V
Delivered Lumens (lm)	1,891 lm
Efficacy (lm/W)	83 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	3000K
Replacement	100W
Dimming Compatible	Triac
Lumen Maintenance (L70)	50,000 hours
LISTINGS	cULus (Damp Listed), FCC, ENERGY STAR®

LED Fleming Wall Sconce



CCTs Available:

2700K



12"

MODEL NUMBER	ML9LAFBN09827
ORDER CODE	14099634
Input Wattage	9W
Voltage	120V
Delivered Lumens (lm)	690 lm
Efficacy (lm/W)	71 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K
Replacement	40W INC
Dimming Compatible	Triac
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ENERGY STAR®, cETLus, FCC

LED Wall Sconce



CCTs Available:

2700K



13.375" x 7.875" (BRUSHED NICKEL FINISH)

16.5" x 9.8" (BRUSHED NICKEL FINISH)

MODEL NUMBER	ML9LA17LCNBNI927	ML9LA23LCNBNI927
ORDER CODE	77655	77656
Input Wattage	17W	24W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	1,550 lm	2,075 lm
Efficacy (lm/W)	88 lm/W	85 lm/W
Color Rendering Index (CRI)	≥90	≥90
Color Temperature (CCT)	2700K	2700K
Replacement	75W	125W
Dimming Compatible	Triac	Triac
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	cULus (Damp Listed), FCC, ENERGY STAR®	cULus (Damp Listed), FCC, ENERGY STAR®

LED Architectural Vanity Bar



25" (BRUSHED NICKEL FINISH)



CCTs Available:

3000K

MODEL NUMBER	ML8LARBN30830
ORDER CODE	1410172
Input Wattage	30W
Voltage	120V
Delivered Lumens (lm)	2,100 lm
Efficacy (lm/W)	70 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	3000K
Replacement	100W INC
Dimming Compatible	Triac
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ETL, FCC, ENERGY STAR®

LED Fleming Vanity Bar



24"



CCTs Available:

2700K

MODEL NUMBER	ML8LAFBN23827
ORDER CODE	14099635
Input Wattage	23W
Voltage	120V
Delivered Lumens (lm)	1,385 lm
Efficacy (lm/W)	65 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K
Replacement	75W INC
Dimming Compatible	Triac
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ENERGY STAR®, cETLus, FCC

LED Tulip Vanity Bar



24"



CCTs Available:

3000K

MODEL NUMBER	ML8LATUN30930
ORDER CODE	102822
Input Wattage	30W
Voltage	120V
Delivered Lumens (lm)	2,315 lm
Efficacy (lm/W)	85 lm/W
Color Rendering Index (CRI)	90
Color Temperature (CCT)	3000K
Replacement	3 x 60W INC
Dimming Compatible	Triac
Lumen Maintenance (L70)	25,000 hours
LISTINGS	ENERGY STAR®, cETLus, FCC

LED Flush Mounts - Traditional Series



CCTs Available:

3000K

	15" (WHITE FINISH)
MODEL NUMBER	ML2LALTRWH24830
ORDER CODE	1409609
Input Wattage	24W
Voltage	120V
Delivered Lumens (lm)	1,680 lm
Efficacy (lm/W)	68 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	3000K
Replacement	100W INC
Dimming Compatible	Triac
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ENERGY STAR®, ETL, FCC

LED Flush Mounts - Architectural Series w/ Selectable CCT



CCTs Available:

2700K

3000K

3500K

4000K

5000K

	12" (BRUSHED NICKEL FINISH)	14" (BRUSHED NICKEL FINISH)	16" (BRUSHED NICKEL FINISH)
MODEL NUMBER	ML2LASABN169CS	ML2LAMABN209CS	ML2LALABN249CS
ORDER CODE	103943	103944	103945
Input Wattage	16W	20W	25W
Voltage	120V	120V	120V
Delivered Lumens (lm)	1,000 lm	1,400 lm	1,600 lm
Efficacy (lm/W)	62.5 lm/W	70 lm/W	64 lm/W
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K
Replacement	75W INC	100W INC	150W INC
Dimming Compatible	Triac	Triac	Triac
Lumen Maintenance (L70)	54,000 hours	54,000 hours	54,000 hours
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC	ENERGY STAR®, Title 24, cETLus, FCC	ENERGY STAR®, Title 24, cETLus, FCC

LED Flush Mounts - Architectural Series w/ Selectable CCT



CCTs Available:

2700K

3000K

3500K

4000K

5000K

	12" (BRUSHED NICKEL FINISH)	14" (BRUSHED NICKEL FINISH)	16" (BRUSHED NICKEL FINISH)
MODEL NUMBER	ML2LASABNU169CS	ML2LAMABNU209CS	ML2LALABNU249CS
ORDER CODE	103946	103947	103949
Input Wattage	16W	20W	24W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,200 lm	1,500 lm	1,900 lm
Efficacy (lm/W)	75 lm/W	75 lm/W	79 lm/W
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K
Replacement	100W INC	125W INC	150W INC
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	54,000 hours	54,000 hours	54,000 hours
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC	ENERGY STAR®, Title 24, cETLus, FCC	ENERGY STAR®, Title 24, cETLus, FCC

Field programmable bi-level motion sensor and Battery back up optional.

LED Flush Mounts - Puff Series w/ Selectable CCT



CCTs Available:



	11" (WHITE)	13" (WHITE)	15" (WHITE)
MODEL NUMBER	ML2LASPWH169CS	ML2LAMPWH209CS	ML2LALPWH249CS
ORDER CODE	103950	104651	104652
Input Wattage	16W	20W	25W
Voltage	120V	120V	120V
Delivered Lumens (lm)	1,100 lm	1,400 lm	1,700 lm
Efficacy (lm/W)	69 lm/W	70 lm/W	68 lm/W
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K
Replacement	75W INC	100W INC	150W INC
Dimming Compatible	Triac	Triac	Triac
Lumen Maintenance (L70)	54,000 hours	54,000 hours	54,000 hours
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC	ENERGY STAR®, Title 24, cETLus, FCC	ENERGY STAR®, Title 24, cETLus, FCC

LED Flush Mounts - Puff Series w/ Selectable CCT



CCTs Available:



	11" (WHITE)	13" (WHITE)	15" (WHITE)
MODEL NUMBER	ML2LASPWHU169CS	ML2LAMPWHU209CS	ML2LALPWHU249CS
ORDER CODE	103953	103954	103955
Input Wattage	16W	20W	24W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,300 lm	1,500 lm	2,000 lm
Efficacy (lm/W)	81 lm/W	80 lm/W	83 lm/W
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K
Replacement	100W INC	125W INC	150W INC
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	54,000 hours	54,000 hours	54,000 hours
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC	ENERGY STAR®, Title 24, cETLus, FCC	ENERGY STAR®, Title 24, cETLus, FCC

Field programmable bi-level motion sensor and Battery back up optional.

LED Flush Mounts - Slim Series



CCTs Available:



	11" (BRUSHED NICKEL FINISH)	13" (BRUSHED NICKEL FINISH)	15" (BRUSHED NICKEL FINISH)
MODEL NUMBER	ML2L11SLNI1230	ML2L13SLNI1530	ML2L15SLNI2430
ORDER CODE	1410130	1410132	1410134
Input Wattage	12W	15W	24W
Voltage	120V	120V	120V
Delivered Lumens (lm)	845 lm	1,050	1,680
Efficacy (lm/W)	70 lm/W	70 lm/W	70 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	3000K	3000K	3000K
Replacement	60W INC	60W INC	100W INC
Dimming Compatible	Triac	Triac	Triac
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus, FCC, ENERGY STAR®	cULus, FCC, ENERGY STAR®	cULus, FCC, ENERGY STAR®

White finish also available.

LED Flush Mounts - Fleming Series w/ Selectable CCT



	5" (WHITE FINISH)	7" (WHITE FINISH)	12" (WHITE FINISH)	12" (WHITE FINISH)
MODEL NUMBER	ML2LA05SWH129CSMSV	ML2LA07SWH139CSMSV	ML2LA12SWH189CSMSV	ML2LA12SWH239CSMSV
ORDER CODE	104908	104909	104910	104911
Input Wattage	12W	12.5W	18W	23W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	735 lm	1,090 lm	1,520 lm	1,950 lm
Efficacy (lm/W)	61.25 lm/W	87 lm/W	84.5 lm/W	85 lm/W
Color Rendering Index (CRI)	≥90	≥90	≥90	≥90
Color Temperature (CCT)	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K	2700/3000/3500/4000/5000K
Replacement	60W INC	75W INC	125W INC	150W INC
Dimming Compatible	Triac	Triac	Triac	Triac
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cETLus, FCC	cETLus, FCC	cETLus, FCC	cETLus, FCC

Listed as a fixture and a retrofit. Bilevel motion sensor, E26 base and friction clips (5") or torsion springs (7", 12") included.

LED Light Engines/ Retrofit Kits



CCTs Available:



	3"	4"	5.5"	7"
MODEL NUMBER	FRK10X3-930/V3	FRK17X4-930/V3	FRK23X5.5-930/V3	FRK28X7-930/V3
ORDER CODE	102614	14099917	14099920	14099923
Input Wattage	10W	16W	23W	28W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	800 lm	1,200 lm	1,750 lm	2,240 lm
Efficacy (lm/W)	77	74	75	80
Color Rendering Index (CRI)	≥90	≥90	≥90	≥90
Color Temperature (CCT)	3000K	3000K	3000K	3000K
Replacement	60W INC	75W INC	100W INC	125W INC
Dimming Compatible	Triac	Triac	Triac	Triac
Lumen Maintenance (L70)	40,000 hours	40,000 hours	40,000 hours	40,000 hours
LISTINGS	cULs Classified, FCC, ENERGY STAR®	cULs Classified, FCC, ENERGY STAR®	cULs Classified, FCC, ENERGY STAR®	cULs Classified, FCC, ENERGY STAR®

LED Disc Light w/ Selectable CCT



CCTs Available:



	6"	7"
MODEL NUMBER	DL6079CSWH	DL7119CSWH
ORDER CODE	103864	103873
Input Wattage	7W	11W
Voltage	120V	120V
Delivered Lumens (lm)	650 lm	1,000 lm
Efficacy (lm/W)	97 lm/W	95 lm/W
Color Rendering Index (CRI)	90	90
Color Temperature (CCT)	2700/3000/4000/5000K	2700/3000/4000/5000K
Replacement	40W INC	75W INC
Dimming Compatible	Triac	Triac
Lumen Maintenance (L70)	50000	50000
LISTINGS	ENERGY STAR®, JA8, Title 24, Title 20, cETLus, FCC	ENERGY STAR®, JA8, Title 24, Title 20, cETLus, FCC

Listed as a fixture and a retrofit. E26 screw-base connector included.

Bulb in Box - Traditional Ceiling Fixture



Finishes Available:



13" (WHITE FINISH)

13" (BRUSHED NICKEL FINISH)

MODEL NUMBER	ML2E242TRWH27-V2	ML2E242TRNI27-V2
ORDER CODE	1408623	1408622
Number of Lamps	2 x 12W 2700K JA8 COMPLIANT E26 SOCKET LED LAMP	2 x 12W 2700K JA8 COMPLIANT E26 SOCKET LED LAMP
Voltage	120V	120V
Source Lumens (lm)	2,200 lm	2,200 lm
Source Color Rendering Index (CRI)	90	≥90
Max Wattage	24W	24W
LISTINGS	JA8 Bulb, ENERGY STAR®, TITLE 24, cETLus, FCC	JA8 Bulb, ENERGY STAR®, TITLE 24, cETLus, FCC

Bulb in Box - Tulip Vanity Bar



Finishes Available:



NICKEL FINISH

MODEL NUMBER	ML8E303TUNI27
ORDER CODE	1408625
Number of Lamps	3 x 10W 2700K JA8 COMPLIANT E26 SOCKET LED LAMP
Voltage	120V
Source Lumens (lm)	2,400 lm
Source Color Rendering Index (CRI)	≥90
Max Wattage	30W
LISTINGS	JA8 Bulb, cULus, FCC, ENERGY STAR®

Bulb in Box - Architectural Torchiera



Finishes Available:



BLACK FINISH

MODEL NUMBER	ML1E242DARBK27-V2
ORDER CODE	1410154
Number of Lamps	2 x 12W 2700K JA8 COMPLIANT E26 SOCKET LED LAMP
Voltage	120V
Source Lumens (lm)	2,200 lm
Source Color Rendering Index (CRI)	≥90
Max Wattage	24W
LISTINGS	JA8 Bulb, ENERGY STAR®, ETL, FCC

Bulb in Box - Contemporary Wall Sconce



Finishes Available:



NICKEL FINISH

MODEL NUMBER	ML9E101CCNI27
ORDER CODE	1408633
Number of Lamps	1 x 10W 2700K JA8 COMPLIANT E26 SOCKET LED LAMP
Voltage	120V
Source Lumens (lm)	800 lm
Source Color Rendering Index (CRI)	≥90
Max Wattage	10W
LISTINGS	JA8 Bulb, cULus, FCC, ENERGY STAR®

Bulb in Box - Ranch Outdoor Lantern



CCTs Available:

2700K



W/ PHOTOCELL AND PHOTOCELL COVER CAP

W/ PHOTOCELL AND DHL MOTION SENSOR

MODEL NUMBER	ML4LE109SPLBK2	ML4LE171RLBK27MSC-V3
ORDER CODE	101309	1408640
Number of Lamps	1 x 9W 2700K E26 SOCKET LED LAMP	1 x 17W 2700K JA8 COMPLIANT E26 SOCKET LED LAMP
Voltage	120V	120V
Source Lumens (lm)	800 lm	1,600 lm
Housing	Die Casting	Formed Steel
Lens	Frosted Glass	Glass
Max Wattage	9W	17W
LISTINGS	ENERGY STAR®, cETLus, FCC	ENERGY STAR®, cETLus, FCC, JA8

Bulb in Box - Pagoda Outdoor Lantern



CCTs Available:

2700K



W/ PHOTOCELL AND PHOTOCELL COVER CAP

MODEL NUMBER	ML4E121PLBK27
ORDER CODE	101077
Number of Lamps	1 x 12W 2700K JA8 COMPLIANT E26 SOCKET LED LAMP
Voltage	120V
Source Lumens (lm)	1,100 lm
Housing	Die Casting
Lens	Plastic
Max Wattage	12W
LISTINGS	ENERGY STAR®, cULus, FCC, JA8

LED Coach Lantern



CCTs Available:

2700K



W/ PHOTOCELL AND PHOTOCELL COVER CAP

MODEL NUMBER	ML4LS10MCLBK827
ORDER CODE	97868
Input Wattage	10W
Voltage	120V
Delivered Lumens (lm)	500 lm
Efficacy (lm/W)	50 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K
Replacement	25W INC
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ENERGY STAR®, cULus, FCC

LED Ranch Lantern



CCTs Available:

2700K

W/ PHOTOCELL AND PHOTOCELL COVER CAP

MODEL NUMBER	ML4LS12SRLBK827
ORDER CODE	96974
Input Wattage	12W
Voltage	120V
Delivered Lumens (lm)	750 lm
Efficacy (lm/W)	62.5 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K
Replacement	60W INC
Lumen Maintenance (L70)	50,000 hours
LISTINGS	cULus, FCC, ENERGY STAR*

LED Mission Lantern



CCTs Available:

2700K

W/ PHOTOCELL AND PHOTOCELL COVER CAP

MODEL NUMBER	ML4LASMSB14827PC
ORDER CODE	1408707
Input Wattage	14W
Voltage	120V
Delivered Lumens (lm)	815 lm
Efficacy (lm/W)	58 lm/W
Color Rendering Index (CRI)	>80
Color Temperature (CCT)	2700K
Replacement	60W INC
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ETL, FCC, ENERGY STAR*

LED Traditional Lantern



CCTs Available:

2700K

W/ PHOTOCELL AND PHOTOCELL COVER CAP

MODEL NUMBER	ML4LS14SOLBPC
ORDER CODE	101444
Input Wattage	13.5W
Voltage	120V
Delivered Lumens (lm)	1,165 lm
Efficacy (lm/W)	86 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K
Replacement	100W INC
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ENERGY STAR*, cETLus, FCC

MPulse™

Bollards



CCTs Available:



MODEL NUMBER	MP-BL25UT5-840B	MP-BL25UT5-850B
ORDER CODE	102523	102525
Input Wattage	25W	25W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	1,603 lm	1,606 lm
Efficacy (lm/W)	68 lm/W	68 lm/W
Color Rendering Index (CRI)	80	80
Optic Distribution	Visual Comfort	Visual Comfort
Color Temperature (CCT)	4000K	5000K
Replacement	70W MH	70W MH
Dimming Compatible	0-10V	0-10V
Lumen Maintenance (L80)	>100,000 hours	>100,000 hours
LISTINGS	IP66, cULus	IP66, cULus

Available with glare shield accessory.

MPulse™

Flood Lights



Photo/motion sensor, 120V-277V button photocontrol and 347-480V options available. Narrow, Medium, Rectangular and Visual Comfort (VC) optics available.

CCTs Available:



MODEL NUMBER	MP-FL28UW-40BTS	MP-FL28UW-50BTS	MP-FL55UW-40BTS	MP-FL55UW-50BTS
ORDER CODE	101261	101272	101274	101276
Input Wattage	28W	28W	55W	55W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,200 lm	3,200 lm	6,700 lm	6,700 lm
Efficacy (lm/W)	115 lm/W	115 lm/W	123 lm/W	123 lm/W
Color Rendering Index (CRI)	>70	>70	>70	>70
Color Temperature (CCT)	4000K	5000K	4000K	5000K
Beam Spread	Wide	Wide	Wide	Wide
Replacement	100W PSMH	100W PSMH	150W PSMH	150W PSMH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L90)	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
Mounting	Trunnion w/ Threaded Nipple	Trunnion w/ Threaded Nipple	Trunnion w/ Threaded Nipple	Trunnion w/ Threaded Nipple
LISTINGS	cULus, DLC Premium	cULus, DLC Premium	cULus, DLC Premium	cULus, DLC Premium

MPulse™

Flood Lights



Photo/motion sensor, NEMA twist lock photocontrol receptacle and 347V-480V options available. Narrow, Medium, and Rectangular optics available.

CCTs Available:



MODEL NUMBER	MP-FL100UW-50BTS	MP-FL100UW-50BSK	MP-FL130UW-50BTS	MP-FL130UW-50BSK
ORDER CODE	101546	101786	101240	101248
Input Wattage	100W	100W	130W	130W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	12,800 lm	12,800 lm	15,200 lm	15,200 lm
Efficacy (lm/W)	128 lm/W	128 lm/W	122 lm/W	122 lm/W
Color Rendering Index (CRI)	>70	>70	>70	>70
Color Temperature (CCT)	5000K	5000K	5000K	5000K
Beam Spread	Wide	Wide	Wide	Wide
Replacement	250W PSMH	250W PSMH	400W PSMH	400W PSMH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L90)	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
Mounting	Trunnion	Slipfitter Knuckle	Trunnion	Slipfitter Knuckle
LISTINGS	cULus, DLC Premium	cULus, DLC Premium	cULus, DLC Premium	cULus, DLC Premium

MPulse™

Wall Mount Luminaire



CCTs Available:



MODEL NUMBER	MP-SM28UT4-50B	MP-SM55UT4-50B	MP-SM100UT4-50B
ORDER CODE	1409471	1409473	1408979
Input Wattage	28W	55W	100W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,230 lm	6,250 lm	11,730 lm
Efficacy (lm/W)	115 lm/W	114 lm/W	123 lm/W
Color Rendering Index (CRI)	>70	>70	>70
Optic Distribution	Type IV	Type IV	Type IV
Color Temperature (CCT)	5000K	5000K	5000K
Replacement	175W MH	250W MH	400W MH
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L90)	>100,000 hours	>100,000 hours	>100,000 hours
LISTINGS	cULus, DLC Premium, IP66	cULus, DLC Premium, IP66	cULus, DLC Premium, IP66

Type III, IV and Visual Comfort (VC) optics available. Fixture adjustable to 15°, 30° or 45° tilts. Motion sensor, photocell and emergency battery backup options available. 347-480V available.

MPulse™

Canopy Series



CCTs Available:



MODEL NUMBER	MP-CP28UC-50B	MP-CP55UC-50B
ORDER CODE	100546	14098923
Input Wattage	28W	55W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	3,945 lm	6,920 lm
Efficacy (lm/W)	147 lm/W	122 lm/W
Color Rendering Index (CRI)	>70	>70
Color Temperature (CCT)	5000K	5000K
Replacement	150W MH	250W MH
Dimming Compatible	0-10V	0-10V
Lumen Maintenance (L90)	>100,000 hours	>100,000 hours
LISTINGS	cULus, DLC Premium	cULus, DLC Premium

Canopy, parking garage, asymmetric and Visual Comfort (VC) distributions available. 120-277V, 347V-480V, motion sensor, photocell and emergency battery backup options available.

MPulse™

Area Light



CCTs Available:



MODEL NUMBER	MP-AR100UT3-50B	MP-AR150UT3-50B	MP-AR200UT3-50B	MP-AR250UT3-50B	MP-AR300UT3-50B
ORDER CODE	1409997	14098824	1409999	14098825	1409995
Input Wattage	100W	150W	200W	250W	300W
Voltage	120-277V	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	11,975 lm	19,450 lm	25,335 lm	31,525 lm	36,440 lm
Efficacy (lm/W)	>120 lm/W	>120 lm/W	>120 lm/W	>120 lm/W	>120 lm/W
Color Rendering Index (CRI)	>70	>70	>70	>70	>70
Color Temperature (CCT)	5000K	5000K	5000K	5000K	5000K
Replacement	250W MH	320W PSMH	400W MH	400W PSMH	750W PSMH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
LISTINGS	cULus, DLC Premium	cULus, DLC Premium	cULus, DLC Premium	cULus, DLC Premium	cULus, DLC Premium

Photo/motion sensor, photocontrol receptacle and 347-480V options available. Type II, III, IV and V optics available. Arm, Knuckle Slipfitter, Trunnion and Wall Mounts available.

MPulse™

High Output Flood Lights



Silver finish, high voltage (347-480V), Slipfitter mounting option, 3-Pin and 7-Pin photocontrol receptacles optional.

CCTs Available:



MODEL NUMBER	MP-HO220UM-50BTS	MP-HO220UN-50BTS	MP-HO220UR-50BTS	MP-HO220UW-50BTS
ORDER CODE	14100812	14100816	14100820	14100824
Input Wattage	220W	220W	220W	220W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	27,856 lm	29,075 lm	27,910 lm	27,383 lm
Efficacy (lm/W)	127 lm/W	133 lm/W	128 lm/W	126 lm/W
Color Rendering Index (CRI)	70	70	70	70
Color Temperature (CCT)	5000K	5000K	5000K	5000K
Beam Spread	Medium	Narrow	Rectangular	Wide
Replacement	400W MH	400W MH	400W MH	400W MH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L90)	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
Mounting	Trunnion	Trunnion	Trunnion	Trunnion
LISTINGS	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium

MPulse™

High Output Flood Lights



Silver finish, high voltage (347-480V), Slipfitter mounting option, 3-Pin and 7-Pin photocontrol receptacles optional.

CCTs Available:



MODEL NUMBER	MP-HO440UM-50BTS	MP-HO440UN-50BTS	MP-HO440UR-50BTS	MP-HO440UW-50BTS
ORDER CODE	14100844	14100848	14100852	14100856
Input Wattage	440W	440W	440W	440W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	55,021 lm	57,430 lm	55,127 lm	54,086 lm
Efficacy (lm/W)	126 lm/W	131 lm/W	126 lm/W	124 lm/W
Color Rendering Index (CRI)	70	70	70	70
Color Temperature (CCT)	5000K	5000K	5000K	5000K
Beam Spread	Medium	Narrow	Rectangular	Wide
Replacement	1,000W MH	1,000W MH	1,000W MH	1,000W MH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L90)	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
Mounting	Trunnion	Trunnion	Trunnion	Trunnion
LISTINGS	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium

MPulse™

High Output Flood Lights



Silver finish, high voltage (347-480V), Slipfitter mounting option, 3-Pin and 7-Pin photocontrol receptacles optional.

CCTs Available:



MODEL NUMBER	MP-HO660UM-50BTS	MP-HO660UN-50BTS	MP-HO660UR-50BTS	MP-HO660UW-50BTS
ORDER CODE	14100876	14100880	14100884	14100888
Input Wattage	660W	660W	660W	660W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	81,830 lm	85,413 lm	81,989 lm	80,441 lm
Efficacy (lm/W)	126 lm/W	132 lm/W	127 lm/W	125 lm/W
Color Rendering Index (CRI)	70	70	70	70
Color Temperature (CCT)	5000K	5000K	5000K	5000K
Beam Spread	Medium	Narrow	Rectangular	Wide
Replacement	1,500W MH	1,500W MH	1,500W MH	1,500W MH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L90)	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
Mounting	Trunnion	Trunnion	Trunnion	Trunnion
LISTINGS	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium	cULus, FCC, DLC Premium

FieldMax™ High Output Flood Lights



Threaded bolt available standard with the fixture.
High voltage (347-480V) and glare visor optional.

CCTs Available:



MODEL NUMBER	FL-SR360U3357BYK	FL-SR360U5557BYK	FL-SR360U7757BYK
ORDER CODE	103715	103716	103717
Input Wattage	360W	360W	360W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	65,002 lm	63,314 lm	61,121 lm
Efficacy (lm/W)	180 lm/W	175 lm/W	170 lm/W
Color Rendering Index (CRI)	77	77	77
Color Temperature (CCT)	5700K	5700K	5700K
Beam Type	NEMA 3X3	NEMA 5X5	NEMA 7X7
Replacement	750W MH	750W MH	750W MH
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	>50,000 hours	>50,000 hours	>50,000 hours
Mounting	Yoke Bracket	Yoke Bracket	Yoke Bracket
LISTINGS	IP65, cULus, DLC Premium	IP65, cULus, DLC Premium	IP65, cULus, DLC Premium

FieldMax™ High Output Flood Lights



Threaded bolt available standard with the fixture.
High voltage (347-480V) and glare visor optional.

CCTs Available:



MODEL NUMBER	FL-SR430U3357BYK	FL-SR430U5557BYK	FL-SR430U7757BYK
ORDER CODE	103718	103719	103720
Input Wattage	435W	435W	435W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	76,439 lm	74,570 lm	72,000 lm
Efficacy (lm/W)	177 lm/W	172 lm/W	167 lm/W
Color Rendering Index (CRI)	77	77	77
Color Temperature (CCT)	5700K	5700K	5700K
Beam Type	NEMA 3X3	NEMA 5X5	NEMA 7X7
Replacement	1,000W MH	1,000W MH	1,000W MH
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	>50,000 hours	>50,000 hours	>50,000 hours
Mounting	Yoke Bracket	Yoke Bracket	Yoke Bracket
LISTINGS	IP65, cULus, DLC Premium	IP65, cULus, DLC Premium	IP65, cULus, DLC Premium

FieldMax™ High Output Flood Lights



Threaded bolt available standard with the fixture.
High voltage (347-480V) and glare visor optional.

CCTs Available:



MODEL NUMBER	FL-SR515U3357BYK	FL-SR515U5557BYK	FL-SR515U7757BYK
ORDER CODE	103645	103644	103647
Input Wattage	515W	515W	515W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	90,853 lm	88,623 lm	87,005 lm
Efficacy (lm/W)	178 lm/W	173 lm/W	170 lm/W
Color Rendering Index (CRI)	77	77	77
Color Temperature (CCT)	5700K	5700K	5700K
Beam Type	NEMA 3X3	NEMA 5X5	NEMA 7X7
Replacement	15,000W MH	15,000W MH	15,000W MH
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	>50,000 hours	>50,000 hours	>50,000 hours
Mounting	Yoke Bracket	Yoke Bracket	Yoke Bracket
LISTINGS	IP65, cULus, DLC Premium	IP65, cULus, DLC Premium	IP65, cULus, DLC Premium

QuadroMAX® Plus Modular Lighting Fixtures



CCTs Available:

5000K

MODEL NUMBER	QMP-100UT5-50B	QMP-250UT5-50B	QMP-300UT5-50B
ORDER CODE	1408857	1408833	1408841
Input Wattage	100W	250W	300W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	12,275 lm	33,485 lm	39,505 lm
Efficacy (lm/W)	up to 131 lm/W	up to 131 lm/W	up to 131 lm/W
Color Rendering Index (CRI)	>70	>70	>70
Color Temperature (CCT)	5000K	5000K	5000K
Replacement	250W MH	400W PSMH	750W PSMH
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L90)	>100,000 hours	>100,000 hours	>100,000 hours
LISTINGS	IP66, cULus, DLC Premium	IP66, cULus, DLC Premium	IP66, cULus, DLC Premium

Type II, III, IV, V optics available. 347-480V available. 10kV surge suppression standard.

LED Slim Area Lights



CCTs Available:

4000K

5000K

MODEL NUMBER	AR60UT3-50BA	AR100UT3-50BA	AR140UT3-50BA	AR210UT3-50BA	AR280UT3-50BA
ORDER CODE	14099279	14099303	14099327	14099351	14099375
Input Wattage	60W	100W	140W	210W	280W
Voltage	120-277V	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	7,900 lm	12,355 lm	17,250 lm	25,810 lm	34,370 lm
Efficacy (lm/W)	Up to 130 lm/W	Up to 130 lm/W	Up to 130 lm/W	Up to 130 lm/W	Up to 130 lm/W
Color Rendering Index (CRI)	>70	>70	>70	>70	>70
Color Temperature (CCT)	5000K	5000K	5000K	5000K	5000K
Replacement	150W PSMH	250W PSMH	400MH	400W PSMH	750W PSMH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
Mounting	Straight Arm	Straight Arm	Straight Arm	Straight Arm	Straight Arm
LISTINGS	cULus, DLC Premium	cULus, DLC Premium	cULus, DLC Premium	cULus, DLC Premium	cULus, DLC Premium

Type II, III, IV, V optics; 347-480V, photocontrol receptacle and photo/motion sensor options available. Straight arm, trunnion swivel, and slipfitter knuckle mountings available. *Contact MaxLite for lead times.

LED Slim Flood Lights



CCTs Available:

3000K

4000K

5000K




MODEL NUMBER	MSF15UW-50BKT	MSF29UW-50BKT	MSF50UW-50BKT	MSF70UW-CSBYRPC	MSF90UW-CSBSKRPC
ORDER CODE	104186	104190	104193	104196	104197
Input Wattage	15W	29W	50W	70W	90W
Voltage	120-277V	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,600 lm	3,400 lm	6,000 lm	9,000 lm	13,000 lm
Efficacy (lm/W)	114 lm/W	115 lm/W	118 lm/W	120 lm/W	125 lm/W
Color Rendering Index (CRI)	≥83	≥84	≥83	≥82	≥82
Color Temperature (CCT)	5000K	5000K	5000K	3000/4000/5000K	3000/4000/5000K
Beam Spread	Wide	Wide	Wide	Wide	Wide
Replacement	70W MH	100W MH	150W MH	175W MH	250W MH
Lumen Maintenance (L70)	>100,000 hrs	>100,000 hrs	>100,000 hrs	>100,000 hrs	>100,000 hrs
Mounting	1/2" Threaded Knuckle	1/2" Threaded Knuckle	1/2" Threaded Knuckle	Yoke	Slip Fitter
LISTINGS	cULus, DLC, 1.5G, FCC	cULus, DLC, 1.5G, FCC	cULus, DLC, 1.5G, FCC	cULus, DLC, 1.5G, FCC	cULus, DLC, 1.5G, FCC

70/90W CCT Selectable (3/4/5K) and include 3pin twist lock receptacle with shorting cap. Narrow lens available in 50W, Yoke and Slipfitter mounts available.

LED Bullet Flood Lights - Gen B



CCTs Available:



MODEL NUMBER	BF12BUW30B	BF12BUW50B	BF30BUW30B	BF30BUW50B
ORDER CODE	104080	104084	104085	104087
Input Wattage	11.5W	11.5W	28W	28W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,400 lm	1,400 lm	3,600 lm	3,600 lm
Efficacy (lm/W)	122 lm/W	122 lm/W	130 lm/W	130 lm/W
Color Rendering Index (CRI)	≥72	≥72	≥72	≥72
Color Temperature (CCT)	3000K	5000K	3000K	5000K
Beam Angle	Wide	Wide	Wide	Wide
Replacement	35W MH	35W MH	150W MH	150W MH
Lumen Maintenance (L70)	>100,000 hrs	>100,000 hrs	>100,000 hrs	>100,000 hrs
Mounting	1/2" Threaded Knuckle	1/2" Threaded Knuckle	1/2" Threaded Knuckle	1/2" Threaded Knuckle
LISTINGS	cULus, DLC, IP65, FCC	cULus, DLC, IP65, FCC	cULus, DLC, IP65, FCC	cULus, DLC, IP65, FCC

Narrow lens and shroud available as field installable accessories.
Slip Fitter, ground stake and flat surface mount accessories also available.

FloodMax™ LED Flood Lights



20W & 30W



50W & 80W

CCTs Available:



120V-277V button photocell included with removable cap, Narrow optics and visors available. Multiple mounting options available.

MODEL NUMBER	FMS20UW-40BKTPC	FMS30UW-50BKTPC	FMM50UW-50BTSPC	FMM80UW-40BKTPC
ORDER CODE	14100143	14100146	102801	14100149
Input Wattage	20W	29W	53W	75W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,600 lm	3,900 lm	6,900 lm	9,900 lm
Efficacy (lm/W)	130 lm/W	130 lm/W	130 lm/W	132 lm/W
Color Rendering Index (CRI)	>70	>70	>70	>70
Beam Spread	Wide (7x7)	Wide (7x7)	Wide (6x6)	Wide (6x6)
Color Temperature (CCT)	4000K	5000K	5000K	4000K
Replacement	70W MH	100W MH	175W MH	250W MH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours	100,000 hours
Mounting	Knuckle 1/2" Thread	Knuckle 1/2" Thread	Trunnion	Knuckle 1/2" Thread
LISTINGS	cULus, IP65, DLC Premium	cULus, IP65, DLC Premium	cULus, IP65, DLC Premium	cULus, IP65, DLC Premium

FloodMax™ LED Flood Lights



120W



200W & 310W

CCTs Available:



3 pin NEMA twist lock receptacle with removable shorting cap included, Narrow optics and visors available. Multiple mounting options available.

MODEL NUMBER	FML120UW-40BTSRPC	FMX200UW-50BSKRPC	FMX310UW-40BTSRPC
ORDER CODE	14100157	14100160	14100165
Input Wattage	110W	218W	307W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	14,300 lm	29,500 lm	39,600 lm
Efficacy (lm/W)	130 lm/W	135 lm/W	129 lm/W
Color Rendering Index (CRI)	>70	>70	>70
Beam Spread	Wide (6x6)	Wide (6x6)	Wide (6x6)
Color Temperature (CCT)	4000K	5000K	4000K
Replacement	400W MH	750W MH	1000 MH
Dimming Compatible	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	100,000 hours	100,000 hours	100,000 hours
Mounting	Trunnion	Knuckle Slipfitter	Trunnion
LISTINGS	cULus, IP65, DLC Premium	cULus, IP65, DLC Premium	cULus, IP65, DLC Premium

*Contact MaxLite for lead times.

Steel 4" Straight Square Poles



MODEL NUMBER	PL-SQ4-15T11-BQ	PL-SQ4-20T11-BQ	PL-SQ4-25T11-BQ
ORDER CODE	14100934	14100935	14100936
Height	15'	20'	25'
Shaft Size	4" Square	4" Square	4" Square
Gauge	11	11	11
Finish	Bronze	Bronze	Bronze
Mounting	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details.
*BAA - Contact MaxLite for lead times.

Steel 5" Straight Square Poles



MODEL NUMBER	PL-SQ5-25T11-BQ	PL-SQ5-30T11-BQ	PL-SQ5-30T07-BQ
ORDER CODE	14100937	14100938	14100939
Height	25'	30'	30'
Shaft Size	5" Square	5" Square	5" Square
Gauge	11	11	7
Finish	Bronze	Bronze	Bronze
Mounting	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details.
*BAA - Contact MaxLite for lead times.

Aluminum 4" Straight Square Poles



MODEL NUMBER	PL-SA4-12T1-B	PL-SA4-15T1-B	PL-SA4-16T3-B	PL-SA4-20T3-B
ORDER CODE	14102083	14102085	14102087	14102089
Height	12'	15'	16'	20'
Shaft Size	4" Square	4" Square	4" Square	4" Square
Wall Thickness	0.125"	0.125"	0.188"	0.188"
Finish	Bronze	Bronze	Bronze	Bronze
Mounting	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details.
*BAA - Contact MaxLite for lead times.

Aluminum 5" Straight Square Poles



MODEL NUMBER	PL-SA5-20T3-B	PL-SA5-25T3-B
ORDER CODE	14102091	14102093
Height	20'	25'
Shaft Size	5" Square	5" Square
Wall Thickness	0.188"	0.188"
Finish	Bronze	Bronze
Mounting	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details.
*BAA - Contact MaxLite for lead times.

Steel 3" Straight Round Poles



MODEL NUMBER	PL-RS3-08T11-B	PL-RS3-10T11-B	PL-RS3-12T11-B
ORDER CODE	14101881	14101885	14101889
Height	8'	10'	12'
Shaft Size	3" Round	3" Round	3" Round
Gauge	11	11	11
Finish	Bronze	Bronze	Bronze
Mounting	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details.

Steel 4" Straight Round Poles



MODEL NUMBER	PL-RS4-15T11-B	PL-RS4-20T11-B
ORDER CODE	14101860	14101864
Height	15'	20'
Shaft Size	4" Round	4" Round
Gauge	11	11
Finish	Bronze	Bronze
Mounting	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details. *BAA - Contact MaxLite for lead times.

Steel 5" Straight Round Poles



MODEL NUMBER	PL-RS5-25T11-B	PL-RS5-30T11-B	PL-RS5-30T07-B
ORDER CODE	14101869	14101877	14101875
Height	25'	30'	30'
Shaft Size	5" Round	5" Round	5" Round
Gauge	11	11	7
Finish	Bronze	Bronze	Bronze
Mounting	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details. *BAA - Contact MaxLite for lead times.

Aluminum 5" Straight Round Poles




MODEL NUMBER	PL-RA5-12T3-B	PL-RA5-16T3-B	PL-RA5-20T3-B
ORDER CODE	14102076	14102078	14102080
Height	12'	16'	20'
Shaft Size	5" Round	5" Round	5" Round
Wall Thickness	0.188"	0.188"	0.188"
Finish	Bronze	Bronze	Bronze
Mounting	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details. *BAA - Contact MaxLite for lead times.

Mounting Accessories

BULLHORN - 2.375" wide x 4" tall Tenon Top




PL-BB218-B




PL-BB318L-B




PL-BB318-B



PL-BB312-B



PL-BB490-B



PL-BB418-B

SPOKE BRACKETS - 2.375" wide x 4" tall Tenon Top




PL-SB190-B



PL-SB218-B



R4HT290BZ



PL-SB390-B



PL-SB490-B

POLES FITTER



S4VT1S00B (4" SQ POLE)
S5VT1S00B (5" SQ POLE)




S4HT218BZ (4" SQ POLE)
S5HT218BZ (5" SQ POLE)



S4HT290BZ (4" SQ POLE)
S5HT290BZ (5" SQ POLE)



S4HT390BZ
(4" SQ POLE)



S4HT490BZ
(4" SQ POLE)


SQUARE BRACKET




PL-SM218-B
(4" SQ POLE)



S5VT2S18BZ
(5" SQ POLE)



S4VT3S18BZ (4" SQ POLE)
S5VT3S18BZ (5" SQ POLE)



S4VT4S90BZ (4" SQ POLE)
S5VT4S90BZ (5" SQ POLE)

AR/QMP/MP-AR POLE ADAPTOR



UPMA-B (BRONZE)
UPMA-S (SILVER)



UPMA-4RPA-B (4" RD)
UPMA-5RPA-B (5" RD)

TENON REDUCER



TR2.37BZ
(2-3/8" TO 1/2")



TR3BZ
(3" TO 2-3/8")



R4VT1S00BZ
(4" TO 2-3/8")

WALL MOUNT BRACKET



WMB1HB



WMB1VB

SWIVEL BRACKET



SB2BZ
(RATED FOR 18LBS. MAX)

WOOD POLES COLLAR BULLHORN



PL-CB190-9B (POLE Ø 5"-9")
PL-CB190-13B (POLE Ø 10"-13")



PL-CB218-9B (POLE Ø 5"-9")
PL-CB218-13B (POLE Ø 10"-13")




PL-CB390-9B (POLE Ø 5"-9")
PL-CB390-13B (POLE Ø 10"-13")



PL-CB490-9B (POLE Ø 5"-9")
PL-CB490-13B (POLE Ø 10"-13")


* 50 lbs max / arm for poles Ø 5"-9" applicable brackets | 90 lbs max/arm for poles Ø 10"-13" applicable brackets

WOOD POLES ANGLE CROSSARM




PL-XAB2-B (2 FIXTURES)
PL-XAB3-B (3 FIXTURES)
PL-XAB4-B (4 FIXTURES)
PL-XAB5-B (5 FIXTURES)

STEEL POLES COLLAR CROSSARM



PL-XCB2-B (2 FIXTURES)
PL-XCB3-B (3 FIXTURES)
PL-XCB4-B (4 FIXTURES)
PL-XCB5-B (5 FIXTURES)

STEEL POLES SIDE CROSSARM



PL-XSB2-B (2 FIXTURES)
PL-XSB3-B (3 FIXTURES)
PL-XSB4-B (4 FIXTURES)
PL-XSB5-B (5 FIXTURES)
PL-XSB6-B (6 FIXTURES)

FLOOD ACCESSORIES



JBOXB-4TH



MTGCOVER



GROUNDSTAKE

* Review product specs on our website for dimensions or contact us for a detailed drawing

PathMax™ Classic Series Round Flat Top Bollards



CCTs Available:



	36"	42"	42"	42"
MODEL NUMBER	BL-CLRF38U-40B36	BL-CLRF17U-40B	BL-CLRF17U-40BT3	BL-CLRF17U-40BLR
ORDER CODE	14101675	14100775	14100776	14100777
Input Wattage	38W	17W	17W	17W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,610 lm	1,458 lm	989 lm	747 lm
Efficacy (lm/W)	95 lm/W	86 lm/W	58 lm/W	44 lm/W
Color Rendering Index (CRI)	>80	>80	>80	>80
Distribution	Wide Beam	Wide Beam	Type 3	Louver
Color Temperature (CCT)	4000K	4000K	4000K	4000K
Replacement	150W MH	70W MH	70W MH	70W MH
Dimming Compatible	N/A	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	>50,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
LISTINGS	cULus, IP65	CSA Group Listed, IP65, BAA	CSA Group Listed, IP65, BAA	CSA Group Listed, IP65, BAA

Available in different finishes and custom heights; and with accessories such as GFCI receptacle, and glare shield.

PathMax™ Classic Series Round Dome Top Bollards



CCTs Available:



	36"	42"	42"	42"
MODEL NUMBER	BL-CLRD38U-40B36	BL-CL2RD18U-40B	BL-CLRD17U-40BT3	BL-CLRD17U-40BLR
ORDER CODE	14101671	103775	14100979	14100980
Input Wattage	38W	18W	17W	17W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,610 lm	2,200 lm	989 lm	733 lm
Efficacy (lm/W)	95 lm/W	118 lm/W	58 lm/W	43 lm/W
Color Rendering Index (CRI)	>80	>80	>80	>80
Distribution	Wide Beam	Wide Beam	Type 3	Louver
Color Temperature (CCT)	4000K	4000K	4000K	4000K
Replacement	150W MH	70W MH	70W MH	70W MH
Dimming Compatible	N/A	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours
LISTINGS	cULus, IP65	UL Listed, IP65, DLC Premium	CSA Group listed, IP65, BAA	CSA Group listed, IP65, BAA

Available in different finishes and custom heights; and with accessories such as GFCI receptacle, and glare shield.

WallMAX™ LED Cut Off Wall Packs w/ Selectable CCT



CCTs Available:



MODEL NUMBER	WPCL40UT4-CSB	WPCL70UT4-CSB	WPCL100UT4-CSB
ORDER CODE	104033	104034	104035
Input Wattage	40W	70W	100W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	5,225 lm	8,870 lm	12,740
Efficacy (lm/W)	124 lm/W	123 lm/W	124 lm/W
Color Rendering Index (CRI)	>80	>80	>80
Color Temperature (CCT)	3000/4000/5000K	3000/4000/5000K	3000/4000/5000K
Replacement	150W MH	200W MH	250W MH
Dimming Compatible	Yes	Yes	Yes
Lumen Maintenance (L70)	130,000 hours	130,000 hours	130,000 hours
LISTINGS	cETLus, DLC Premium	cETLus, DLC Premium	cETLus, DLC Premium

Photo/motion sensor and photo control options available.

WallMAX™ LED Open Face Wall Packs



CCTs Available:



CCT Selectable/controls ready version coming soon.
Check maxlite.com for more info.



MODEL NUMBER	WP-OP28U-50B	WP-OP40U-50B	WP-OP50U-50B	WP-OP80U-50B	WP-OP120U-50B
ORDER CODE	100192	100197	100198	100199	100200
Input Wattage	28W	40W	50W	80W	120W
Voltage	120-277V	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,640 lm	5,540 lm	7,065 lm	11,375 lm	16,945 lm
Efficacy (lm/W)	130 lm/W	135 lm/W	135 lm/W	140 lm/W	140 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80	≥80
Color Temperature (CCT)	5000K	5000K	5000K	5000K	5000K
Replacement	150W MH	175W MH	250W MH	400W MH	400W MH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
LISTINGS	cETLus, DLC Premium	cETLus, DLC Premium	cETLus, DLC Premium	cETLus, DLC Premium	cETLus, DLC Premium

Photo/motion sensor, photocell, 347-480V, and battery backup options available.

WallMAX™ LED Thin Cut Off Wall Packs w/ Selectable CCT



CCTs Available:



MODEL NUMBER	WP-ADS15U-CSBPC	WP-ADS20U-50B-PC	WP-ADS29U-40B/PC	WP-ADS29U-CSBPC
ORDER CODE	105039	108002	101984	104541
Input Wattage	15W	20W	29W	29W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,900 lm	2,100 lm	3,000 lm	3,480 lm
Efficacy (lm/W)	122 lm/W	105 lm/W	103 lm/W	129 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	3000/4000/5000K	5000K	5000K	3000/4000/5000K
Replacement	100W MH	150W MH	175W MH	175W MH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
LISTINGS	cETLus, DLC Premium	cETLus, DLC Premium	cETLus, DLC Premium	cETLus, DLC Premium

Photocell with removable cap included standard, fixture adjustable from 0-90 degree, motion sensor and battery backup options available.

LED Dusk to Dawn Barn Lights w/ Selectable CCT



CCTs Available:



MODEL NUMBER	DBL28UT5-CSG	DBL40UT5-CSG	DBL60UT5-CSG
ORDER CODE	104093	104094	104095
Input Wattage	28W	40W	60W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,360 lm	4,620 lm	7,470 lm
Efficacy (lm/W)	120 lm/W	121 lm/W	125 lm/W
Color Rendering Index (CRI)	>80	>80	>80
Color Temperature (CCT)	3000/4000/5000K	3000/4000/5000K	3000/4000/5000K
Distribution	Type V	Type V	Type V
Replacement	100W MH	150W MH	175W MH
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	140,000 hours	143,000 hours	144,000 hours
LISTINGS	cULus, DLC Premium	cULus, DLC Premium	cULus, DLC Premium

28W includes button PC with removable cap without mounting arm.
40/60W include twist lock PC and mounting arm.

GuardMAX™ LED Entry Wall Packs



CCTs Available:



MODEL NUMBER	SEC15U40BPC
ORDER CODE	101550
Input Wattage	15W
Voltage	120V-277V
Delivered Lumens (lm)	1,850 lm
Efficacy (lm/W)	124 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	4000K
Replacement	100W
Dimming Compatible	No
Lumen Maintenance (L70)	>120,000 hours
LISTINGS	cETLus, DLC Premium, FCC, IP65

120-277V photocontrol with removable cap standard. White finish option also available.

GuardMAX™ LED Emergency Wall Packs



CCTs Available:




MODEL NUMBER	0°C DEGREE BATTERY BACKUP	-30°C DEGREE BATTERY BACKUP
	SECR12U-50BPCEM0	SECR12U-50BPCEM2
ORDER CODE	103275	103276
Input Wattage	12W	12W
Voltage	120V-277V	120V-277V
Delivered Lumens (lm)	1,275 lm	1,275 lm
Efficacy (lm/W)	86 lm/W	86 lm/W
Color Rendering Index (CRI)	≥70	≥70
Color Temperature (CCT)	5000K	5000K
Replacement	42W CFL	42W CFL
Dimming Compatible	No	No
Lumen Maintenance (L70)	xx hours	xx hours
LISTINGS	cULus, FCC	cULus, FCC

GuardMAX™ LED Slim Profile Security Light w/ Selectable CCT



CCTs Available:



MODEL NUMBER	SECS15UCSBPC	SECS20UCSBPC	SECS26UCSBPC
ORDER CODE	103975	103855	103856
Input Wattage	15W	20W	26W
Voltage	120-277V	120-278V	120-279V
Delivered Lumens (lm)	1,900 lm	2,520 lm	3,320 lm
Efficacy (lm/W)	126 lm/W	126 lm/W	124 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	4000/5000K	4000/5000K	4000/5000K
Replacement	100W MH	150W MH	175W MH
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	DLC, cULus, FCC, IP66	DLC, cULus, FCC, IP66	DLC, cULus, FCC, IP66

Bulb in Box - Cylinder & Globe Security Fixture



CCTs Available:



W/ PHOTOCELL AND COVER CAP

MODEL NUMBER	SECCEC09B	SECCEW09BPC
ORDER CODE	103899	103898
Input Wattage	9W	9W
Voltage	120V	120V
Delivered Lumens (lm)	800 lm	800 lm
Efficacy (lm/W)	88 lm/W	88 lm/W
Color Rendering Index (CRI)	90	90
Color Temperature (CCT)	3000K	3000K
Replacement	60W INC	60W INC
Dimming Compatible	Triac	Triac
Lumen Maintenance (L70)	25,000 hours	25,000 hours
LISTINGS	JAB Bulb, ENERGY STAR®, Title 24, cETLus, FCC	JAB Bulb, ENERGY STAR®, Title 24, cETLus, FCC

Globe Lens available.

LED Lamp Ready Vaporproof Jelly Jars



Colored PC Lens Available:



CCTs Available:



	WALL MOUNT	CEILING MOUNT
MODEL NUMBER	JJW12001	JJC12001
ORDER CODE	101439	101443
Number of Lamps	1 x A19 E26 Base	1 x A19 E26 Base
Voltage	120V	120V
Max Wattage	100W INC	100W INC
LISTINGS	cULus, ENERGY STAR®	cULus, ENERGY STAR®

JAB and ENERGY STAR® certified lamp included. Optional dusk to dawn lamp with integrated photocell available.

LED Universal Adjustable Jelly Jar w/ Selectable CCT



CCTs Available:




MODEL NUMBER	JJX20UCS
ORDER CODE	105177
Input Wattage	20W
Voltage	120-277V
Delivered Lumens (lm)	1,800 lm
Efficacy (lm/W)	90 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	3000/4000/5000K
Replacement	150W INC
Dimming Compatible	N/A
Lumen Maintenance (L70)	≥50,000 hours
Mounting	Pendant, Ceiling, Wall Mount
LISTINGS	IP65, ENERGY STAR®, FCC

LED Low-Profile Canopy Luminaires



CCTs Available:



MODEL NUMBER	CPL20BUC50B	CPL30BUC50B	CPL40BUC50B	CPL52BUC50B
ORDER CODE	1408347	102005	102010	102335
Input Wattage	20W	30W	40W	53W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,415 lm	3,525 lm	5,150 lm	6,510 lm
Efficacy (lm/W)	120 lm/W	118 lm/W	123 lm/W	125 lm/W
Color Rendering Index (CRI)	≥70	≥70	≥70	≥70
Color Temperature (CCT)	5000K	5000K	5000K	5000K
Replacement	100W MH	150W MH	175W MH	250W MH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
LISTINGS	DLC Premium, ETL	DLC Premium, cULus	DLC Premium, cULus	DLC Premium, cULus

Motion Sensor, Photocell, Battery Backup and 480V (30W+) available.
Contact your Maxlite representative for different finishes.
*Contact MaxLite for lead times.

LED Low-Profile Parking Garage Canopy Luminaires



CCTs Available:



MODEL NUMBER	CPL20BUP50B	CPL30BUP50B	CPL40BUP50B	CPL52BUP50B
ORDER CODE	1408349	102001	101024	102339
Input Wattage	20W	30W	40W	53W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,200 lm	3,320 lm	4,645 lm	6,095 lm
Efficacy (lm/W)	116 lm/W	111 lm/W	113 lm/W	115 lm/W
Color Rendering Index (CRI)	≥70	≥70	≥70	≥70
Color Temperature (CCT)	5000K	5000K	5000K	5000K
Replacement	100W MH	150W MH	175W MH	250W MH
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Lumen Maintenance (L70)	>100,000 hours	>100,000 hours	>100,000 hours	>100,000 hours
LISTINGS	DLC Premium, ETL	DLC Premium, cULus	DLC Premium, cULus	DLC Premium, cULus

Motion Sensor, Photocell, Battery Backup and 480V (30W+) available.
Contact your Maxlite representative for different finishes.
*Contact MaxLite for lead times.

Flood Class I Division 1 HL-AR-D1 Series



347-480V options also available.
Available in 25°, 60°, and 120° beam angles.

CCTs Available:

5000K

MODEL NUMBER	HL-AR80UW-50G-D1	HL-AR100UW-50G-D1	HL-AR150UW-50G-D1
ORDER CODE	1409541	1409543	1409545
Input Wattage	80W	100W	150W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	9,600 lm	12,000 lm	18,245 lm
Efficacy (lm/W)	120 lm/W	120 lm/W	120 lm/W
Color Rendering Index (CRI)	≥70	≥70	≥70
Color Temperature (CCT)	5000K	5000K	5000K
Distribution	120°	120°	120°
Replacement	175W MH	400W MH	400W PSMH
Temperature Rating	T6	T6	T6
Lumen Maintenance (L70)	>100,000 hours	>100,000 hours	>100,000 hours
LISTINGS	UL844, UL1598, UL1598A, DLC Premium	UL844, UL1598, UL1598A, DLC Premium	UL844, UL1598, UL1598A, DLC Premium

Flood Class I Division 2 HL-AR Series



347-480V options also available.
Available in 25°, 60°, and 120° beam angles.

CCTs Available:

5000K

MODEL NUMBER	HL-AR80UW-50G	HL-AR100UW-50G	HL-AR150UW-50G
ORDER CODE	107618	1409413	107620
Input Wattage	80W	100W	150W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	9,600 lm	12,000 lm	18,245 lm
Efficacy (lm/W)	120 lm/W	120 lm/W	120 lm/W
Color Rendering Index (CRI)	≥70	≥70	≥70
Color Temperature (CCT)	5000K	5000K	5000K
Distribution	120°	120°	120°
Replacement	175W MH	400W MH	400W PSMH
Temperature Rating	T4A	T4A	T4A
Lumen Maintenance (L70)	>100,000 hours	>100,000 hours	>100,000 hours
LISTINGS	UL1598A, UL844, DLC Premium	UL1598A, UL844, DLC Premium	UL1598A, UL844, DLC Premium

High Output Flood Class I Division 2 HL-ELLF Series



Available in 18° & 58° beam angles.
Available with 347-480V.

CCTs Available:

5000K

MODEL NUMBER	ELLF135UW50AGSH12	ELLF270UW50AGSH12	ELLF405UW50AGSH12
ORDER CODE	74450	74819	74793
Input Wattage	135W	270W	405W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	15,830 lm	31,660 lm	47,490 lm
Efficacy (lm/W)	112 lm/W	112 lm/W	112 lm/W
Color Rendering Index (CRI)	≥70	≥70	≥70
Color Temperature (CCT)	5000K	5000K	5000K
Distribution	120°	120°	120°
Replacement	320W PSMH	750W PSMH	1000W MH
Dimming Compatible	0-10V	0-10V	0-10V
Temperature Rating	T4	T4	T4
Lumen Maintenance (L70)	>75,000 hours	>75,000 hours	>75,000 hours
LISTINGS	UL1598, UL844	UL1598, UL844	UL1598, UL844

Linear Class I Division 2 HL-LI Series



CCTs Available:

5000K

MODEL NUMBER	HL-LI2440	HL-LI4880
ORDER CODE	1409547	1409549
Input Wattage	40W	80W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	5,480 lm	10,960 lm
Efficacy (lm/W)	130 lm/W	130 lm/W
Color Rendering Index (CRI)	≥70	≥70
Color Temperature (CCT)	5000K	5000K
Temperature Rating	T3C	T3C
Lumen Maintenance (L70)	>100,000 hours	>100,000 hours
LISTINGS	UL844, UL8750, UL1598A, DLC Premium	UL844, UL8750, UL1598A, DLC Premium

40W = 2-FT, 80W = 4-FT
347-480V options also available.
Available in 110° beam angles.

Linear Class I Division 1 HL-LI Series



CCTs Available:

3000K

4000K

5000K

MODEL NUMBER	HL-LI2440UP-D1	HL-LI4880UP-D1
ORDER CODE	103013	103014
Input Wattage	38W	80W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	4,500 lm	9,200 lm
Efficacy (lm/W)	118 lm/W	115 lm/W
Color Rendering Index (CRI)	> 70	> 70
Color Temperature (CCT)	4000K	4000K
Replacement	150W MH	250W MH
Dimming Compatible	0-10V	0-10V
Lumen Maintenance (L70)	>50,000 hours	>50,000 hours
Mounting	Pendant Mount	Pendant Mount
LISTINGS	DLC Standard, UL844, UL8750, UL1598A, UL1598, FCC	DLC Standard, UL844, UL8750, UL1598A, UL1598, FCC

Available with yoke mount; secondary retention point, safety cable (rated for 250lbs), and EM option.

Wall Pack Class I Division 2 HL-WP Series



CCTs Available:

4000K

5000K

MODEL NUMBER	HL-WP26U40	HL-WP26U50	HL-WP43U40	HL-WP43U50
ORDER CODE	14101835	14101734	14101837	14101836
Input Wattage	26W	26W	43W	43W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,199 lm	3,332 lm	5,316 lm	5,538 lm
Efficacy (lm/W)	121 lm/W	126 lm/W	123 lm/W	128 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	4000K	5000K	4000K	5000K
Distribution	110°	110°	110°	110°
Replacement	70W HID	70W HID	150W HID	150W HID
Dimming Compatible	0-10V	0-10V	0-10V	0-10V
Temperature Rating	T4	T4	T4	T4
Lumen Maintenance (L70)	147,000 hours	147,000 hours	147,000 hours	147,000 hours
LISTINGS	IP66, BAA, ETL	IP66, BAA, ETL	IP66, BAA, ETL	IP66, BAA, ETL

*BAA - Contact MaxLite for lead times.

High Bay Class I Division 2 HLRS Series



CCTs Available:



MODEL NUMBER	HLRS45UP	HLRS65UP
ORDER CODE	103299	103300
Input Wattage	42W	65W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	6,685 lm	10,136 lm
Efficacy (lm/W)	158 lm/W	156 lm/W
Color Rendering Index (CRI)	≥70	≥70
Color Temperature (CCT)	5000K	5000K
Beam Angle	110°	110°
Replacement	100W MH	175W MH
Temperature Rating	T4A-T5	T4A-T5
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	UL1598, UL1598A, UL844, FCC	UL1598, UL1598A, UL844, FCC

347-480V options also available. Pendant, Swivel, Ceiling, Wall and Stanchion mount options available.

High Bay Class I Division 2 HLRM Series



CCTs Available:



MODEL NUMBER	HLRM80U	HLRM120U	HLRM150U	HLRM200U
ORDER CODE	104877	104894	104912	104931
Input Wattage	80	120	150	200
Voltage	120-277	120-277	120-277	120-277
Delivered Lumens (lm)	12000	18000	22500	30000
Efficacy (lm/W)	150	150	150	150
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	5000	5000	5000	5000
Beam Angle	110°	110°	110°	110°
Replacement	320W MH	450W MH	600W MH	750W MH
Temperature Rating	X	X	X	X
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cETLus Classified, FCC, IP66	cETLus Classified, FCC, IP66	cETLus Classified, FCC, IP66	cETLus Classified, FCC, IP66

347-480V; Drop lens and Diffused lens options available. Wire guard, yoke bracket, Wall and Stanchion mount accessories also available.

Low Bay/Jelly Jar Class I Division 2 HLRS Series



CCTs Available:



MODEL NUMBER	HLRS45ULP	HLRS65ULP
ORDER CODE	103301	103302
Input Wattage	45W	65W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	5,760 lm	8,900 lm
Efficacy (lm/W)	136 lm/W	137 lm/W
Color Rendering Index (CRI)	≥70	≥70
Color Temperature (CCT)	5000K	5000K
Distribution	130°	130°
Replacement	100W MH	175W MH
Temperature Rating	T4A-T5	T4A-T5
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	UL1598, UL1598A, UL844, FCC	UL1598, UL1598A, UL844, FCC

347-480V options also available. Pendant, Swivel, Ceiling, Wall and Stanchion mount options available.

PhotonMAX® Horticulture LED Spot Lights (120-277V)



MODEL NUMBER	PH-GH360UBPRF-WCO	PH-GH360UBPRX-WCO	PH-GH360UBXRF-WCO	PH-GH360UFSRF-WCO
ORDER CODE	14100180	14100177	14100178	14100179
Input Wattage	360W	360W	360W	360W
PPF	680.1 (μmol/S)	755.2 (μmol/S)	699.8 (μmol/S)	753.2 (μmol/S)
Voltage	120-277V	120-277V	120-277V	120-277V
Spectrum	Blue 450nm with Heavy Red 660nm and Far Red 730nm	Broad Par with Heavy 660nm and Far Red 730nm	Broad Par with Heavy 660nm and Far Red 730nm	Full Spectrum with Heavy Red 660nm and Far Red 730nm
Photon Flux Maintenance (Q90)	>42,000 hours	>42,000 hours	>42,000 hours	>42,000 hours
LISTINGS	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66

PhotonMAX® Horticulture LED Spot Lights (120-277V)



MODEL NUMBER	PH-GH600UBPRF-WCO	PH-GH600UBPRX-WCO	PH-GH600UBXRF-WCO	PH-GH600UFSRF-WCO
ORDER CODE	14100171	14100169	14100167	14100168
Input Wattage	600W	600W	600W	600W
PPF	1,088.5 (μmol/S)	1,143.7 (μmol/S)	1,234.7 (μmol/S)	1,224.2 (μmol/S)
Voltage	120-277V	120-277V	120-277V	120-277V
Spectrum	Blue 450nm with Heavy Red 660nm and Far Red 730nm	Broad Par with Heavy 660nm and Far Red 730nm	Broad Par with Heavy 660nm and Far Red 730nm	Full Spectrum with Heavy Red 660nm and Far Red 730nm
Photon Flux Maintenance (Q90)	>42,000 hours	>42,000 hours	>42,000 hours	>42,000 hours
LISTINGS	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66

PhotonMAX® Horticulture LED Spot Lights (347-480V)



MODEL NUMBER	PH-GH360HBPRF-WCO	PH-GH360HBPRX-WCO	PH-GH360HBXRF-WCO	PH-GH360HFSRF-WCO
ORDER CODE	14100185	14100182	14100183	14100184
Input Wattage	360W	360W	360W	360W
PPF	680.1 (μmol/S)	755.2 (μmol/S)	699.8 (μmol/S)	753.2 (μmol/S)
Voltage	347-480V	347-480V	347-480V	347-480V
Spectrum	Blue 450nm with Heavy Red 660nm and Far Red 730nm	Broad Par with Heavy 660nm and Far Red 730nm	Broad Par with Heavy 660nm and Far Red 730nm	Full Spectrum with Heavy Red 660nm and Far Red 730nm
Photon Flux Maintenance (Q90)	>42,000 hours	>42,000 hours	>42,000 hours	>42,000 hours
LISTINGS	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66

PhotonMAX® Horticulture LED Spot Lights (347-480V)



MODEL NUMBER	PH-GH360UBPRF-WCO	PH-GH360UBPRX-WCO	PH-GH360UBXRF-WCO	PH-GH360UFSRF-WCO
ORDER CODE	14100180	14100177	14100178	14100179
Input Wattage	600W	600W	600W	600W
PPF	1,088.5 (μmol/S)	1,143.7 (μmol/S)	1,234.7 (μmol/S)	1,224.2 (μmol/S)
Voltage	347-480V	347-480V	347-480V	347-480V
Spectrum	Blue 450nm with Heavy Red 660nm and Far Red 730nm	Broad Par with Heavy 660nm and Far Red 730nm	Broad Par with Heavy 660nm and Far Red 730nm	Full Spectrum with Heavy Red 660nm and Far Red 730nm
Photon Flux Maintenance (Q90)	>42,000 hours	>42,000 hours	>42,000 hours	>42,000 hours
LISTINGS	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66	Horticultural DLC, UL listed, IP66

PhotonMAX® Horticulture LED Linear Lights (120-277V)



Photon Flux Maintenance (Q90)



MODEL NUMBER	PH-LI200UBPRX-W	PH-LI200UBPBX-W	PH-LI200UFSRX-W
ORDER CODE	103377	14102045	14102044
Input Wattage	200W	200W	200W
PPF	461 (μmol/S)	466 (μmol/S)	507 (μmol/S)
Voltage	120-277V	120-277V	120-277V
Spectrum	Broad Par with Heavy 660nm	Broad Par with Heavy 660nm	Full Spectrum with Heavy 660nm
Photon Flux Maintenance (Q90)	>42,000 hours	>42,000 hours	>42,000 hours
LISTINGS	Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65	Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65	Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65

PhotonMAX® Horticulture LED Linear Lights (120-277V)



Photon Flux Maintenance (Q90)



MODEL NUMBER	PH-LI300UBPRX-W
ORDER CODE	14102049
Input Wattage	300W
PPF	741 (μmol/S)
Voltage	120-277V
Spectrum	Broad Par with Heavy 660nm
Photon Flux Maintenance (Q90)	>42,000 hours
LISTINGS	Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65

PhotonMAX® Horticulture LED Linear Lights (347-480V)



Photon Flux Maintenance (Q90)



MODEL NUMBER	PH-LI200HBPRX-W	PH-LI200HBPBX-W	PH-LI200HFSRX-W
ORDER CODE	14102046	14102048	14102047
Input Wattage	200W	200W	200W
PPF	461 (μmol/S)	466 (μmol/S)	507 (μmol/S)
Voltage	347-480V	347-480V	347-480V
Spectrum	Broad Par with Heavy 660nm	Broad Par with Heavy 660nm	Full Spectrum with Heavy 660nm
Photon Flux Maintenance (Q90)	>42,000 hours	>42,000 hours	>42,000 hours
LISTINGS	Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65	Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65	Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65

PhotonMAX® Horticulture LED Linear Lights (347-480V)



Photon Flux Maintenance (Q90)



MODEL NUMBER	PH-LI300HBPRX-W
ORDER CODE	14102050
Input Wattage	300W
PPF	741 (μmol/S)
Voltage	347-480V
Spectrum	Broad Par with Heavy 660nm
Photon Flux Maintenance (Q90)	>42,000 hours
LISTINGS	Horticultural DLC (Pending 11/19), UL listed (Pending 11/19), IP65

PhotonMAX® Horticulture Ceramic Metal Halide Single Lamp Fixtures



MODEL NUMBER	PH-MHF315130	PH-MHF315230
ORDER CODE	107827	14099003
Input Wattage	315W	315W
Voltage	120V	277V
Lifetime (L70)	10,000 hours	10,000 hours
LISTINGS	ETL/CETL	ETL/CETL

PhotonMAX® Horticulture Ceramic Metal Halide Two Lamp Fixtures



MODEL NUMBER	PH-MHF630130	PH-MHF630230
ORDER CODE	1409956	14099004
Input Wattage	630W	630W
Voltage	120V	277V
Lifetime (L70)	10,000 hours	10,000 hours
LISTINGS	ETL/CETL	ETL/CETL

Contact your MaxLite representative if your voltage is not listed.

PhotonMAX® Horticulture Doubled-Ended High Pressure Sodium Fixtures



Model Number	PH-1000HPS-F-DE	PH-1000HPS2-F-DE	PH-1000HPS3-F-DE
Order Code	1409955	14099005	14099631
Input Wattage	1000W	1000W	1000W
Voltage	120-240V	220-277V	347V
Lifetime (L70)	10,000 hours	10,000 hours	10,000 hours
LISTINGS	ETL/CETL	ETL/CETL	ETL/CETL

Contact your MaxLite representative if your voltage is not listed.

PhotonMAX® Horticulture Ceramic Metal Halide Lamp



MODEL NUMBER	PGZ18 BASE PH-MHL315130
ORDER CODE	107826
Input Wattage	315W
PPF	480 (μmol/S)
Voltage	120-277V
L70	10,000 hours

PhotonMAX® Horticulture Doubled-Ended High Pressure Sodium Lamp



MODEL NUMBER	PH-1000HPS-L-DE
ORDER CODE	1410139
Input Wattage	1,000W
PPF	≥1,950 (μmol/S)
Voltage	400V
L70	10,000 Hours
LISTINGS	CE

LED Filament Lamps



CCTs Available:

2700K

5000K

	G25 CLEAR (E26 BASE)	G25 CLEAR (E26 BASE)	G25 FROSTED (E26 BASE)	G25 FROSTED (E26 BASE)
MODEL NUMBER	EF3G25D27	EF4.5G25D27	EFF3G25D27	EFF4.5G25D27
ORDER CODE	103764	103744	103766	103770
Input Wattage	3W	4.5W	3W	4.5W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	350 lm	500 lm	350 lm	500 lm
Efficacy (lm/W)	116 lm/W	111 lm/W	116 lm/W	111 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	2700K	2700K	2700K	2700K
Replacement	40W Inc	60W Inc	40W Inc	60W Inc
Dimming Compatible	Yes	Yes	Yes	Yes
Lumen Maintenance (L70)	15,000 hours	15,000 hours	15,000 hours	15,000 hours
LISTINGS	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®

LED JA8 Certified
Filament Lamps

CCTs Available:

2700K

	B10 (E12 BASE)	T10 (E26 BASE)
MODEL NUMBER	EF4B10D927/JA8	F4T10DLED927/JA8
ORDER CODE	103409	1409894
Input Wattage	4W	4W
Voltage	120V	120V
Delivered Lumens (lm)	300 lm	300 lm
Efficacy (lm/W)	75 lm/W	75 lm/W
Color Rendering Index (CRI)	94	91
Color Temperature (CCT)	2700K	2700K
Replacement	40W INC	40W INC
Dimming Compatible	Yes	Yes
Lumen Maintenance (L70)	15,000 hours	15,000 hours
LISTINGS	cULus, ENERGY STAR®, T20, JA8	cULus, ENERGY STAR®, T20, JA8

LED JA8 Certified
Filament Lamps

CCTs Available:

2200K

2700K

	ST19 (E26 BASE)	ST19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	V6.5ST19DLED922/JA8	F7ST19DLED927/JA8	EF8.5A19D927/JA8
ORDER CODE	1409893	14098828	102275
Input Wattage	6.5W	7W	8.5W
Voltage	120V	120V	120V
Delivered Lumens (lm)	450 lm	600 lm	800 lm
Efficacy (lm/W)	69 lm/W	86 lm/W	94 lm/W
Color Rendering Index (CRI)	96	91	91
Color Temperature (CCT)	2200K	2700K	2700K
Replacement	40W INC	60W INC	60W INC
Dimming Compatible	Yes	Yes	Yes
Lumen Maintenance (L70)	15,000 hours	15,000 hours	15,000 hours
LISTINGS	cULus, ENERGY STAR®, T20, JA8	cULus, ENERGY STAR®, T20, JA8	cULus, ENERGY STAR®, T20, JA8

LED Enclosed Rated Frosted Filament Lamps



CCTs Available:

2700K



	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E12 BASE)
MODEL NUMBER	EFF3.5B1027	EFF3.5B1027C	EFF5B1027	EFF5B1027C
ORDER CODE	14101729	14101727	14101733	14101731
Input Wattage	3.5W	3.5W	5W	5W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	325 lm	325 lm	525 lm	525 lm
Efficacy (lm/W)	92 lm/W	92 lm/W	105 lm/W	105 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	2700K	2700K	2700K	2700K
Replacement	40W INC	40W INC	60W INC	60W INC
Dimming Compatible	Yes	Yes	Yes	Yes
Lumen Maintenance (L70)	15,000 hours	15,000 hours	15,000 hours	15,000 hours
LISTINGS	cULus	cULus	cULus	cULus

LED Enclosed Rated Frosted Filament Lamps



CCTs Available:

2700K



	B10 BENT TIP (E26 BASE)	B10 BENT TIP (E12 BASE)	B10 BENT TIP (E26 BASE)	B10 BENT TIP (E12 BASE)
MODEL NUMBER	EFF3.5BA1027	EFF3.5BA1027C	EFF5BA1027	EFF5BA1027C
ORDER CODE	14101728	14101726	14101732	14101730
Input Wattage	3.5W	3.5W	5W	5W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	325 lm	325 lm	525 lm	525 lm
Efficacy (lm/W)	92 lm/W	92 lm/W	105 lm/W	105 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	2700K	2700K	2700K	2700K
Replacement	40W INC	40W INC	60W INC	60W INC
Dimming Compatible	Yes	Yes	Yes	Yes
Lumen Maintenance (L70)	15,000 hours	15,000 hours	15,000 hours	15,000 hours
LISTINGS	cULus	cULus	cULus	cULus

LED Enclosed Rated Frosted Filament Lamps



CCTs Available:

2700K

3000K

5000K



	A19 (E26 BASE)	A19 (E26 BASE)	A21 (E26 BASE)
MODEL NUMBER	EFF4.5A19D27*	EFF10A19D27	EFF13A21D27
ORDER CODE	14101717	14101720	14101723
Input Wattage	4.5W	10W	13W
Voltage	120V	120V	120V
Delivered Lumens (lm)	450 lm	1,100 lm	1,600 lm
Efficacy (lm/W)	100 lm/W	110 lm/W	123 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	2700K	2700K	2700K
Replacement	40W INC	75W INC	100W INC
Dimming Compatible	Yes	Yes	Yes
Lumen Maintenance (L70)	15,000 hours	15,000 hours	15,000 hours
LISTINGS	cULus	cULus	cULus

3000K and 5000K options.

LED Enclosed Rated JA8 Certified Frosted Filament Lamps



CCTs Available:

2700K

3000K



	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	EFF8.5A19D927/JA8	EFF8.5A19D930/JA8
ORDER CODE	101150	102434
Input Wattage	8.5W	8.5W
Voltage	120V	120V
Delivered Lumens (lm)	800 lm	800 lm
Efficacy (lm/W)	94 lm/W	94 lm/W
Color Rendering Index (CRI)	90	90
Color Temperature (CCT)	2700K	3000K
Replacement	60W INC	60W INC
Dimming Compatible	Yes	Yes
Lumen Maintenance (L70)	15,000 hours	15,000 hours
LISTINGS	cULus, ENERGY STAR®, T20, JA8	cULus, ENERGY STAR®, T20, JA8

LED Filament Lamps



CCTs Available:

2700K

	CLEAR (E26 BASE)	FROSTED (E26 BASE)
MODEL NUMBER	F2S14ND27	FF2S14ND27
ORDER CODE	101418	101425
Input Wattage	2W	2W
Voltage	120V	120V
Delivered Lumens (lm)	180 lm	160 lm
Efficacy (lm/W)	90 lm/W	80 lm/W
Color Rendering Index (CRI)	80	80
Color Temperature (CCT)	2700K	2700K
Replacement	11W INC	11W INC
Dimming Compatible	No	No
Lumen Maintenance (L70)	15,000 hours	15,000 hours
LISTINGS	cULus	cULus

LED Enclosed Rated Filament Lamps



	T12 FROSTED (GU24 BASE)	T12 FROSTED (E26 BASE)	T12 CLEAR (E26 BASE)
MODEL NUMBER	EFF8.5T12GD927/JA8	EFF8.5T12D927/JA8*	EF8.5T12D927/JA8*
ORDER CODE	101318	103044	101335
Input Wattage	8.5W	8.5W	8.5W
Voltage	120V	120V	120V
Delivered Lumens (lm)	800 lm	800 lm	800 lm
Efficacy (lm/W)	94 lm/W	94 lm/W	94 lm/W
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2700K	2700K	2700K
Replacement	60W INC	60W INC	60W INC
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	11,000 hours	11,000 hours	11,000 hours
LISTINGS	cULus Listed, T20, JA8	cULus Listed, T20, JA8	cULus Listed, T20, JA8

2700K and 3000K options.

LED Omni-Directional Dimmable Enclosed Rated A-Lamps



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	E6A19DLED27/G8	E9A19DLED27/G8*	E11A19DLED27/G8	E15A19DLED27/G8*
ORDER CODE	14099390	14099394	14099399	14099402
Input Wattage	6W	9W	11W	15W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	480 lm	800 lm	1,100 lm	1,600 lm
Efficacy (lm/W)	80 lm/W	89 lm/W	100 lm/W	106 lm/W
Color Rendering Index (CRI)	82	82	84	83
Color Temperature (CCT)	2700K	2700K	2700K	2700K
Replacement	40W INC	60W INC	75W INC	100W INC
Dimming Compatible	Yes	Yes	Yes	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours	25,000 hours
LISTINGS	ENERGY STAR®		ENERGY STAR®	

*These models are no longer Energy Star listed

LED Omni-Directional Dimmable Enclosed Rated A-Lamps



CCTs Available:



	A19 (GU24 BASE)	A19 (GU24 BASE)	A19 (GU24 BASE)	A19 (GU24 BASE)
MODEL NUMBER	E6A19GUDLED27/G8S	E9A19GUDLED27/G8S	E11A19GUDLED27/G8S	E15A19GUDLED27/G8S
ORDER CODE	14099405	14099408	14099411	14099414
Input Wattage	6W	9W	11W	15W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	480 lm	800 lm	1,100 lm	1,600 lm
Efficacy (lm/W)	80 lm/W	89 lm/W	100 lm/W	106 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	2700K	2700K	2700K	2700K
Replacement	40W INC	60W INC	75W INC	100W INC
Dimming Compatible	Yes	Yes	Yes	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours	25,000 hours
LISTINGS	ENERGY STAR®		ENERGY STAR®	

LED Omni-Directional Dimmable JA8 Certified Enclosed Rated A-Lamps



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	E5A19D927/JA8S	E9A19D927/JA8S	E11A19D927/JA8S	E15A19D927/JA8S
ORDER CODE	105472	105475	105481	105484
Input Wattage	5W	9W	11W	15W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	450 lm	810 lm	1,100 lm	1,600 lm
Efficacy (lm/W)	x lm/W	x lm/W	x lm/W	x lm/W
Color Rendering Index (CRI)	90	90	90	90
Color Temperature (CCT)	2700K	2700K	2700K	2700K
Replacement	40W INC	60W INC	75W INC	100W INC
Dimming Compatible	Yes	Yes	Yes	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours	25,000 hours
LISTINGS	ENERGY STAR®, T20, JA8	ENERGY STAR®, T20, JA8	ENERGY STAR®, T20, JA8	ENERGY STAR®, T20, JA8

LED High Output Dimmable Omni-Directional A-Lamps



CCTs Available:



	A21 (E26 BASE)	A21 (E26 BASE)	A23 (E26 BASE)
MODEL NUMBER	17A21D27	21A21D27	26A23D27
ORDER CODE	102721	102717	102713
Input Wattage	17W	21W	26W
Voltage	120V	120V	120V
Delivered Lumens (lm)	2,000 lm	2,600 lm	3,000 - 3,200 lm
Efficacy (lm/W)	118 lm/W	123 lm/W	123 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80
Color Temperature (CCT)	2700K	2700K	2700K
Replacement	125W INC	150W INC	200W INC
Dimming Compatible	Triac	Triac	Triac
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours
LISTINGS	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®

LED High Output Non-Dimmable Omni-Directional Lamps



CCTs Available:



	A21 (E26 BASE)	A21 (E26 BASE)	S25 (E26 BASE)
MODEL NUMBER	E16.5A21ND27	E20A21ND30	E24PS25ND30
ORDER CODE	105249	105253	105256
Input Wattage	16.5W	20W	24W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,000 lm	2,600 lm	3,200 lm
Efficacy (lm/W)	118 lm/W	130 lm/W	133 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	2700K	3000K	3000K
Replacement	125W INC	150W INC	200W INC
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours
LISTINGS	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®

LED Rough Service Non-Dimmable Omni-Directional A-Lamps



CCTs Available:

3000K

	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	E9A19NDV30RS	E14A19NDV30RS
ORDER CODE	102611	102406
Input Wattage	9W	14W
Voltage	120V	120V
Delivered Lumens (lm)	800 lm	1,500 lm
Efficacy (lm/W)	89 lm/W	107 lm/W
Color Rendering Index (CRI)	≥80	≥80
Color Temperature (CCT)	3000K	3000K
Replacement	60W INC	100W INC
Dimming Compatible	No	No
Lumen Maintenance (L70)	11,000 hours	11,000 hours
LISTINGS	cULus	cULus

LED Value Non-Dimmable Omni-Directional A-Lamps



CCTs Available:

2700K

3000K

4000K

5000K

	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	E6A19NDV27	E9A19NDV27	E11A19NDV27	E14A19NDV27
ORDER CODE	102600	102604	102575	102578
Input Wattage	6W	9W	11W	14W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	450 lm	800 lm	1,100 lm	1,500 lm
Efficacy (lm/W)	75 lm/W	89 lm/W	100 lm/W	107 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	2700K	2700K	2700K	2700K
Replacement	40W INC	60W INC	75W INC	100W INC
Dimming Compatible	No	No	No	No
Lumen Maintenance (L70)	11,000 hours	11,000 hours	11,000 hours	11,000 hours
LISTINGS	cULus	cULus	cULus	cULus

LED Omni-Directional 3-Way A-Lamps



CCTs Available:

2700K

3000K

5000K

	A21 (E26 BASE)	A21 (E26 BASE)
MODEL NUMBER	15A21/3WLED927	21A21/3W27
ORDER CODE	14098774	14102107
Input Wattage	15W	21W
Voltage	120V	120V
Delivered Lumens (lm)	500/1,000/1,500 lm	620/1,600/2,150 lm
Efficacy (lm/W)	> 100 lm/W	89/107/103 lm/W
Color Rendering Index (CRI)	91	80
Color Temperature (CCT)	2700K	2700K
Replacement	40/60/100W INC	50W/100W/150W INC
Dimming Compatible	No	No
Lumen Maintenance (L70)	25,000 hours	25,000 hours
LISTINGS	ENERGY STAR®, T20	cULus, ENERGY STAR®

LED Globe Lamps



CCTs Available:

2700K

3000K

	G16 (E12 BASE)	G40 (E26 BASE)
MODEL NUMBER	5G16.5DLED27/G2	12G40DLED302
ORDER CODE	103008	1410218
Input Wattage	5W	12W
Voltage	120	120V
Delivered Lumens (lm)	350 lm	950 lm
Efficacy (lm/W)	70 lm/W	79 lm/W
Color Rendering Index (CRI)	82	83
Color Temperature (CCT)	2700K	3000K
Replacement	40W INC	100W INC
Dimming Compatible	Yes	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours
LISTINGS	ENERGY STAR®	ENERGY STAR®

LED JA8 Certified
Globe Lamp

CCTs Available:

2700K

	G25 (E26 BASE)
MODEL NUMBER	10G25DLED927/JA8
ORDER CODE	1409460
Input Wattage	10W
Voltage	120V
Delivered Lumens (lm)	800 lm
Efficacy (lm/W)	80 lm/W
Color Rendering Index (CRI)	92
Color Temperature (CCT)	2700K
Replacement	100W INC
Dimming Compatible	Yes
Lumen Maintenance (L70)	25,000 hours
LISTINGS	cULus, ENERGY STAR®, JA8 CEC 3.0

LED PL DirectFit Ballast
Compatible Retrofit Lamps
w/ Selectable CCT
(UL-A)

CCTs Available:

3000K

3500K

4000K



	HORIZONTAL PL (G24q BASE)	VERTICAL PL (G24q BASE)
MODEL NUMBER	9PLG24QHCS	9PLG24QVCS
ORDER CODE	104733	104734
Input Wattage	9W	9W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	1,025/1,050/1,100 lm	1,025/1,050/1,100 lm
Efficacy (lm/W)	93/95/100 lm/W	93/95/100 lm/W
Color Rendering Index (CRI)	80	80
Color Temperature (CCT)	3000/3500/4000K	3000/3500/4000K
Replacement	18/26 CFL	18/26 CFL
Dimming Compatible	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	cULus, DLC	cULus, DLC

LED PL Retrofit Lamps w/ Selectable CCT (UL-B)



CCTs Available:



	E26 BASE	G24Q BASE	GU24 BASE	GX23 BASE
MODEL NUMBER	6PLE26CS	6PLG24QCS	6PLGU24CS	6PLGX23CS
ORDER CODE	104735	104736	104737	104738
Input Wattage	6W	6W	6W	6W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	550/575/600/625 lm	550/575/600/625 lm	550/575/600/625 lm	550/575/600/625 lm
Efficacy (lm/W)	92/96/100/104 lm/W	92/96/100/104 lm/W	92/96/100/104 lm/W	92/96/100/104 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	2700/3000/3500/ 4000/5000K	2700/3000/3500/ 4000/5000K	2700/3000/3500/ 4000/5000K	2700/3000/3500/ 4000/5000K
Replacement	9W CFL	9W CFL	9W CFL	9W CFL
Dimming Compatible	No	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus	cULus	cULus	cULus

LED PL Retrofit Lamps w/ Selectable CCT (UL-B)



CCTs Available:



	E26 BASE	G24Q BASE	GU24 BASE	GX23 BASE
MODEL NUMBER	8PLE26CS	8PLG24QCS	8PLGU24CS	8PLGX23CS
ORDER CODE	104739	104740	104741	104742
Input Wattage	8W	8W	8W	8W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	950/975/1,000/1,050 lm	950/975/1,000/1,050 lm	950/975/1,000/1,050 lm	950/975/1,000/1,050 lm
Efficacy (lm/W)	119/122/125/131 lm/W	119/122/125/131 lm/W	119/122/125/131 lm/W	119/122/125/131 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	2700/3000/3500/ 4000/5000K	2700/3000/3500/ 4000/5000K	2700/3000/3500/ 4000/5000K	2700/3000/3500/ 4000/5000K
Replacement	13W CFL	13W CFL	13W CFL	13W CFL
Dimming Compatible	No	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus	cULus	cULus	cULus

LED PL Retrofit Lamps w/ Selectable CCT (UL-B)



CCTs Available:



	E26 BASE	G24Q BASE	GU24 BASE	GX23 BASE
MODEL NUMBER	11PLE26CS	11PLG24QCS	11PLGU24CS	11PLGX23CS
ORDER CODE	104743	104744	104745	104746
Input Wattage	11W	11W	11W	11W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,400/1,425/1,450/1,500 lm	1,400/1,425/1,450/1,500 lm	1,400/1,425/1,450/1,500 lm	1,400/1,425/1,450/1,500 lm
Efficacy (lm/W)	127/130/132/136 lm/W	127/130/132/136 lm/W	127/130/132/136 lm/W	127/130/132/136 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	2700/3000/3500/ 4000/5000K	2700/3000/3500/ 4000/5000K	2700/3000/3500/ 4000/5000K	2700/3000/3500/ 4000/5000K
Replacement	26W CFL	26W CFL	26W CFL	26W CFL
Dimming Compatible	No	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus	cULus	cULus	cULus

LED G4 & Wedge Retrofit Lamps



CCTs Available:

2700K



12V (WEDGE BASE)

MODEL NUMBER	2.5WDGLED27
ORDER CODE	74108
Input Wattage	2.5W
Voltage	12V AC/DC
Delivered Lumens (lm)	180 lm
Efficacy (lm/W)	72 lm/W
Color Rendering Index (CRI)	80
Color Temperature (CCT)	2700K
Replacement	20W HAL
Dimming Compatible	No
Lumen Maintenance (L70)	25,000 hours
LISTINGS	TUV

LED G9 Retrofit Lamps



CCTs Available:

2700K



	NON-DIM (G9 BASE)	DIM (G9 BASE)	NON-DIM (G9 BASE)	DIM (G9 BASE)
MODEL NUMBER	3G9LED27	3G9DLED27	5G9LED27	5G9DLED27
ORDER CODE	108071	108072	108073	108074
Input Wattage	3W	3W	5W	5W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	270 lm	270 lm	480 lm	360 lm
Efficacy (lm/W)	90 lm/W	90 lm/W	96 lm/W	72 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	2700K	2700K	2700K	2700K
Replacement	25W INC	25W INC	40W INC	40W INC
Dimming Compatible	No	Yes	No	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours	25,000 hours
LISTINGS	TUV	TUV	TUV	TUV

LED MR16 Lamps



CCTs Available:

2700K

3000K



	MR16 (GU10 BASE)	MR16 (GU10 BASE)
MODEL NUMBER	4.5MR16GUD27FL	7MR16GUD27FL
ORDER CODE	14099068	14099072
Input Wattage	4.5W	7W
Voltage	120V	120V
Delivered Lumens (lm)	315 lm	500 lm
Efficacy (lm/W)	70 lm/W	71 lm/W
Color Rendering Index (CRI)	83	82
Color Temperature (CCT)	2700K	2700K
Replacement	35W INC	50W INC
Beam Angle	40°	40°
CBCP (cd)	739 cd	554 cd
Dimming Compatible	Yes	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours
LISTINGS	cULus, ENERGY STAR®	cULus, ENERGY STAR®

LED MR16 Lamps



CCTs Available:

2700K 3000K



	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)
MODEL NUMBER	6MR16D927SP15/JA8	6MR16D927NF25/JA8	6MR16D927FL35/JA8
ORDER CODE	103927	103929	103932
Input Wattage	6W	6W	6W
Voltage	12V AC	12V AC	12V AC
Delivered Lumens (lm)	440 lm	440 lm	440 lm
Efficacy (lm/W)	73 lm/W	73 lm/W	73 lm/W
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2700K	2700K	2700K
Replacement	35W INC	35W INC	35W INC
Beam Angle	15°	25°	35°
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours
LISTINGS	cULus, ENERGY STAR®, T20, JA8	cULus, ENERGY STAR®, T20, JA8	cULus, ENERGY STAR®, T20, JA8

LED MR16 Lamps



CCTs Available:

2700K 3000K



	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)
MODEL NUMBER	8MR16D5927SP15/JA8	8MR16D5927NF25/JA8	8MR16D5927FL35/JA8
ORDER CODE	103951	103953	103956
Input Wattage	8W	8W	8W
Voltage	12V AC	12V AC	12V AC
Delivered Lumens (lm)	580 lm	580 lm	580 lm
Efficacy (lm/W)	73 lm/W	73 lm/W	73 lm/W
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2700K	2700K	2700K
Replacement	50W INC	50W INC	50W INC
Beam Angle	15°	25°	35°
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours
LISTINGS	cULus, ENERGY STAR®, T20, JA8	cULus, ENERGY STAR®, T20, JA8	cULus, ENERGY STAR®, T20, JA8

LED MR16 Lamps



CCTs Available:

2700K 3000K



	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)
MODEL NUMBER	8MR16D7927SP15/JA8	8MR16D7927NF25/JA8	8MR16D7927FL35/JA8
ORDER CODE	103958	103961	103963
Input Wattage	8W	8W	8W
Voltage	12V AC	12V AC	12V AC
Delivered Lumens (lm)	595 lm	595 lm	595 lm
Efficacy (lm/W)	74 lm/W	74 lm/W	74 lm/W
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2700K	2700K	2700K
Replacement	75W INC	50W INC	50W INC
Beam Angle	15°	25°	35°
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours
LISTINGS	cULus, ENERGY STAR®, T20, JA8	cULus, ENERGY STAR®, T20, JA8	cULus, ENERGY STAR®, T20, JA8

LED BR Lamps



CCTs Available:



	BR20 (E26 BASE)	BR30 (E26 BASE)	BR30 (E26 BASE)	BR40 (E26 BASE)	BR40 (E26 BASE)
MODEL NUMBER	7BR20DLED27/G3	8BR30DLED27/G3	11BR30DLED27/G3	12BR40DLED27/G3	17BR40DLED27/G3
ORDER CODE	14099046	14099049	14099421	14099052	14099418
Input Wattage	7W	8W	11W	12W	17W
Voltage	120V	120V	120V	120V	120V
Delivered Lumens (lm)	550 lm	650 lm	850 lm	1,050 lm	1,400 lm
Efficacy (lm/W)	78 lm/W	81 lm/W	77 lm/W	88 lm/W	82 lm/W
Color Rendering Index (CRI)	80	84	83	82	82
Color Temperature (CCT)	2700K	2700K	2700K	2700K	2700K
Replacement	50W INC	65W INC	65W INC	75W INC	100W INC
Dimming Compatible	Yes	Yes	Yes	Yes	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours	25,000 hours	25,000 hours
LISTINGS	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®

3000K and 4000K options also available.

LED T20 BR Lamps



CCTs Available:



	BR30 (E26 BASE)	BR30 (E26 BASE)
MODEL NUMBER	11BR30DLED927/G4	11BR30DLED930/G4
ORDER CODE	107608	107609
Input Wattage	11W	11W
Voltage	120V	120V
Delivered Lumens (lm)	800 lm	800 lm
Efficacy (lm/W)	72 lm/W	72 lm/W
Color Rendering Index (CRI)	92	92
Color Temperature (CCT)	2700K	3000K
Replacement	65W INC	65W INC
Dimming Compatible	Yes	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours
LISTINGS	cULus, ENERGY STAR®	cULus, ENERGY STAR®

LED Value Dimmable BR Lamps



CCTs Available:



	R20 (E26 BASE)	BR30 (E26 BASE)	BR40 (E26 BASE)
MODEL NUMBER	6R20DV27	8BR30DV27	13BR40DV27
ORDER CODE	102574	102620	102630
Input Wattage	6W	8W	13W
Voltage	120V	120V	120V
Delivered Lumens (lm)	325 lm	650 lm	900 lm
Efficacy (lm/W)	54 lm/W	81 lm/W	69 lm/W
Color Rendering Index (CRI)	≥82	≥82	≥82
Color Temperature (CCT)	2700K	2700K	2700K
Replacement	35W INC	65W INC	85W INC
Dimming Compatible	Triac	Triac	Triac
Lumen Maintenance (L70)	11,000 hours	11,000 hours	11,000 hours
LISTINGS	cULus	cULus	cULus

LED PAR Lamps



CCTs Available:

2700K 3000K 4000K



	PAR20 (E26 BASE)	PAR30 SHORT (E26 BASE)	PAR30 LONG (E26 BASE)	PAR38 (E26 BASE)	PAR38 (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	7P20WD27FL	11P30D27FL	11P30WLND27FL	13P38WD27FL	13P38WD27NF	15P38WD27FL
ORDER CODE	14099200	14099226	14099203	14099206	14099219	14099210
Input Wattage	7W	11W	11W	13W	13W	15W
Voltage	120V	120V	120V	120V	120V	120V
Delivered Lumens (lm)	500 lm	850 lm	850 lm	1,050 lm	1,050 lm	1,250 lm
Efficacy (lm/W)	71 lm/W	77 lm/W	77 lm/W	80 lm/W	80 lm/W	83 lm/W
Color Rendering Index (CRI)	83	83	83	80	80	83
Color Temperature (CCT)	2700K	2700K	2700K	2700K	2700K	2700K
Replacement	50W INC	75W INC	75W INC	100W INC	100W INC	120W INC
Beam Angle	40°	40°	40°	40°	30°	40°
Dimming Compatible	Yes	Yes	Yes	No	No	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours	25,000 hours	25,000 hours	25,000 hours
LISTINGS	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®

LED JA8 Certified
PAR Lamps

CCTs Available:

2700K 3000K



	PAR16 (E26 BASE)	PAR20 (E26 BASE)	PAR30 SHORT NECK (E26 BASE)	PAR30 LONG NECK (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	6P16D927FL/JA8	6.5P20D927FL/JA8	11P30D927FL/JA8	11P30LND927FL/JA8	14P38D927FL/JA8
ORDER CODE	14101679	14101681	14101683	14101685	14101687
Input Wattage	6W	6.5W	11W	11W	14W
Voltage	120V	120V	120V	120V	120V
Delivered Lumens (lm)	500 lm	575 lm	975 lm	975 lm	1,250 lm
Efficacy (lm/W)	83 lm/W	88 lm/W	88 lm/W	88 lm/W	89 lm/W
Color Rendering Index (CRI)	90	90	90	90	90
Color Temperature (CCT)	2700K	2700K	2700K	2700K	2700K
Replacement	50W INC	50W INC	75W INC	75W INC	100W INC
Dimming Compatible	Yes	Yes	Yes	Yes	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours	25,000 hours	25,000 hours
LISTINGS	cULus, T20, JA8 ENERGY STAR®	cULus, T20, JA8 ENERGY STAR®	cULus, T20, JA8 ENERGY STAR®	cULus, T20, JA8 ENERGY STAR®	cULus, T20, JA8 ENERGY STAR®

LED 277V PAR Lamps



CCTs Available:

3000K 4000K



	277V PAR30 LONG NECK (E26 BASE)	277V PAR38 (E26 BASE)
MODEL NUMBER	13P30LNLED230FL	17P38LED230FL
ORDER CODE	74686	74687
Input Wattage	13W	17W
Voltage	277V	277V
Delivered Lumens (lm)	1,000 lm	1,700 lm
Efficacy (lm/W)	77 lm/W	100 lm/W
Color Rendering Index (CRI)	82	82
Color Temperature (CCT)	3000K	3000K
Replacement	90W	120W
Dimming Compatible	No	No
Lumen Maintenance (L70)	25,000 hours	25,000 hours
LISTINGS	cRUus	cRUus

LED High Output Wet Rated PAR Lamps



Additional beam angles available.

CCTs Available:

3000K

4000K



	PAR30 (E26 BASE)	PAR30 (E26 BASE)	PAR38 (E26 BASE)	PAR38 (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	18P30WD30SP	20P30WD30NF	23P38WD30FL	23P38WD30SP	27P38WD30NF
ORDER CODE	102755	102756	102758	102757	102759
Input Wattage	18W	20W	23W	23W	27W
Voltage	120-277V	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,800 lm	2,300 lm	2,650 lm	2,650 lm	3,000 lm
Efficacy (lm/W)	100 lm/W	116 lm/W	115 lm/W	110 lm/W	105 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80	≥80
Color Temperature (CCT)	3000K	3000K	3000K	3000K	3000K
Replacement	75W INC	75W INC	250W HAL	250W HAL	250W HAL
Beam Angle	15°, Spot	25°, Narrow Flood	40°, Flood	15°, Spot	25°, Narrow Flood
Dimming Compatible	Yes	Yes	Yes	Yes	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours	25,000 hours	25,000 hours	25,000 hours
LISTINGS	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®	cULus, ENERGY STAR®

LED High Output Wet Rated PAR Lamps



CCTs Available:

3000K

4000K



	PAR38 (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	38P38WND30FL	38P38WND30NF
ORDER CODE	102629	102742
Input Wattage	38W	38W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	4,000 lm	4,000 lm
Efficacy (lm/W)	105 lm/W	105 lm/W
Color Rendering Index (CRI)	≥80	≥80
Color Temperature (CCT)	3000K	3000K
Replacement	250W HAL	250W HAL
Beam Angle	40°, Flood	25°, Narrow Flood
Dimming Compatible	Yes	Yes
Lumen Maintenance (L70)	25,000 hours	25,000 hours
LISTINGS	cULus, ENERGY STAR®	cULus, ENERGY STAR®

LED Value Non-Dimmable PAR Lamps



CCTs Available:

3000K

5000K



	PAR20 (E26 BASE)	PAR30 (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	7P20NDV30FL	10P30NDV30FL	13P38NDV30FL
ORDER CODE	102646	102648	102650
Input Wattage	7W	10W	13W
Voltage	120V	120V	120V
Delivered Lumens (lm)	425 lm	750 lm	1,000 lm
Efficacy (lm/W)	60 lm/W	75 lm/W	76 lm/W
Color Rendering Index (CRI)	≥82	≥82	≥82
Color Temperature (CCT)	3000K	3000K	3000K
Replacement	50W INC	65W INC	90W INC
Beam Angle	40°, Flood	40°, Flood	40°, Flood
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	11,000 hours	11,000 hours	11,000 hours
LISTINGS	cULus	cULus	cULus

LED DirectFit T8 U-Bend Lamp (UL-A)



CCTs Available:

3500K 4000K 5000K

T8 U-BEND (G13 PIN BASE)

MODEL NUMBER	U13T8DF235
ORDER CODE	1409015
Input Wattage	13W (Bare Lamp)
Voltage	(Ballast Dependent)
Delivered Lumens (lm)	1,800 lm
Color Rendering Index (CRI)	85
Color Temperature (CCT)	3500K
Replacement	32W FLUOR
Dimming Compatible	No
Lumen Maintenance (L70)	50,000 hours
LISTINGS	cULus, DLC

4000K & 5000K options also available.

LED DirectFit T8 Linear Lamps (UL-A)



CCTs Available:

3500K 4000K 5000K

	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L9.5T8DF435-CG	L9.5T8DF440-CG	L9.5T8DF450-CG
ORDER CODE	14099192	14099190	14091991
Input Wattage	9.5W (Bare Lamp)	9.5W (Bare Lamp)	9.5W (Bare Lamp)
Voltage	(Ballast Dependent)	(Ballast Dependent)	(Ballast Dependent)
Delivered Lumens (lm)	1,700 lm	1,700 lm	1,800 lm
Efficacy (lm/W)	131 lm/W	138 lm/W	138 lm/W
Color Rendering Index (CRI)	82	82	82
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	32W FLUOR	32W FLUOR	32W FLUOR
Dimming Compatible	Yes (Ballast Dependent)	Yes (Ballast Dependent)	Yes (Ballast Dependent)
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus, ETL Sanitation, DLC	cULus, ETL Sanitation, DLC	cULus, ETL Sanitation, DLC

LED DirectFit T8 Linear Lamps (UL-A)



CCTs Available:

3500K 4000K 5000K

	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L13T8DF435-CG5	L13T8DF440-CG5	L13T8DF450-CG5
ORDER CODE	14098818	14098819	107223
Input Wattage	13W (Bare Lamp)	13W (Bare Lamp)	13W (Bare Lamp)
Voltage	(Ballast Dependent)	(Ballast Dependent)	(Ballast Dependent)
Delivered Lumens (lm)	1,800 lm	1,850 lm	1,900 lm
Efficacy (lm/W)	116 lm/W	116 lm/W	119 lm/W
Color Rendering Index (CRI)	83	83	83
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	32W FLUOR	32W FLUOR	32W FLUOR
Dimming Compatible	Yes (Ballast Dependent)	Yes (Ballast Dependent)	Yes (Ballast Dependent)
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus, ETL Sanitation, DLC	cULus, ETL Sanitation, DLC	cULus, ETL Sanitation, DLC

LED DirectFit T8 Linear Lamps (UL-A)



CCTs Available:



4' T8 (GLASS, G13 PIN BASE)

4' T8 (GLASS, G13 PIN BASE)

MODEL NUMBER	L10.5T8DF440-GA	L14T8DF440-GA2
ORDER CODE	103331	103334
Input Wattage	10.5W (Bare Lamp)	14.5W (Bare Lamp)
Voltage	(Ballast Dependent)	(Ballast Dependent)
Delivered Lumens (lm)	1,800 lm	2,200 lm
Efficacy (lm/W)	138 lm/W	129 lm/W
Color Rendering Index (CRI)	80	80
Color Temperature (CCT)	4000K	4000K
Replacement	32W FLUOR	32W FLUOR
Dimming Compatible	Yes (Ballast Dependent)	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	cULus, DLC	cULus, DLC

LED DirectFit T5 Linear Lamps (UL-A)



CCTs Available:

4' T5
(COATED GLASS, G5 PIN BASE)

MODEL NUMBER	L25T5DF435-CG5
ORDER CODE	1409171
Input Wattage	25W (Bare Lamp)
Voltage	(Ballast Dependent)
Delivered Lumens (lm)	3,200 lm
Efficacy (lm/W)	116 lm/W
Color Rendering Index (CRI)	83
Color Temperature (CCT)	3500K
Replacement	54W T5HO
Dimming Compatible	No
Lumen Maintenance (L70)	50,000 hours
LISTINGS	cULus, ETL Sanitation, DLC

LED Internal Driver T8 U-Bend Lamps (UL-B)



CCTs Available:

T8 U-BEND
(PLASTIC, G13 PIN BASE)T8 U-BEND
(PLASTIC, G13 PIN BASE)T8 U-BEND
(PLASTIC, G13 PIN BASE)

MODEL NUMBER	U15.5T8SE235	U15.5T8SE240	U15.5T8SE250
ORDER CODE	1409561	1409562	1409563
Input Wattage	15.5W	15.5W	15.5W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,800 lm	1,850 lm	1,900 lm
Efficacy (lm/W)	116 lm/W	119 lm/W	123 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	32W FLUOR	32W FLUOR	32W FLUOR
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	UL Classified, rUL, DLC	UL Classified, rUL, DLC	UL Classified, rUL, DLC

LED Internal Driver T8 Single-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L9T8SE435-CG	L9T8SE440-CG	L9T8SE450-CG
ORDER CODE	105011	105012	105013
Input Wattage	9W	9W	9W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1600 lm	1625 lm	1625 lm
Efficacy (lm/W)	174 lm/W	177 lm/W	177 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	32W FLUOR	32W FLUOR	32W FLUOR
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	UL Classfield	UL Classfield	UL Classfield

LED Internal Driver T8 Single-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L10.5T8SE435-CG	L10.5T8SE440-CG	L10.5T8SE450-CG
ORDER CODE	14099194	14099195	10499196
Input Wattage	10W	10W	10W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1600 lm	1650 lm	1650 lm
Efficacy (lm/W)	152 lm/W	157 lm/W	157 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	32W FLUOR	32W FLUOR	32W FLUOR
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	UL Classfield, DLC	UL Classfield, DLC	UL Classfield, DLC

LED Internal Driver T8 Single-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L12.5T8SE435-CG	L12.5T8SE440-CG	L12.5T8SE450-CG
ORDER CODE	14098989	14098990	1098991
Input Wattage	12W	12W	12W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1650 lm	1750 lm	1800 lm
Efficacy (lm/W)	132 lm/W	140 lm/W	144 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	32W FLUOR	32W FLUOR	32W FLUOR
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	UL Classfield, DLC	UL Classfield, DLC	UL Classfield, DLC

LED Internal Driver T8 Single-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L16.5T8SE435-CG	L16.5T8SE440-CG	L16.5T8SE450-CG
ORDER CODE	14098994	14098995	14098996
Input Wattage	16.5W	16.5W	16.5W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2200 lm	2300 lm	2400 lm
Efficacy (lm/W)	133 lm/W	139 lm/W	145 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	32W FLUOR	32W FLUOR	32W FLUOR
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	UL Classified, DLC	UL Classified, DLC	UL Classified, DLC

LED Internal Driver T8 Single-Ended or Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	2' T8 (COATED GLASS, G13 PIN BASE)	2' T8 (COATED GLASS, G13 PIN BASE)	2' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L9T8DE235-CG4	L9T8DE240-CG4	L9T8DE250-CG4
ORDER CODE	1409552	1409553	1409554
Input Wattage	9W	9W	9W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,125 lm	1,200 lm	1,250 lm
Efficacy (lm/W)	125 lm/W	133 lm/W	139 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	17W FLUOR	17W FLUOR	17W FLUOR
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	UL Classified, ETL, DLC	UL Classified, ETL, DLC	UL Classified, ETL, DLC

LED Internal Driver T8 Single-Ended or Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	3' T8 (COATED GLASS, G13 PIN BASE)	3' T8 (COATED GLASS, G13 PIN BASE)	3' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L12T8DE335-CG4	L12T8DE340-CG4	L12T8DE350-CG4
ORDER CODE	1409555	1409556	1409557
Input Wattage	12W	12W	12W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,225 lm	1,250 lm	1,300 lm
Efficacy (lm/W)	102 lm/W	104 lm/W	108 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	25W FLUOR	25W FLUOR	25W FLUOR
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	UL Classified, ETL, DLC	UL Classified, ETL, DLC	UL Classified, ETL, DLC

LED Internal Driver T8 Single-Ended or Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L9.8T8DE435-CG	L9.8T8DE440-CG	L9.8T8DE450-CG
ORDER CODE	104709	104710	104711
Input Wattage	9.8W	9.8W	9.8W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,650 lm	1,675 lm	1,700 lm
Efficacy (lm/W)	168 lm/W	171 lm/W	173 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	32W FLUOR	32W FLUOR	32W FLUOR
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	UL Classified, ETL, DLC	UL Classified, ETL, DLC	UL Classified, ETL, DLC

LED Internal Driver T8 Single-Ended or Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	4' T8 (PLASTIC, G13 PIN BASE)	4' T8 (PLASTIC, G13 PIN BASE)	4' T8 (PLASTIC, G13 PIN BASE)	4' T8 (PLASTIC, G13 PIN BASE)
MODEL NUMBER	L10.5T8SDE430	L10.5T8SDE435	L10.5T8SDE440	L10.5T8SDE450
ORDER CODE	105655	105656	105657	106031
Input Wattage	10.5W	10.5W	10.5W	10.5W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,670 lm	1,679 lm	1,688 lm	1,705 lm
Efficacy (lm/W)	156 lm/W	156 lm/W	157 lm/W	158 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	3000K	3500K	4000K	5000K
Replacement	xW FLUOR	xW FLUOR	xW FLUOR	xW FLUOR
Dimming Compatible	No	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus Classfield	cULus Classfield	cULus Classfield	cULus Classfield

LED Internal Driver T8 Single-Ended or Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	4' T8 (GLASS, G13 PIN BASE)	4' T8 (GLASS, G13 PIN BASE)	4' T8 (GLASS, G13 PIN BASE)	4' T8 (GLASS, G13 PIN BASE)
MODEL NUMBER	L10.5T8SDE430-G	L10.5T8SDE435-G	L10.5T8SDE440-G	L10.5T8SDE450-G
ORDER CODE	106032	106033	106034	106035
Input Wattage	10.5W	10.5W	10.5W	10.5W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,709 lm	1,724 lm	1,738 lm	1,767 lm
Efficacy (lm/W)	162 lm/W	162 lm/W	163 lm/W	165 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	3000K	3500K	4000K	5000K
Replacement	xW FLUOR	xW FLUOR	xW FLUOR	xW FLUOR
Dimming Compatible	No	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus Classfield	cULus Classfield	cULus Classfield	cULus Classfield

LED Internal Driver
T8 Single-Ended or
Double-Ended Power
(UL-B) Ballast Bypass



CCTs Available:

3500K

4000K

5000K



	4' T8 (COATED GLASS, G5 PIN BASE)	4' T8 (COATED GLASS, G5 PIN BASE)	4' T8 (COATED GLASS, G5 PIN BASE)
MODEL NUMBER	L11.5T8DE435-CG4	L11.5T8DE440-CG4	L11.5T8DE450-CG4
ORDER CODE	1409558	1409559	1409560
Input Wattage	11.5W	11.5W	11.5W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,800 lm	1,800 lm	1,800 lm
Efficacy (lm/W)	156 lm/W	156 lm/W	156 lm/W
Color Rendering Index (CRI)	83	83	83
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	32W FLUOR	32W FLUOR	32W FLUOR
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	UL Classified, ETL Sanitation, DLC	UL Classified, ETL Sanitation, DLC	UL Classified, ETL Sanitation, DLC

Emergency Battery
Backup For Type-B
Linear Lamps



MODEL NUMBER	T8B-BBU
ORDER CODE	103546
Input Wattage	5W
Voltage	120-277V
LISTINGS	cULus, ETL Sanitation, DLC

LED External Driver Dimmable T8 Linear Lamps (UL-C)



CCTs Available:

3500K

4000K

5000K

	2' T8 (1-LAMP) (COATED, G13 PIN BASE)	3' T8 (2-LAMPS) (COATED, G13 PIN BASE)	4' T8 (1-LAMP) (COATED, G13 PIN BASE)	4' T8 (1-LAMP) (COATED, G13 PIN BASE)
MODEL NUMBER	L7.5T8EX240DR1L7.5	L11.5T8EX340DR2L11.5	L11.5T8EX440DR1L11.5	L13T8EX440DR1L13
ORDER CODE	105147	105153	105159	105165
Input Wattage	7.5W	11.5W	11.5W	13W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,150 lm	1,700 lm	1,800 lm	2,200 lm
Efficacy (lm/W)	128 lm/W	131 lm/W	138 lm/W	147 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	4000K	4000K	4000K	4000K
Replacement	17W FLUOR	25W FLUOR	32W FLUOR	32W FLUOR
Dimming Compatible	Yes	Yes	Yes	Yes
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus Classfield, DLC	cULus Classfield, DLC	cULus Classfield, DLC	cULus Classfield, DLC

Available in 1,2,3 and 4 kits lamps" CCT available in 3500K, 4000K and 5000K.

LED External Driver Dimmable T5 Linear Lamps (UL-C)



CCTs Available:

3500K

4000K

5000K

	2' T5 (1-LAMP) (COATED, G13 PIN BASE)	3' T5 (1-LAMP) (COATED, G13 PIN BASE)	4' T5 (1-LAMP) (COATED, G13 PIN BASE)
MODEL NUMBER	L13T5EX240DR1L13	L18T5EX340DR1L18	L25T5EX440DR1L25
ORDER CODE	105129	105135	105141
Input Wattage	13W	18W	25W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,600 lm	2,100 lm	3,300 lm
Efficacy (lm/W)	117 lm/W	123 lm/W	134 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	4000K	4000K	4000K
Replacement	24W FLUOR	39W FLUOR	54W FLUOR
Dimming Compatible	Yes	Yes	Yes
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus Classfield, DLC	cULus Classfield, DLC	cULus Classfield, DLC

Available in 1,2,3 and 4 kits lamps" CCT available in 3500K, 4000K and 5000K.

Emergency Battery Backup For Type-C Linear Lamps



MODEL NUMBER	T8C-BBU
ORDER CODE	103548
Input Wattage	7W
Voltage	120-277V
LISTINGS	cULus

LED External Driver U-Bend Linear Lamps (UL-C)



CCTs Available:



	T8 U-BEND (2-LAMPS) (COATED GLASS, G13 PIN BASE)	T8 U-BEND (2-LAMPS) (COATED GLASS, G13 PIN BASE)	T8 U-BEND (2-LAMPS) (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	U11.5T8EX235DR2L11.5	U11.5T8EX240DR2L11.5	U11.5T8EX250DR2L11.5
ORDER CODE	105058	105059	105060
Input Wattage	11.5W	11.5W	11.5W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,700 lm	1,750 lm	1,800 lm
Efficacy (lm/W)	131 lm/W	135 lm/W	138 lm/W
Color Rendering Index (CRI)	80	80	80
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	32W FLUOR	32W FLUOR	32W FLUOR
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus Classfield, DLC	cULus Classfield, DLC	cULus Classfield, DLC

LED Dual-Mode/Hybrid Series T8 Linear Lamps (UL-A+B)



CCTs Available:



	2' T8 (COATED GLASS, G13 PIN BASE)	3' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L9T8AB235-CG	L11T8AB335-CG	L12T8AB435-CG
ORDER CODE	102777	102771	102774
Input Wattage	9W	11W	12W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,350 lm	1,600 lm	1,800 lm
Efficacy (lm/W)	112 lm/W	114 lm/W	116 lm/W
Color Rendering Index (CRI)	83	83	83
Color Temperature (CCT)	3500K	3500K	3500K
Replacement	17W FLUOR	25W FLUOR	32W FLUOR
Dimming Compatible	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus, DLC	cULus, DLC	cULus, DLC

LED Single-End Powered T8 Wiring Harnesses



	1 LAMP WIRING HARNESS	2 LAMP WIRING HARNESS	3 LAMP WIRING HARNESS	4 LAMP WIRING HARNESS
MODEL NUMBER	G13KIT1	G13KIT2	G13KIT3	G13KIT4
ORDER CODE	1409026	1409027	1409028	1409029
Lamps Configuration	1	2	3	4

LED Single-End Powered T5 Wiring Harnesses



	1 LAMP WIRING HARNESS	2 LAMP WIRING HARNESS	4 LAMP WIRING HARNESS	6 LAMP WIRING HARNESS
MODEL NUMBER	G5KIT1	G5KIT2	G5KIT4	G5KIT6
ORDER CODE	14098784	14098785	14098786	14098787
Lamps Configuration	1	2	3	4

G13 U-Bend Bypass T8 Non-Shunted Lamp Holder



MODEL NUMBER	G13UNS
ORDER CODE	14098795

G13 Low Profile T8 Non-Shunted Lamp Holder



MODEL NUMBER	G13LPNS
ORDER CODE	73978

LED PLL Plug & Play Lamps



CCTs Available:



	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)
MODEL NUMBER	13PLLA30-CG	13PLLA35-CG	13PLLA40-CG	13PLLA50-CG
ORDER CODE	103366	14100784	14100785	103285
Input Wattage	13W	13W	13W	13W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,050 lm	2,050 lm	2,100 lm	2,100 lm
Efficacy (lm/W)	124 lm/W	124 lm/W	127 lm/W	130 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	3000K	3500K	4000K	5000K
Replacement	40W CFL	40W CFL	40W CFL	40W CFL
Dimming Compatible	No	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	UL Listed, FCC	UL Listed, FCC	UL Listed, FCC	UL Listed, FCC

LED PLL Bypass Lamps



CCTs Available:



	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)
MODEL NUMBER	17PLLB30-CG	17PLLB35-CG	17PLLB40-CG	17PLLB50-CG
ORDER CODE	103367	14100787	14100788	14100789
Input Wattage	17W	17W	17W	17W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,050 lm	2,150 lm	2,200 lm	2,200 lm
Efficacy (lm/W)	121 lm/W	127 lm/W	130 lm/W	130 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	3000K	3500K	4000K	5000K
Replacement	40W CFL	40W CFL	40W CFL	40W CFL
Dimming Compatible	No	No	No	No
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	UL Classified, UL UR, FCC	UL Classified, UL UR, FCC	UL Classified, UL UR, FCC	UL Classified, UL UR, FCC

LED High Bay Ballast Bypass Lamps



CCTs Available:

5000K



MODEL NUMBER	MOGUL BASE	MOGUL BASE
	E80MH850B	E115MH850B
ORDER CODE	104757	104759
Input Wattage	80W	115W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	10,800 lm	15,500 lm
Efficacy (lm/W)	140 lm/W	140 lm/W
Color Rendering Index (CRI)	80	80
Color Temperature (CCT)	5000K	5000K
Replacement	Yes	Yes
Lumen Maintenance (L70)	50,000 hours	50,000 hours
LISTINGS	cULus	cULus

LED Post Tops



CCTs Available:

4000K

5000K




MODEL NUMBER	POST TOP (E26 BASE)	POST TOP (E39 BASE)	POST TOP (E39 BASE)	POST TOP (E39 BASE)	POST TOP (E39 BASE)
	27PT50E26	36PT50EX39	45PT50EX39	54PT50EX39	100PT50EX39
ORDER CODE	14102034	14102036	14102038	14102040	14102042
Input Wattage	27W	36W	45W	54W	100W
Voltage	120V-277V	120V-277V	120V-277V	120V-277V	120V-277V
Delivered Lumens (lm)	3,900 lm	5,400 lm	6,750 lm	8,100 lm	15,000 lm
Efficacy (lm/W)	144 lm/W	150 lm/W	150 lm/W	150 lm/W	150 lm/W
Color Rendering Index (CRI)	82	82	82	82	82
Color Temperature (CCT)	5000K	5000K	5000K	5000K	5000K
Replacement	100W MH	150W MH	175W MH	200-250W MH	400W MH
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours
LISTINGS	cULus, FCC	cULus, DLC, FCC	cULus, DLC, FCC	cULus, DLC, FCC	cULus, DLC, FCC
PHOTOCELL SENSOR	DTDS-PT	MICROWAVE SENSOR	MS-PT	PIR SENSOR	PIR-PT
	103637		103638		103636





Easy As C-C-T!

MaxLite offers a complete range of products with field-selectable color temperatures (CCTs) - more options with fewer SKUs to stock and manage!



Benefits:

- Switches from warm to cool white light
- Saves space on shelves and job sites
- Reduces carrying costs
- Meets varied customer needs
- Flat Panels also wattage selectable
- DLC listed or Energy Star certified models
- Motion sensor, battery back-up available
- Photocell included on most Outdoor products



Why MaxLite?



BAA/TAA Portfolio



Horticulture




Utility Rebate\$



FULL LINE
LAMPS
FIXTURES
CONTROLS



5-Time
Partner
of the Year



**Lighting
Layouts**

In One
Business Day



Fewer SKUs
CCT/Wattage Selectable



**SPECIAL
PROJECTS**



Design Innovation

**DISTRIBUTOR
FOCUSED**




**Two-Day
Shipping**

**28+
YEARS**
of Experience

MaxLite Tools & Resources

YouTube Channel (MaxLiteNewsRoom)

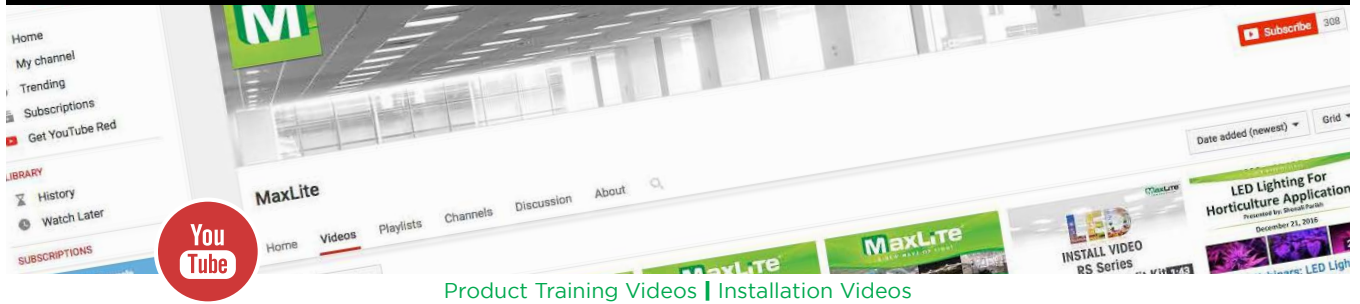

Social Media (Find, Like and Follow us on...)



MaxLite.com



Product Datasheets | Case Studies | Catalogs & Brochures | ROI Calculator | Utility Rebate Finder | ENERGY STAR

MaxLiteUniversity.com



Free online lighting degree program | Eligible for ALA Credit Hours

Product Specific Micro Sites



maxlite.com/Mpulse

www.quadromax.com

maxlite.com/Industrial

maxlite.com/hazloc



maxlite.com/Outdoor-Lighting



www.maxlite.com/PhotonMax/



A NEW WAVE OF LIGHT

www.maxlite.com

Find, like and follow us on social media.



A green square with the number "10" in white, "YEAR" in white, and "WARRANTY" in white below it.	Labor Included MaxLite offers a 10-year limited warranty on most LED indoor and outdoor fixtures. Go to MaxLite.com/warranties for applicable terms and conditions.
--	---

Item #
LEDGENCAT21

Ord. Code:
106088

Corporate Headquarters

12 York Ave.
West Caldwell, NJ 07006
T: 1-800-555-5629
F: 973-244-7333

Indiana Facility

998 Gerdt Court
Greenwood, IN 46143
T: 317-300-0130

California Facility

1148 North Ocean Circle
Anaheim, CA 92806
T: 1-800-793-1212
F: 714-678-5096