

Flat Panel



FlatMax™ MLFP G5 Flat Panels

1x4:	15W/20W/25W	
	2,100/2,800/3,500 lm	
		13W
2	15W/20W/25W	1,850 lm
	2,100/2,800/3,500 lm	
2x4:	22W/30W/38W	20W
	3,000/4,200/5,300 lm	2,800 lm



High Lumen Flat Panel

2x2:	30W/40W/50W	3,750/5,000/6,250 lms
2x4:	40W/50W/60W	5,000/6,250/7,500 lm



Troffers



ArcMax™ MLVT G2 Series Troffers

1x4:	13W/20W/26W	1,950/3,000/3,900 lm
	13W/20W/26W	1,950 lm
	13W/20W/26W	1,950 lm
2x2:	13W/20W/26W	1,950 lm
	13W/20W/26W	1,950 lm
2x4:	22W/28W/34W	19W
	3,300/4,200/5,100 lm	2,850 lm



Troffer Retrofit Kit



TRK G2 Series - Troffer Retrofit Kit

1x4:	13W/20W/26W	2,020/3,080/3,950 lm
	13W/20W/26W	13W
	13W/20W/26W	2,000 lm
2x2:	13W/20W/26W	2,000 lm
	13W/20W/26W	2,000 lm
2x4:	22W/28W/34W	19W
	3,430/4,310/5,160 lm	2,880 lm



Flat Panel Retrofit Kit



FPR Series - Panel Retrofit Kit

1x4:	15W/20W/25W	
	2,100/2,800/3,500 lm	
		13W
2x2:	15W/20W/25W	1,850 lm
	2,100/2,800/3,500 lm	
2x4:	22W/30W/38W	20W
	3,000/4,200/5,300 lm	2,850 lm



Wattages Below

RAD Series - Downlights

12W/16W/20W	18W/24W/30W	30W/40W/50W
990/1,350/1,640 lm	1,480/1,970/2,460 lm	2,460/3,280/4,100 lm



Using a patented, plug and play design, c-Max makes it easy to add luminaire-level lighting controls to achieve energy savings beyond LED conversion.



- Streamlined controls for essential needs
- Affordable in-fixture controls
- Commission via remote control



- Groupable wireless controls
- Easy Commissioning - No app required
- Efficient, powerful, yet affordable



- Bluetooth wireless NLC/LLLC solution
- Commission devices without needing a gateway
- Extensive range of indoor & outdoor sensors/nodes



- Enhanced network solutions with leading technology partners
- Agnostic to technology and connectivity protocol
- Enable future IoT needs while meeting today's needs

L-Max Linear



L-Max Linear LED Luminaire

2':	10W/ 12W/ 16W/ 20W	1100/ 1320/ 1760/ 2200 lm
4':	20W/24W/32W/40W	3,483/2,640/3,520/4,400 lms
8':	40W/48W/64W/80W	4,400/5,280/7,040/8,800 lms



MaxLite®

ENHANCED LIGHTING GUIDE



342 Changebridge Road,
Suite 201, Pine Brook, NJ 07058
T: 1-800-555-5629 | F: 973-244-7333
www.maxlite.com

ITEM # ENHANCEDBRO | ORDER CODE: 113381

Linear Highbays



BayMax™ HLS Series Linear Highbays

1.4': 78W/92W/115W 12,090/14,070/17,360 lms	1.9': 155W 23,400 lms	1.9': 135W/155W/185W 20,920/23,710/27,930 lms
2.6': 200W/230W/270W 31,000/35,190/40,770 lms	3.7': 270W/340W/400W 41,850/52,020/60,400 lms	



Utility Wrap Fixtures



LSU Series Utility Wrap Fixtures

2': 20W/25W/30W 2,843./3,398/3,964 lms	4': 23W/35W/48W 3,456/4,760/6,472 lms
---	--



Area Fixtures



M Series™ - Area Fixtures

22-75W 2,800-10,000 lms	100-150W 13,000-20,000 lms	200-300W 26,000-40,000 lms
-----------------------------------	--------------------------------------	--------------------------------------



Wall Mounts



M Series™ - Wall Mounts

22-75W 2,800-10,000 lms	100-150W 13,000-20,000 lms	200-300W 26,000-40,000 lms
-----------------------------------	--------------------------------------	--------------------------------------



Linear Strip Fixtures



LS3 Series Linear Strip Fixtures

2': 15W/20W/25W n/a lms	4': 23W/34W/47W 1,200 lms	8': 65W/75W/90W 9,880/11,250/12,870 lms
--------------------------------------	--	--



Vapor Tight Fixtures



LSV Series Vapor Tight Fixtures

2': 20W/25W/30W 12,090/14,070/17,360 lms	4': 23W/35W/48W 3,483/4,782/6,609 lms	8': 65W/75W/90W 9,620/23,710/11,880 lms
---	--	--



Floods



M Series™ - Floods

22-75W 2,800-10,000 lms	100-150W 13,000-20,000 lms	200-300W 26,000-40,000 lms
-----------------------------------	--------------------------------------	--------------------------------------



Poles/Brackets




Poles/Brackets


Steel, Alum Poles & Mounting Accessories

8' - 39'
Steel or Aluminum

See website for more
mounting accessories



Canopy/Parking Luminares

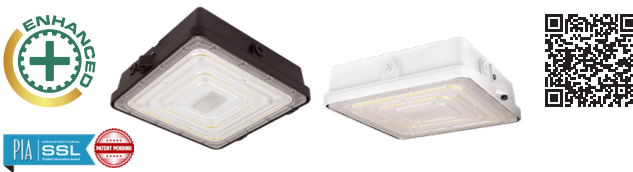


Canopy/Parking Luminares

20W 2,490-2,620 lms	30W 3,860-4,180 lms	40W 5,330-5,710 lms
52W 6,770-7,130-7,250 lms	38/48/58W 5,168,130-7,250 lms	



Cut Off Wall Packs

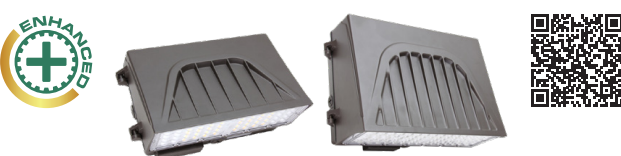

WallMax™ Cut Off Wall Packs

15W 2,140-2,340 lms	16-28W 2,150-3,730 lms	40-100W 5,510-13,610 lms
-------------------------------	----------------------------------	------------------------------------



Open Face Wall Packs



WallMax™ Open Face Wall Packs

15-55W 2,000-7,500 lms	80-120W 10,880-16,3210 lms
----------------------------------	--------------------------------------

