MaxLiTe®

A NEW WAVE OF LIGHT

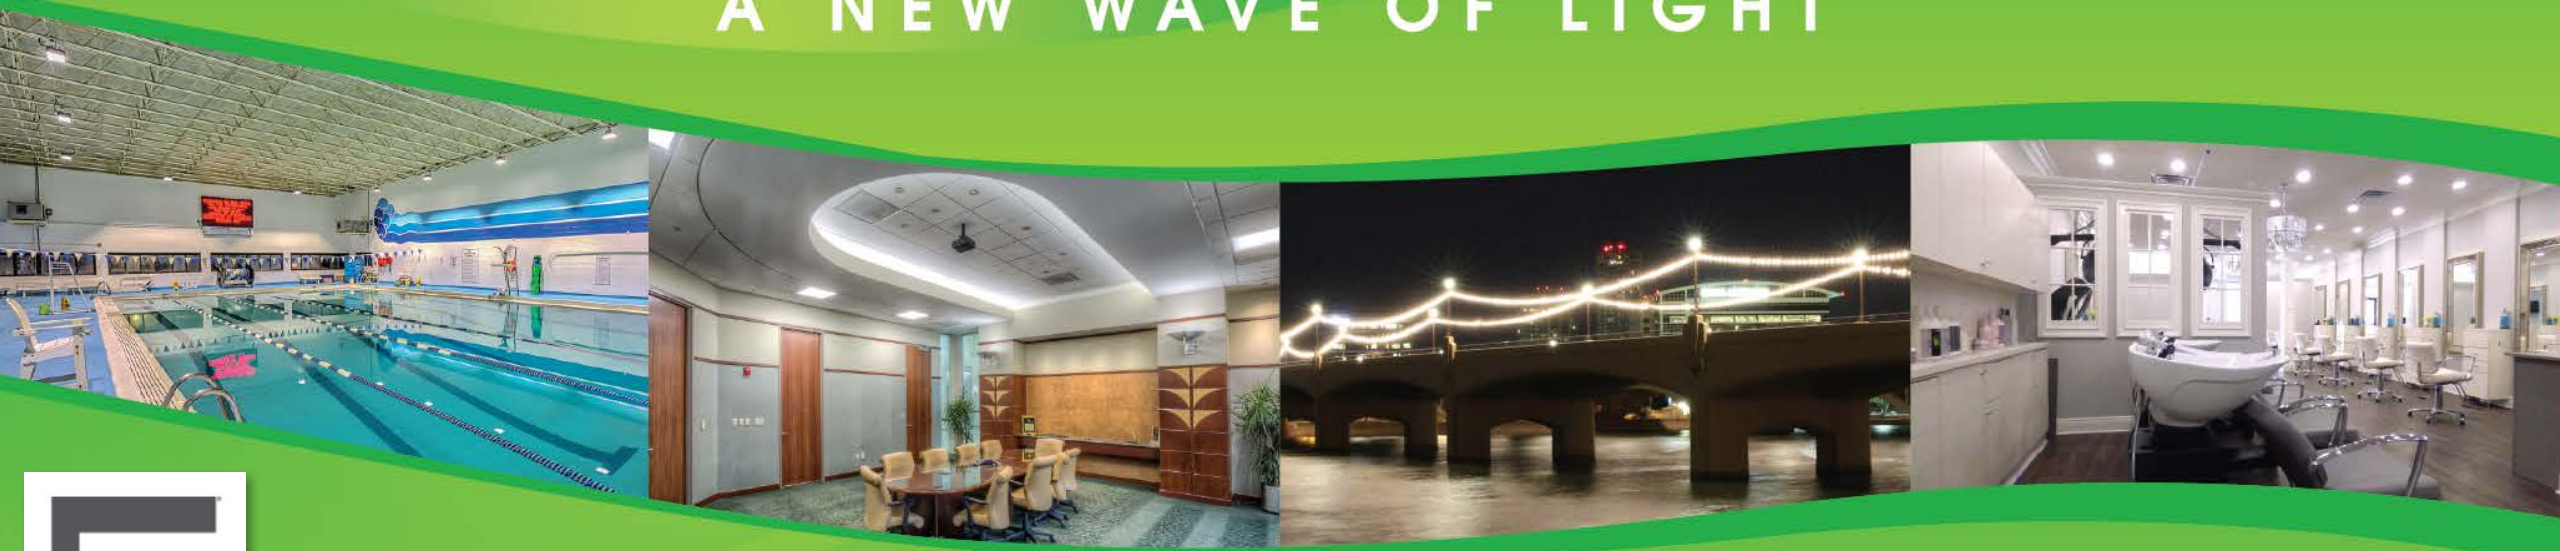

LIGHTFAIR INTERNATIONAL
The future. Illuminated.
2017

LIGHTFAIR 2017 PREVIEW WEBINAR
APRIL 27, 2017

MaxLiTe UNIVERSITY

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

LIGHTFAIR 2017 – BE A VIP!

BE A VIP AT LIGHTFAIR!

Score free VIP passes to LIGHTFAIR courtesy of MaxLite, while supplies last. **Click here to register**. And be sure to mark your calendar for our opening day cocktail party, Tuesday, May 9, from 4 – 6 pm at Booth #1949.

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

LIGHTFAIR 2017 – MAXLITE'S BOOTH #1949

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

LIGHTFAIR INTERNATIONAL
The future. Illuminated.
2017

MaxLite Booth: #1949

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

2017 LFI BOOTH FLOOR PLAN

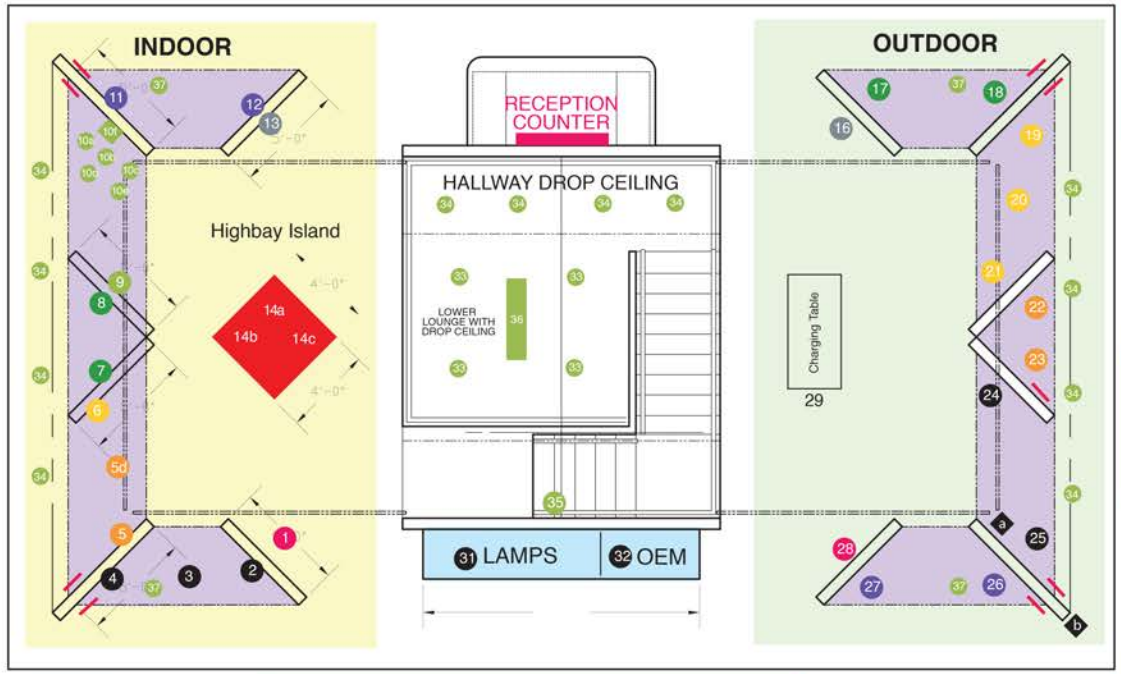

INDOOR

Highbays Island
14a New 12" Round High Bay?
14b 14" x 24" Linear High Bay
14c New Economic 12x24

CONTROLS 13 IntellaMax with Monitor

Recessed Panels
11 2x4 Edge Lit Graphic/Monitor
12a 2x2 Indirect
12b 2x4 ArcMax SB

Downlights
10a New 6" 9W 3000K J-Box Downlight-Ceiling
10b 4" Residential Downlight-Ceiling
10c 6" Faux Can - Ceiling
10d New 8" 30W 4000K Comm Retro- Ceiling
10e New 8" 17W 4000K Eco Retro - Ceiling
10F New 4" 7W 3000K J-Box Downlight-Wall

Retrofit Kits
9a 2x2 LRK retrofits
9d 2x4 LRK
9b 4' Strip Retrofit Kit
9c 4' Strip Retrofit Lamp Ready

Accent Lighting
8 Track Lighting
7a Lightbars, 12" 24" 36" 48" Plug N Play
7b Lightbars 12" 24" 48" Low Voltage

Linear Lumineers
6a New 48" 35W 4000K TriMax
6b New 48" 36W L-Form Linear
6c 48" 36W 5000K Linear Strip
6d New 48" 40W 5000K Shop Light

Pallet
5a New Pallet Utility Wrap
5b New Pallet Vapor Tight
5c New Pallet Troffer
5d 8' Strip Light

Multi-Residential
4a Sq Trad Lantern
4b Six Trad Lantern
4c Medium Lantern
4d Small lantern
2a Flush Mount Retrofit
2b Glass Large Wall Sconce
2c Vanity Bar
3a Pearl Series Flush
3b Archi Series Flush
3c Transitional Series Flush

SPECIALITY LAMPS
1 13w DirectFit T8 - CG4
1 12.5w Bypass T8
1 25w DirectFit T5 - CG4
1 19W External T8
1 U-Bend

Graphic Monitors

Decorative Booth Lighting
33 6" Residential Downlights
(4) Lounge
34 6" Residential Downlights
(4) Hallway
(8) Archways
35 (15) Round Pendants
36 Up/Down Square Pendant
37 (4) Large Bullets 5000K

31 LAMPS
Filament B10
Filament A19
Filament T14
Filament G25
Filament ST19
3-Way
GX23
GX23
E26
G24q
G24q
A-lamp 40w replacement
A-lamp 60w replacement
A-lamp 75w replacement
A-lamp 100w replacement
JA8 Enclosed 60w replace
Reflector R20
Reflector BR30
Reflector BR40
PAR20
PAR30LN
PAR38
Decorative Candle
Decorative G16.5
Decorative G25
Decorative G40
Miniature G4
Miniature Wedge
Miniature G9
Miniature G9
Standard Puck
Compact Puck
Socket Source Fixture
New HighMax 200W Replace
New HighMax 400W Replace

32 OEM/ LIGHT ENGINES and MODULES
LEL5.5A0530C
LEL5.5IB
LEL11.5A0830C
LEL11.5IB
LEL23A1630C
LEL23IB
LER2.2A0830C
LER2.2IB
LER2.2A1230C
LER2.2IB
LER5.5A1730C
LER5.5IB
LER7.0A2330C
LER7.0IB

OUTDOOR

MPulse Flood
16 600W High Output Flood

MPulse Wall Pack
17 50W WALL PACK WITH LOW GLARE MODULE
18 100W WALL PACK (REGULAR)
18 Tablet with other Wall Packs offered.

MPulse Canopy
19 MPulse surface Canopy Graphic/Monitor
20 MPulse Pendant Mount Canopy

MPulse Floods
21 10W BULLET FLOOD
21 100W FLOOD (WITH TRUNION)

QuadroMax Plus
22 QuadroMax Plus Area
23 QuadroMax Exploded

MPulse Area and Pedestrian
24 MPulse 200W Area Light
25a 4' MPulse 25W Bollard
25b 12' MPulse 25W Bollard
25 Graphic/Monitor

Vapor Proof/Security
26a HazLoc StaxMax
26b HazLoc Linear
26c HazLoc Jelly Jar
27a HazLoc HLR Max
27b HazLoc Area Light

Signage
28a 12x 12 sign
28b 18x12 sign
28c 4' x 2' sign with post and stand 70" tall

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

LED INDOOR PALLET PROGRAM

MaxLite

GUARANTEED SALE!

ANY UNOPENED FIXTURES CAN BE RETURNED AT THE DISTRIBUTOR'S EXPENSE FOR UP TO 6 MONTHS FROM THE INVOICE DATE.

2017

LED Indoor Pallet Program

SAVE OVER 50%

ONLY AVAILABLE IN PALLET QUANTITIES

Use Promo Code: **2017PALLETPGM**

FREE FREIGHT on initial orders over $2500 and any future orders of $750 or more on indoor products.

DLC QPL LISTED

- Non-dimmable
- Universal voltage 120-277V
- L70 lumen maintenance of 50,000 hours
- 5 year limited warranty
- DLC Qualified Products

ITEM #	MODEL # ORDER #	DESCRIPTION	QUANTITY/ PALLET
	LSVECO-4NU4040-P 108052	4ft Vapor Tight ECO 4000K, 38W 4,300 lumens	72 48" x 40" Pallet Dim
	LSVECO-4NU4050-P 108053	4ft Vapor Tight ECO 5000K, 38W 4,300 lumens	72 48" x 40" Pallet Dim
	LSUECO-4NU4040-P 108054	4ft Utility Wrap ECO 4000K, 41W 4,300 lumens	72 48" x 40" Pallet Dim
	LSUECO-4NU4050-P 108055	4ft Utility Wrap ECO 5000K, 41W 4,300 lumens	72 48" x 40" Pallet Dim
	MLRT24N4240-P 108057	2x4 Troffer ECO 4000K, 42W 4,500 lumens	20 48" x 40" Pallet Dim
(4ft 2 pack)	LSECO-4NU2050-P 108056	8ft Utility Strip ECO 5000K, 40W* 4,200 lumens*	72 (4ft - 2 packs) 48" x 40" Pallet Dim

*Specs are for 8ft product

Promo valid 2/1/17 - 12/31/17

MaxLite® NJ Office: 1-800-555-5629 | **Fax:** 973-244-7333 | **Web:** www.maxlite.com | **E-mail:** info@maxlite.com
MaxLite® CA Office: 1-800-793-1212 | **Fax:** 714-678-5096 | **Web:** www.maxlite.com | **E-mail:** custservana@maxlite.com

Promo Code: 2017PALLETPGM Updated: 05/01/17

© 2017 MaxLite®. All Rights Reserved.

MaxLite®

A NEW WAVE OF LIGHT

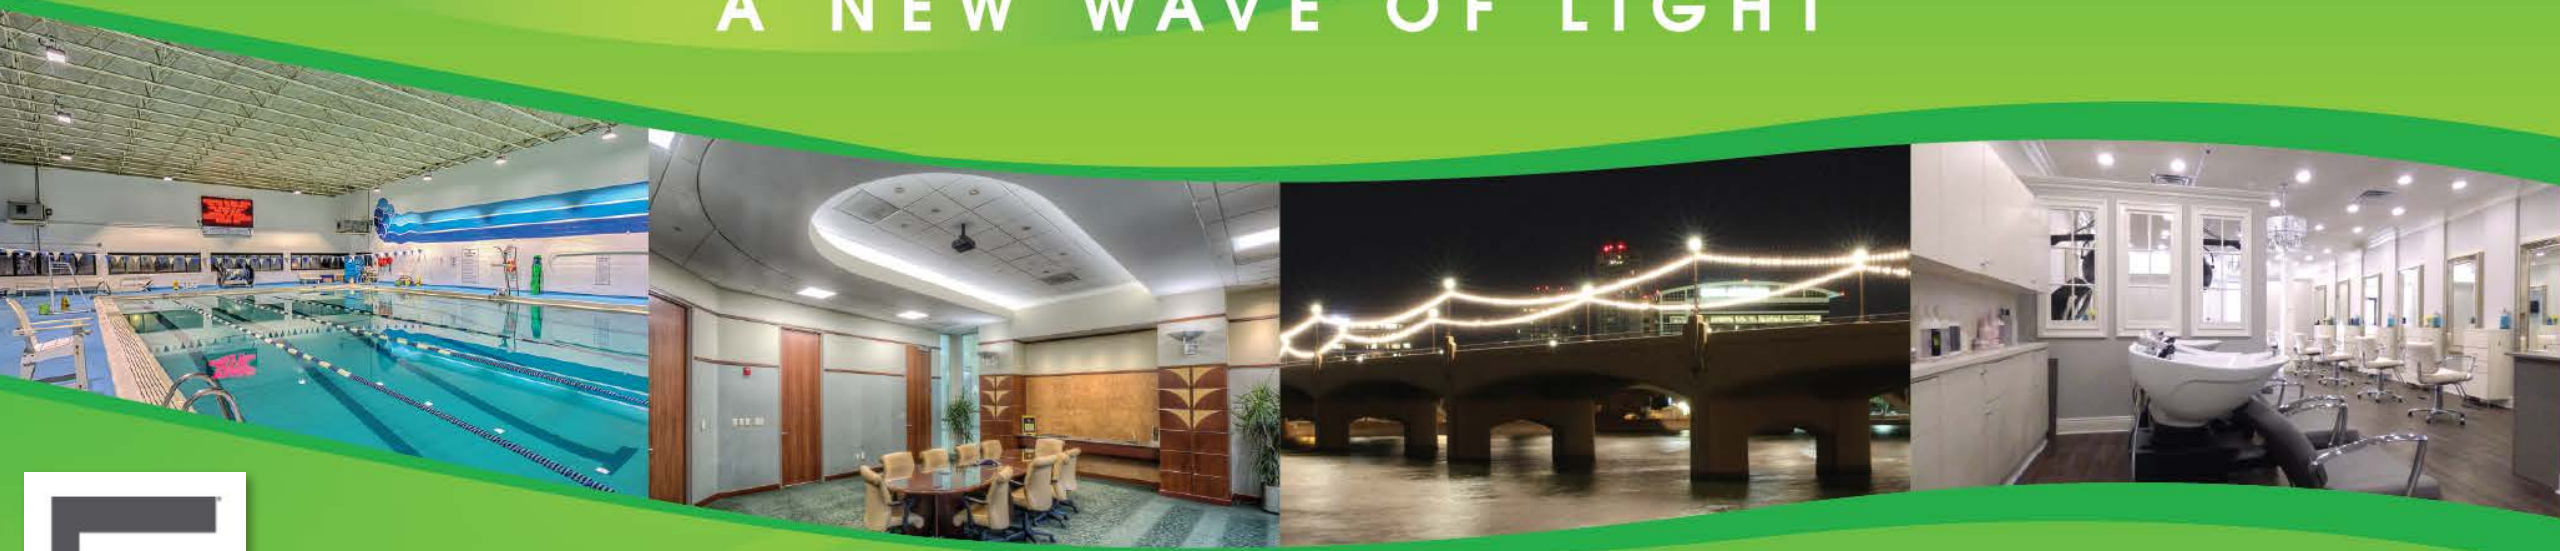

LIGHTFAIR INTERNATIONAL
The future. Illuminated.
2017

INDOOR INDUSTRIAL PRODUCT OVERVIEW

RAMESH RAGHAVAN

MaxLite UNIVERSITY

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

INDOOR INDUSTRIAL - OVERVIEW

HIGH BAYS

LINEAR FIXTURES

RETROFIT KITS

COOLER LIGHTS

PALLET PROGRAM

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

HIGH BAYS

Round High Bay

- 12,000 lumens @ 90W
- 16,000 lumens @ 110W
- 24,000 lumens @ 160W
- 27,000 lumens @ 185W
- Options – BBU, Motion Sensor, High Voltage, Wireless Control
- 0-10V Dimming
- 7 year warranty (10 available)
- CCT values of 4000K or 5000K

Available Q2

Linear High Bay

- 12,000 lumens @ 95W
- 16,000 lumens @ 140W
- 24,000 lumens @ 185W
- Translucent Lens standard
- Options – BBU, Motion Sensor, High Voltage, Wireless Control
- 0-10V Dimming
- 7 year warranty (10 available)
- CCT values of 4000K or 5000K
- 2’ length

Available Q3

Linear High Bay

- 12,000 lumens @ 90W
- 18,000 lumens @ 135W
- 22,000 lumens @ 165W
- Translucent Lens standard
- Non-Dimming
- 5 year limited warranty
- CCT value of 5000K
- 2’ length

Available Q3

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

LINEAR FIXTURES

LForm

- 4,100 lumens @ 36W
- 5,800 lumens @ 49W
- Options – BBU, Motion Sensor, 8ft Linkable
- 0-10V Dimming
- 5 year warranty (10 available)
- CCT values of 3500K, 4000K, or 5000K

Available Now

TriMax

- 4,600 lumens @ 40W
- 6,900 lumens @ 60W
- Options – BBU, Motion Sensor
- 0-10V Dimming
- 5 year warranty (10 available)
- CCT values of 4000K or 5000K
- Upgrade in development

Available Now

Linear Strip

- 2,700 lumens @ 24W
- 4,000 lumens @ 36W
- 0-10V Dimming
- 5 year limited warranty
- CCT – 5000K standard. 3500K and 4000K available
- Upgrade in development

Available Now

Shop Light

- 4,100 lumens @ 40W
- Non-dimming
- Built in on/off pull chain
- Linkable up to 4 units
- 120V, 60Hz operation
- Chain & hooks provided
- 5 year limited warranty
- CCT value of 5000K
- ENERGY STAR

Available Now

© 2017 MaxLite®. All Rights Reserved.

RETROFIT KITS

Retrofit Strip Kit

- 2,700 lumens @ 24W
- 4,000 lumens @ 36W
- 0-10V Dimming
- Can retrofit 8ft fluorescent fixtures using tandem bracket provided
- 5 year limited warranty
- CCT – 5000K standard. 3500K and 4000K available
- Upgrade in development

Available Now

Lamp Ready Retrofit Strip Kit

- **Lamps not included**
- Max 22W per lamp
- Uses 2 LED T8 lamps per 4ft retrofit kit
- Can retrofit 8ft fluorescent fixtures using tandem bracket provided
- 5 year limited warranty

Available Now

© 2017 MaxLite®. All Rights Reserved.

PALLET PROGRAM

Vapor Tight (PALLET)

- 4,200 lumens @ 40W
- Non-dimming
- Suitable for Wet locations
- 5 year limited warranty
- CCT values of 4000K or 5000K
- Pallet quantities only
- 72 products per pallet

Available Now

Utility Wrap (PALLET)

- 4,300 lumens @ 40W
- Non-dimming
- Suitable for Damp locations
- 5 year limited warranty
- CCT values of 4000K or 5000K
- Pallet quantities only
- 72 products per pallet

Available Now

Linear Strip (PALLET)

- 4,200 lumens @ 40W*
- Non-dimming
- Linkable to create 8ft fixture
- 5 year limited warranty
- CCT value of 5000K
- Pallet quantities only
- 72 of 8ft (2x4ft) product per pallet

*Specs based on 8ft fixture

Available Now

© 2017 MaxLite®. All Rights Reserved.

COOLER & FREEZER LIGHTS

Cooler and Freezer Light

- 1,400 lumens @ 18W 48”
- 1,800 lumens @ 22W 60”
- 2,100 lumens @ 26W 72”
- Non-dimmable
- Internal driver – no need for additional, external power supply
- 120V, 60Hz operation
- 5 year limited warranty
- CCT – 4000K standard, 3500K and 5000K available

Available Q2

© 2017 MaxLite®. All Rights Reserved.

MaxLiTe®

A NEW WAVE OF LIGHT

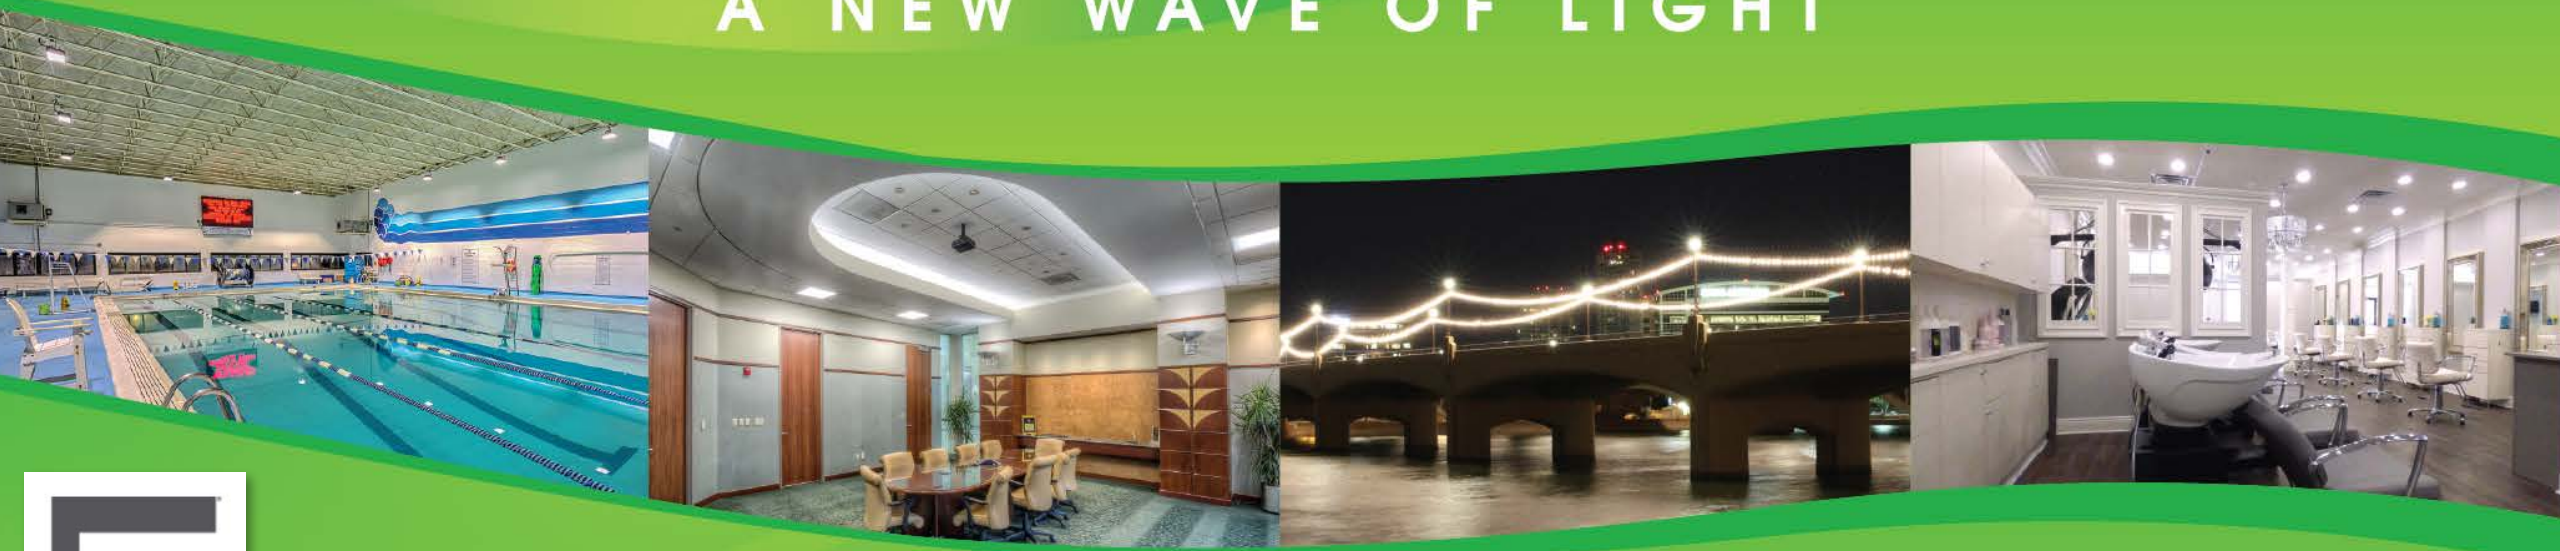

LIGHTFAIR INTERNATIONAL
The future. Illuminated.
2017

INDOOR COMMERCIAL PRODUCT OVERVIEW

BRENDAN DREW

MaxLiTe UNIVERSITY

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

INDOOR COMMERCIAL - OVERVIEW

FLAT PANELS

DOWNLIGHTS

LIGHT BARS

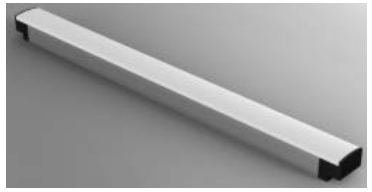

RETROFIT KITS

TRACK SYSTEM

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

FLAT PANELS

ArcMax Volumetric

- 3,800 lumens @ 36W 2’ x 2’
- 5,100 lumens @ 45W 2’ x 4’
- Options – BBU, Motion Sensor
- Surface & flange kits available
- 0-10V Dimming
- Suitable for Damp locations
- 5 year warranty (10 available)
- CCT values of 3500K or 4000K

Available Q2

FlatMax Edge Lit Panel

- 3,600 lumens @ 30W 2’ x 2’
- 4,500 lumens @ 35W 2’ x 2’ (DLC+)
- 4,500 lumens @ 40W 2’ x 4’
- 5,800 lumens @ 48W 2’ x 4’ (DLC+)
- BBU, Surface, Cable kits available
- 0-10V Dimming
- 5 year warranty (10 available)
- CCT values of 3500K, 4100K. or 5000K

Available Now

Eco-T Recessed Troffer

- 3,400 lumens @ 34W 2’ x 2’
- 4,500 lumens @ 42W 2’ x 4’
- Surface & flange kits available
- 0-10V Dimming
- 5 year limited warranty
- CCT value of 4000K or 5000K
- Pallet quantities for 2’ x 4’ non-dimming version

Available Now

© 2017 MaxLite®. All Rights Reserved.

DOWNLIGHTS (COMMERCIAL)

Commercial Downlight

- 1,000 lumens @ 10W 4” up to 1,500 lumens @ 15W 4”
- Up to 2,200 lumens @ 22W 6”
- Up to 5,000 lumens @ 50W 8”
- Up to 5,000 lumens @ 50W 9”
- Triac or 0-10V Dimming
- Universal Voltage: 120-277V
- 5 year limited warranty
- CCT values of 3000K or 4000K

Available Q3

Economic Downlight

- 1,000 lumens @ 12W 6” up to 2,300 lumens @ 27W 6”
- 1,000 lumens @ 12W 8” up to 3,400 lumens @ 40W 8”
- 0-10V Dimming
- Universal Voltage: 120-277V
- 5 year limited warranty
- CCT values of 3000K or 4000K

Available Q2

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

DOWNLIGHTS (RESIDENTIAL)

RR-L7 Downlight

- 720 lumens @ 10W 4”
- 880 lumens @ 11W 6”
- 1,300 lumens @ 18W 6”
- Triac Dimming
- Single Voltage: 120V
- 90CRI optional
- 5 year limited warranty
- CCT values of 2700K, 3000K, or 4000K

Available Now

Universal Res Downlight

- 720 lumens @ 9W 4”
- 1,200 lumens @ 13W 6”
- Triac Dimming @ 120V
- Universal Voltage: 120-277V
- 5 year limited warranty
- CCT values of 3000K, 4000K, or 5000K

Available Now

J-Box Downlight

- 500 lumens @ 8W 4”
- 700 lumens @ 10W 6”
- Triac Dimming
- Single Voltage: 120V
- JA8 90CRI optional
- No housing required
- 5 year limited warranty
- CCT values of 2700K, 3000K, or 4000K

Available Q3

Faux Can

- 860 lumens @ 13W 4”
- 1,000 lumens @ 15W 6”
- Triac Dimming
- Single Voltage: 120V
- Wet listed
- 5 year limited warranty
- CCT value of 2700K, 3000K, or 4100K

Available Now

© 2017 MaxLite®. All Rights Reserved.

LIGHT BARS

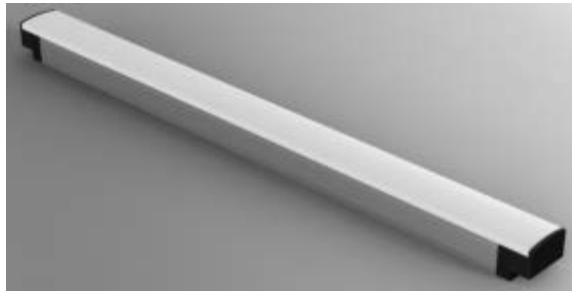

Main Voltage Light Bar

- 320 lumens @ 4W 12”
- 650 lumens @ 8W 24”
- 950 lumens @ 12W 36”
- 1,200 lumens @ 16W 48”
- Triac Dimming
- Single Voltage: 120V
- JA8 compliant and CRI 90
- 5 year limited warranty
- CCT values of 2700K, 3500K or 5000K

Available Q3

Low Voltage Light Bar

- **Power supply not included**
- 300 lumens @ 5W 12”
- 600 lumens @ 10W 24”
- 850 lumens @ 15W 36”
- 1,000 lumens @ 18W 48”
- Dims with proprietary dimming accessory
- 24V DC operation
- 5 year limited warranty
- CCT values of 3000K or 4000K

Available Now

© 2017 MaxLite®. All Rights Reserved.

RETROFIT KITS

Lens Retrofit Kit

- 3,000 lumens @ 30W 2’ x 2’ ≥100lm/W
- 3,200 lumens @ 25W 2’ x 2’ ≥125lm/W
- 4,200 lumens @ 40W 2’ x 4’ ≥100lm/W
- 4,400 lumens @ 35W 2’ x 4’ ≥125lm/W
- 0-10V Dimming
- BBU option available
- Suitable for Damp locations
- 5 year limited warranty (10 available)
- CCT value of 3000K, 4100K, or 5000K

Available Q2

© 2017 MaxLite®. All Rights Reserved.

TRACK SYSTEM

Track System

- **Lamps not included**
- Designed for either E26 base (PAR20 & PAR30) or GU10 base (MR16) LED bulbs
- Various styles, sizes, and finishes available
- Track, connectors, and other accessories sold separately
- Track heads listed to work with MaxLite track only

Available Q2

© 2017 MaxLite®. All Rights Reserved.

MaxLite®

A NEW WAVE OF LIGHT

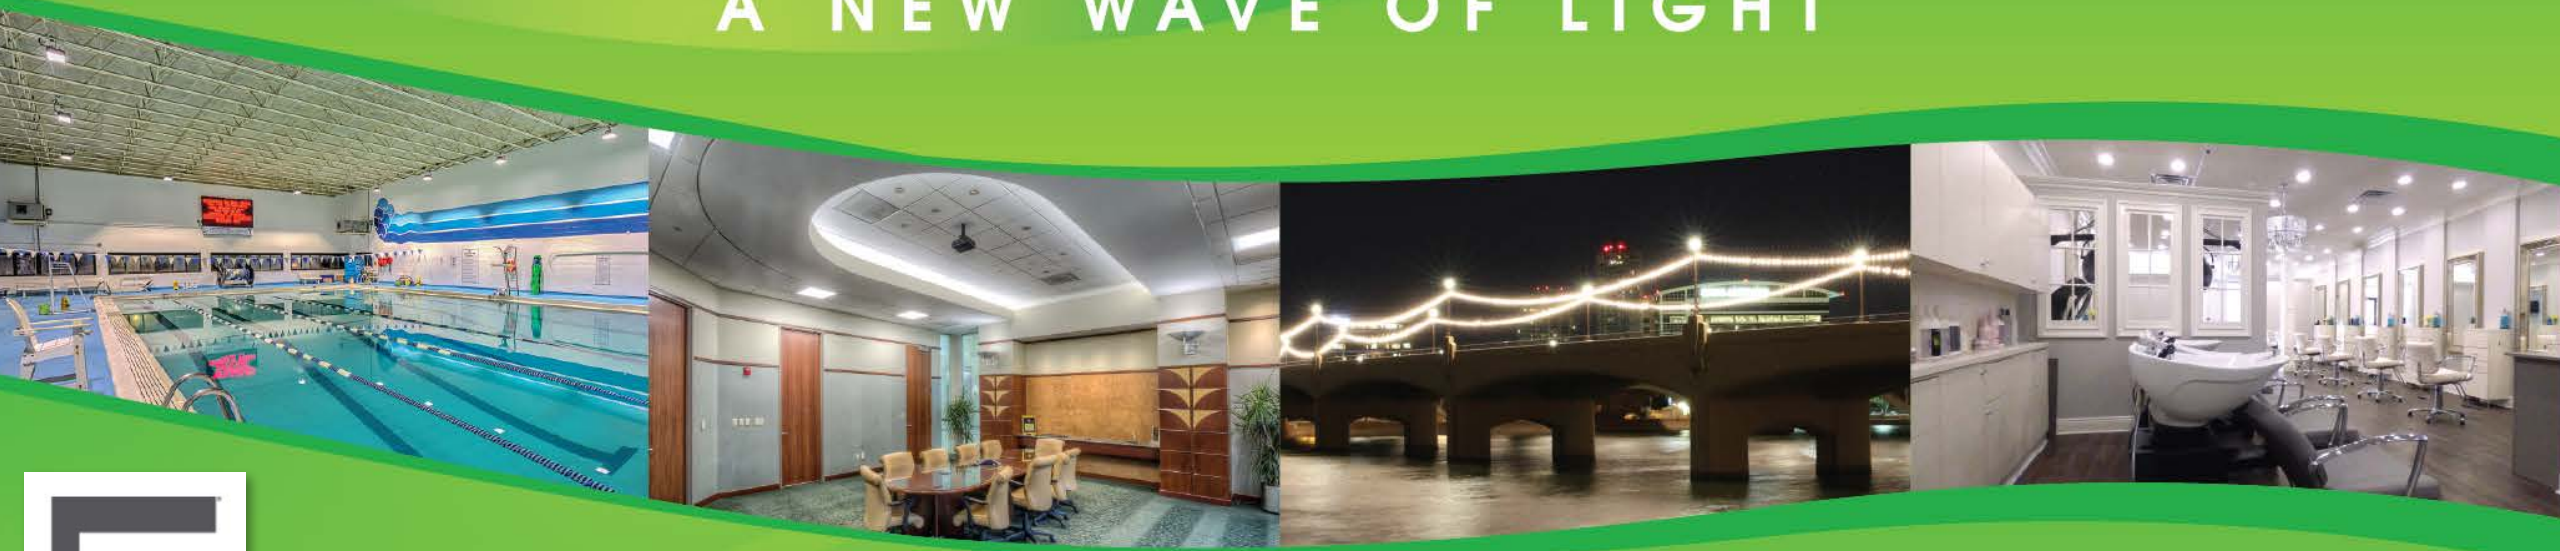

LIGHTFAIR INTERNATIONAL
The future. Illuminated.
2017

INDOOR MULTI FAMILY RESIDENTIAL PRODUCT OVERVIEW - BRENDAN DREW

MaxLite UNIVERSITY

© 2017 MaxLite®. All Rights Reserved.

MULTI FAMILY RESIDENTIAL (BULB IN A BOX)

Traditional Ceiling Flush Mount
- 2,200 lm @ 24W (2 x 12W bulbs)
- JA8 Compliant bulbs included
- Triac dimmable w/ compatible bulb
- Various color finishes available

Tulip Vanity Bar
- 2,400 lm @ 30W (3 x 10W bulbs)
- JA8 Compliant bulbs included
- Triac dimmable w/ compatible bulb
- Various color finishes available

Outdoor Ranch Lantern
- 1,600 lm @ 17W (1 x 17W bulb)
- JA8 Compliant bulbs included
- Triac dimmable w/ compatible bulb
- Various color finishes available
- DLH Motion sensor optional

Torchiere
- 2,150 lm @ 22W
  (1 x 10W + 1 x 12W bulbs)
- JA8 Compliant bulbs included
- Triac dimmable w/ compatible bulb
- Various color finishes available

Wall Sconce
- 800 lm @ 10W (1 x 10W bulb)
- JA8 Compliant bulbs included
- Triac dimmable w/ compatible bulb
- Various color finishes available

© 2017 MaxLite®. All Rights Reserved.

MULTI FAMILY RESIDENTIAL (LED INTEGRATED)

Ceiling Flush Mounts

- From 980lm @ 14W up to 1,950lm @ 24W
- 3 sizes: Small, Medium, or Large
- Cloud, Architectural, Traditional, or Pearl form factor
- 80CRI
- Triac dimmable
- CCT values of 2700K or 4000K
- Various color finishes available

Vanity Bars

- 2,100 lm @ 30W
- Architectural or Tulip form factor
- 80CRI
- Triac dimmable
- CCT values of 2700K or 4000K
- Various color finishes available

Wall Sconce

- 1,600 lm @ 23W
- 80CRI
- Triac dimmable
- CCT values of 2700K or 4000K
- Various color finishes available

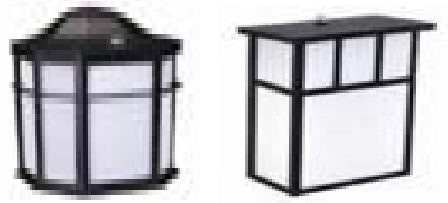

Outdoor Lanterns

- 980 lm @ 14W
- Traditional or Mission form factor
- 80CRI
- Triac dimmable
- Photocell optional
- CCT values of 2700K or 4000K
- Various color finishes available

Flush Mount Retrofit Kit

- 1,300 lm @ 17W
- 1,600 lm @ 23W
- 90CRI
- Triac dimmable
- CCT: 2700K or 3000K

© 2017 MaxLite®. All Rights Reserved.

MaxLiTe®

A NEW WAVE OF LIGHT

LIGHTFAIR INTERNATIONAL
The future. Illuminated.
2017

OUTDOOR PRODUCT OVERVIEW

SHENALI PARIKH

MaxLiTe UNIVERSITY

© 2017 MaxLite®. All Rights Reserved.

HAZARDOUS LOCATION LIGHTING SOLUTIONS

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

MaxLiTe

HAZARDOUS LOCATION LIGHTING

Area/Flood Light
- Replaces 250W MH to 400W MH
- Up to 60C operation
- DLC Premium
- 10 year warranty standard

Lowbay Light
- Replaces 250W MH to 400W PSMH
- Modular solution with area, flood, wall, and lowbay lighting applications
- DLC Standard
- Up to 50C operation
- 10 year warranty standard

High Output Flood Light
- Replaces 320W MH to 1000W PSMH
- Modular solution with narrow, medium, wide optics
- Up to 55C operation
- 5 year warranty standard

© 2017 MaxLite®. All Rights Reserved.

HAZARDOUS LOCATION LIGHTING

Jelly Jar
- 15W
- Class I Division 2
- Class II Division 1
- Up to 65C operation
- DLC Premium qualified
- 10 year warranty standard

Linear Light
- 40W, 80W
- Class I Division 2
- Class II Division 1
- Up to 65C operation
- DLC Premium qualified
- 10 year warranty standard

© 2017 MaxLite®. All Rights Reserved.

HORTICULTURE LIGHTING SOLUTIONS

© 2017 MaxLite®. All Rights Reserved.

HORTICULTURE SOLUTIONS

MaxLiTe

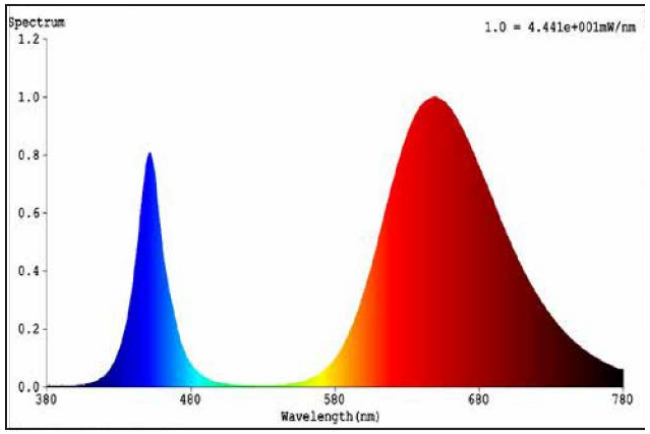

T8 Tube (UL-B Type)

- Replaces 32W Fl. MH
- Dual Spectrum
- 18W
- 25 µmol/s

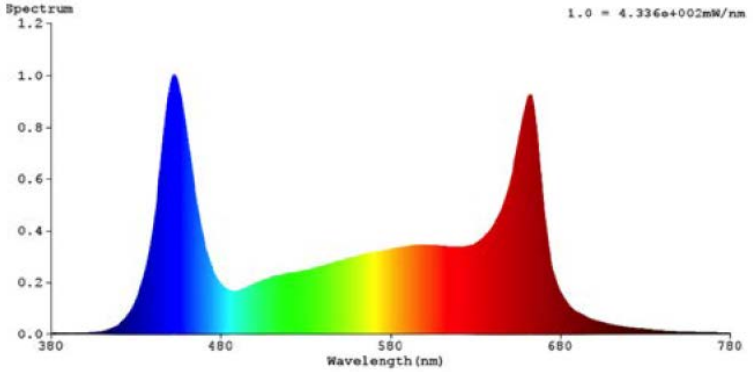

Linear Tunable Fixture

- Controls to adjust R/G/W light
- Tunable Spectrum
- 180W
- Up to 300 µmol/s

HORTICULTURE SOLUTIONS

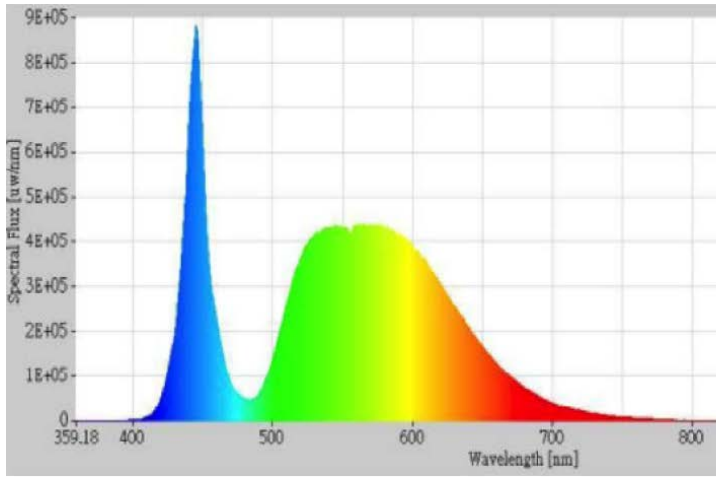

Spot Light Fixtures

- Replaces 1000W MH
- Full Spectrum
- 600W, 1200W
- Up to 113,455 µmol/s
- IP66

MaxLiTe®

MPulse™

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

MaxLite

MPulse Architectural Lighting Solutions

A DISTINCTIVE & CLEAN LOOK

AREA

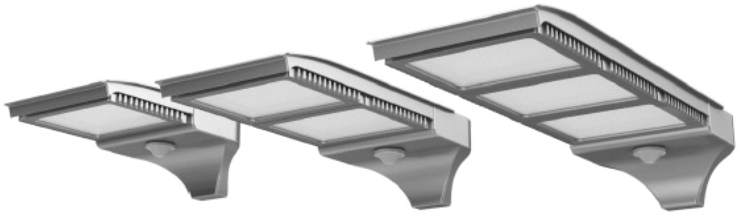

WALL MOUNT

CANOPY

FLOOD

BOLLARD

Industry’s ONLY complete outdoor range design

© 2017 MaxLite®. All Rights Reserved.

FLOOD LIGHT

High Output Flood
Available in
(200W, 300W, 400W, 600W)

Bullets
Available in
(5W, 10W, 15W, 30W)

Medium Floods
Available in
(25W, 50W, 100W)

© 2017 MaxLite®. All Rights Reserved.

AREA LIGHT

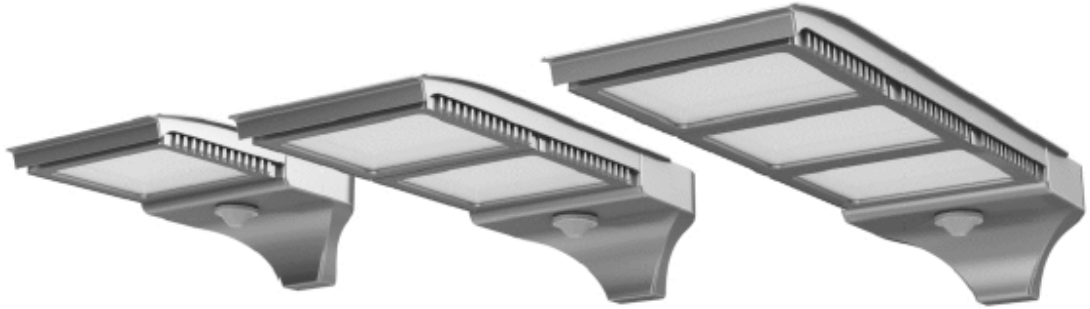

Available in three sizes (50W, 100W, 200W, 300W)

© 2017 MaxLite®. All Rights Reserved.

CANOPY

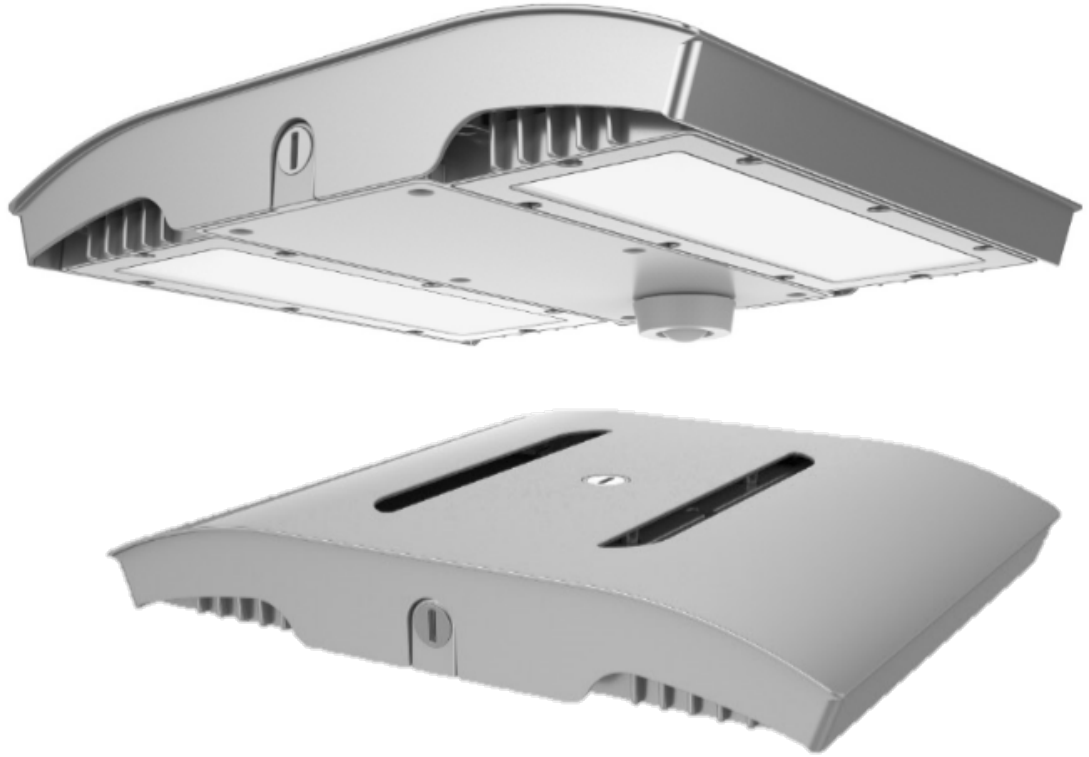

Available in two sizes (25W, 50W, 100W)

© 2017 MaxLite®. All Rights Reserved.

BOLLARDS

Available in two sizes (10W, 25W)

© 2017 MaxLite®. All Rights Reserved.

SURFACE MOUNT FEATURING VISUAL COMFORT

Key Features:

- Visual Comfort Technology available
- Type III and IV optics
- 0°-45° field adjustable head
- One person field installation
- Quick and easy driver replacement

Available in two sizes (25W, 50W, 100W)

© 2017 MaxLite®. All Rights Reserved.

QUADROMAX FEAT. VISUAL COMFORT

© 2017 MaxLite®. All Rights Reserved.

QUADROMAX FEATURING VISUAL COMFORT

Key Features:

- Visual Comfort Technology available
- Type III, IV, and V optics
- EIGHT Mounting Options to address FOUR key areas of lighting

Rigid Pole Mount
(PM)

Slipfitter Knuckle
(SK)

Slipfitter Fixed
(SF)

Fixed Surface
(FS)

Knuckle Surface
(KS)

Trunnion Swivel
(TS)

Wall Pack
(WP)



Canopy
(CP)

Available in two sizes (From 25W to 160W)

MaxLite®

QuadroMax PLUS

© 2017 MaxLite®. All Rights Reserved.

QUADROMAX PLUS AREA LIGHT

More Modular

- Six wattages reaching up to 750W PSMH replacement
- Up to 300W and 36,000lm+

© 2017 MaxLite®. All Rights Reserved.

QUADROMAX PLUS AREA LIGHT

Better Performance

- DLC 4.1 Premium
- Higher operating temperature: 60C

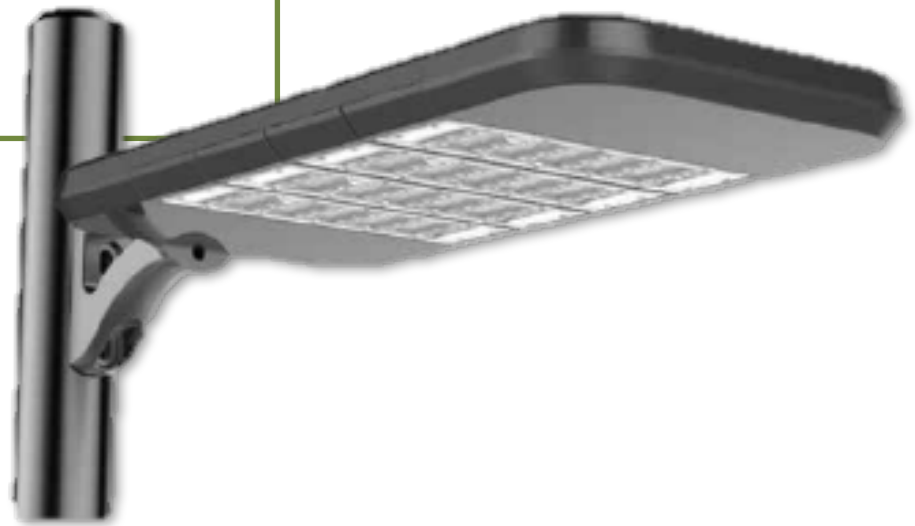

© 2017 MaxLite®. All Rights Reserved.

QUADROMAX PLUS AREA LIGHT

Ease of Installation & Service

- 5 minute driver field replacement

© 2017 MaxLite®. All Rights Reserved.

QUADROMAX PLUS AREA LIGHT

More Features

- Type II, III, IV, and V optics
- Variety of CCTs available (3000K, 4000K, 5000K)
- 10 Year Warranty
- House Side Shield

© 2017 MaxLite®. All Rights Reserved.

HOW DOES IT ALL FIT?

Top Tier Solutions

- Visual Comfort Technology: Industry leading technology designed to combat “glare-bomb” associated with LED lighting. Offered in QuadroMax and Mpulse Surface Mount
- QuadroMax Plus: High performing, modular area light solution

MPulse Outdoor Range

- Step above traditional offering with focus on design and aesthetics

© 2017 MaxLite®. All Rights Reserved.

MaxLiTe®

A NEW WAVE OF LIGHT

LIGHTFAIR INTERNATIONAL
The future. Illuminated.
2017

LAMPS PRODUCT OVERVIEW
ALEX TRUONG

MaxLiTe UNIVERSITY

© 2017 MaxLite®. All Rights Reserved.

MAXLITE WEBINARS:

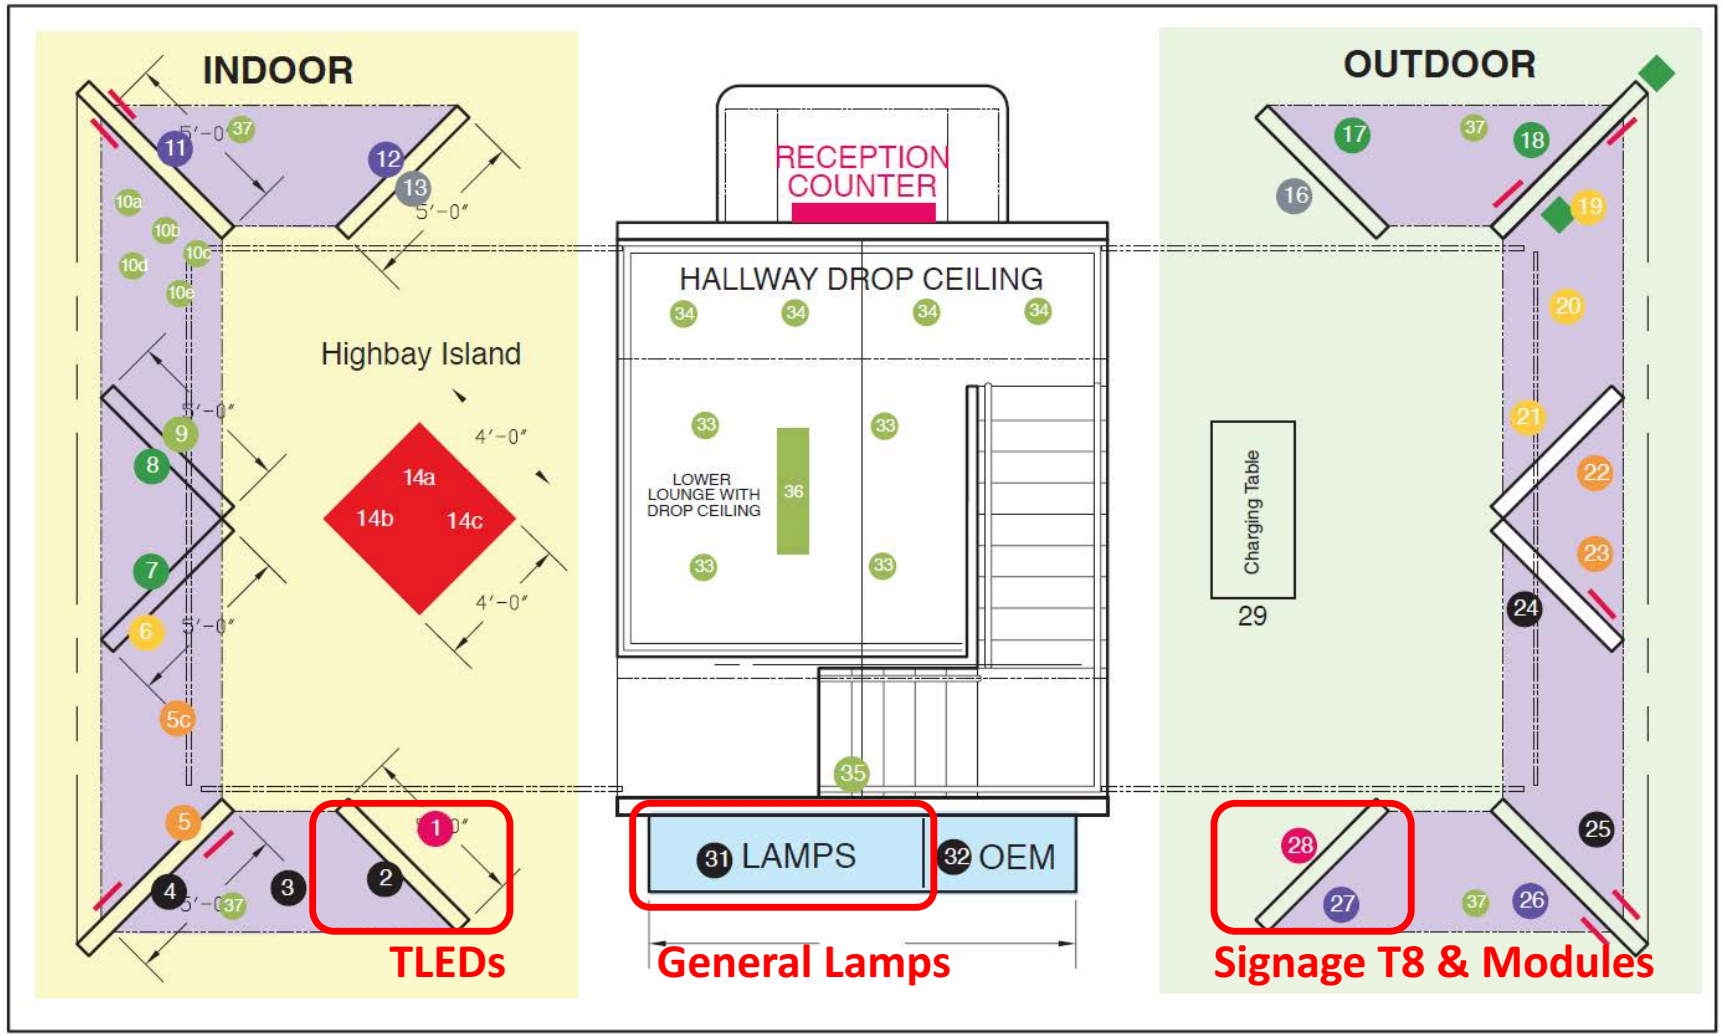

© 2017 MaxLite®. All Rights Reserved.

LED FILAMENT: B10, A19, G25, ST19, T14

Item #	Wattage	CCT	Lumens	Replacement
F4B10DLED927/JA8	4	2700K	300	40W Inc.
F8.5A19DLED927/JA8	8.5	2700K	800	60W Inc.
F7.5G25DLED27	7.5	2700K	800	60W Inc.
V5ST19DLED22	5	2200K	320	40W Inc.
V4.5T14DLED22*	4.5	2200K	400	40W Inc.

*No ENERGY STAR for this model

Key Features & Benefits

- Dimmable down to 10%
- 15,000 hours (L70)
- CRI ≥ 80, ≥90 (JA8 models)
- 3 Year limited warranty
- Available in 2700K. 2200K (ST19)
- Suitable for damp locations
- Not suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

A-LAMPS: DIMMABLE G4

Item #	Wattage	Color Temperature	Lumens
6A19DLEDxx/G4, 6A19GUDLEDxx/G4	6	2700K, 3000K, 4000K	480
9A19DLEDxx/G4, 9A19GUDLEDxx/G4	9	2700K, 3000K, 4000K	800
11A19DLEDxx/G4, 11A19GUDLEDxx/G4	11	2700K, 3000K, 4000K	1100
15A21DLEDxx/G4, 15A21GUDLEDxx/G4	15	2700K, 3000K, 4000K	1600

"xx" can be 27=2700K, 30=3000K, 40=4000K

Key Features & Benefits

- Replacement for 40W, 60W, 75W, 100W
- Dimmable down to 10%
- Long life: 25,000 hours (L70)
- CRI ≥ 82
- 5 Year limited warranty
- Available in 2700K, 3000K, and 4000K
- Suitable for damp locations
- Not suitable for enclosed fixtures
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

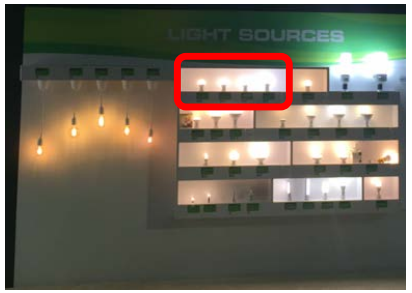

© 2017 MaxLite®. All Rights Reserved.

A-LAMPS: DIMMABLE G5

6W, 9W & 11W

15W

Item #	Wattage	Color Temperature	Lumens
6A19DLEDxx/G5	6	2700K & 3000K	480
9A19DLEDxx/G5	9	2700K & 3000K	800
11A19DLEDxx/G5	11	2700K & 3000K	1100
15A19DLEDxx/G5	15	2700K & 3000K	1600

"xx" can be 27=2700K, 30=3000K

Key Features & Benefits

- Replacement for 40W, 60W, 75W, 100W
- Dimmable down to 10%
- A19 shape
- Long life: 25,000 hours (L70)
- CRI ≥ 82
- 5 Year limited warranty
- Available in 2700K and 3000K
- Suitable for damp locations
- Not suitable for enclosed fixtures
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

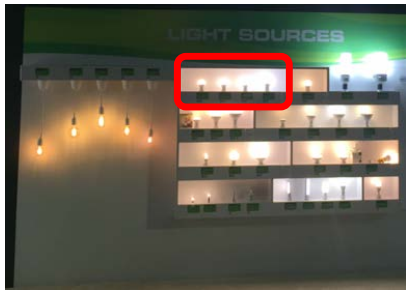

© 2017 MaxLite®. All Rights Reserved.

A-LAMPS: JA8 COMPLIANT

10W & 12W

17W

Item #	Wattage	Color Temperature	Lumens
10A19DLED9xx/JA8	10	2700K & 3000K	800
E10A19DLED9xx/JA8*	10	2700K & 3000K	800
E12A19DLED927/JA8*	12	2700K	1100
17A21DLED9xx/JA8	17	2700K & 3000K	1600

"xx" can be 27=2700K, 30=3000K. *Enclosed-rated model

Key Features & Benefits

- Replacement for 60W, 75W, 100W
- JA8 Compliant
- Dimmable down to 10%
- Long life: 25,000 hours (L70)
- CRI ≥ 90, R9≥50
- 5 Year limited warranty
- Available in 2700K, 3000K
- Suitable for damp locations
- Enclosed models are suitable for totally enclosed fixtures
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

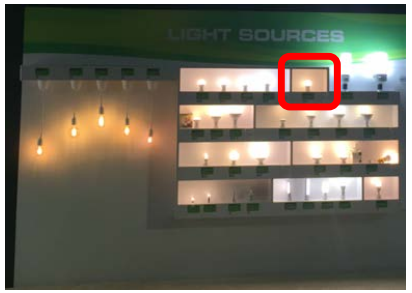

© 2017 MaxLite®. All Rights Reserved.

AREA RETROFIT LAMP

100W
(E39)

Wall Pack
Mounting Position

Area Light/Cobra Head
Mounting Position

Key Features & Benefits

- 120-277V, ballast bypass
- Replacement for 400W MH wall pack & area light
- Non-dimmable
- Rotatable base
- Built-in thermal protection
- Long life: 50,000 hours (L70)
- CRI ≥ 80
- 5 Year limited warranty
- Available in 5000K
- Suitable for damp locations
- Suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

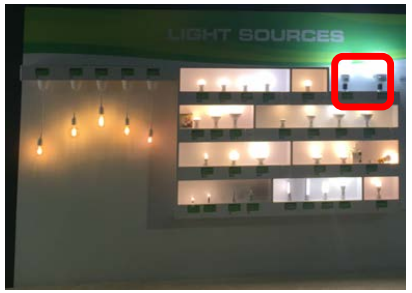

Item #	Wattage	CCT	Lumens	Replacement
AR100LED50	100	5000K	10500	400W MH

© 2017 MaxLite®. All Rights Reserved.

REFLECTORS: BR20, BR30, BR40

7W BR20

8W & 11W BR30

9W BR30 (Sunset)

17W BR40

Item #	Wattage	CCT	Lumens	Replacement
7BR20DLEDxx/G2	7	2700K, 3000K, 4000K	550	50W Inc.
8BR30DLEDxx/G2	8	2700K, 3000K, 4000K	650	65W Inc.
11BR30DLEDxx/G2	11	2700K, 3000K, 4000K	850	65W Inc.
9BR30SDLED30	9	3000K-2200K	650	65W Inc.
17BR40DLEDxx/G2	17	2700K, 3000K, 4000K	1400	100W Inc.

"xx" can be 27=2700K, 30=3000K, 40=4000K.

Key Features & Benefits

- Dimmable down to 10%
- Beam Angle: ≥ 110°
- Long life: 25,000 hours (L70)
- CRI ≥ 82
- 5 Year limited warranty
- Available in 2700K, 3000K, 4000K
- Sunset dimming from 3000K-2200K (9W BR30)
- Suitable for damp locations
- Not suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

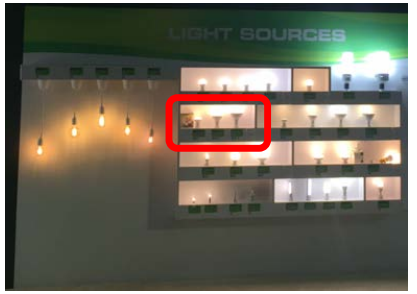

© 2017 MaxLite®. All Rights Reserved.

REFLECTORS HIGH CRI: BR30

11W BR30

Key Features & Benefits

- Dimmable down to 10%
- Beam Angle: ≥ 110°
- Long life: 25,000 hours (L70)
- CRI ≥ 90, R9 ≥50
- 5 Year limited warranty
- Available in 2700K, 3000K
- Suitable for damp locations
- Not suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

Item #	Wattage	CCT	Lumens	Replacement
11BR30DLED9xx/G4	11	2700K, 3000K	800	65W Inc.

"xx" can be 27=2700K, 30=3000K

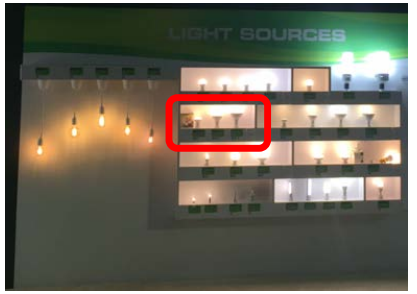

© 2017 MaxLite®. All Rights Reserved.

PAR20, PAR30, PAR30LN, PAR38

Item #	Wattage	CCT	Lumens	Replacement
6P20DLEDxxFL, 6P20DLEDxxNF	6	2700K, 3000K, 4000K	450	50W Inc.
10P30DLEDxxFL, 10P30DLEDxxNF	10	2700K, 3000K, 4000K	750	75W Inc.
10P30LNDLEDxxFL, 10P30LNDLEDxxNF	10	2700K, 3000K, 4000K	750	75W Inc.
13P38DLEDxxFL, 13P38LNDLEDxxNF	13	2700K, 3000K, 4000K	950	90W Inc.

"xx" can be 27=2700K, 30=3000K, 40=4000K.

Key Features & Benefits

- Dimmable down to 10%
- Beam Angle: 25°, 35°
- Long life: 25,000 hours (L70),
- CRI ≥ 82
- 5 Year limited warranty
- Available in 2700K, 3000K, 4000K
- Suitable for damp locations
- Not suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

PAR38 WET LOCATION

Key Features & Benefits

- Dimmable down to 10%
- Beam Angle: 40°
- Long life: 25,000 hours (L70),
- CRI ≥ 82
- 5 Year limited warranty
- Available in 2700K, 3000K
- Suitable for wet locations
- Not suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

Item #	Wattage	CCT	Lumens	Replacement
15P38WDLEDxxFL	15	2700K, 3000K	1250	120W Inc

"xx" can be 27=2700K, 30=3000K

© 2017 MaxLite®. All Rights Reserved.

GLOBES: G16.5, G25, G40

Item #	Wattage	CCT	Lumens	Replacement
5G16.5DLED27	5	2700K	350	40W Inc.
6G25DLED27/G2	6	2700K	450	40W Inc.
14G40DLED30	14	3000K	1300	150W Inc.

Key Features & Benefits

- Dimmable down to 10%
- Long life: 25,000 hours (L70)
- CRI ≥ 82
- 5 Year limited warranty
- Available in 2700K. 3000K (G40)
- Suitable for damp locations
- Not suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

PUCK LAMPS

E26/GU24
9W Dim & 10W Non-Dim

E26/GU24
10W Compact Non-Dim
UL Listed (Wet) @ 120V
UL Listed (Damp) @ 277V

Item #	Description	Wattage	CCT	Lumens
9PUADLEDxx	Standard, Dim	9	2700K, 3000K	800-850
9PUAGUDLEDxx	Standard, Dim	9	2700K, 3000K	800-850
10PUALEDxx	Standard, Non-Dim	10	2700K, 3000K	900-1000
10PUAGULEDxx	Standard, Non-Dim	10	2700K, 3000K	900-1000
10CPUALEDxx	Compact, Non-Dim	10	2700K, 3000K	900-1000
10CPUAGULEDxx	Compact, Non-Dim	10	2700K, 3000K	900-1000

"xx" can be 27=2700K, 30=3000K.

Key Features & Benefits

- 120-277V
- Replacement for 60W Inc.
- Dimmable & Non-Dim
- Long life: 50,000 hours (L70)
- CRI ≥ 80
- 5 Year limited warranty
- Available in 2700K, 3000K
- Suitable for damp/wet locations
- Suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

A-LAMPS: 3-WAY

Key Features & Benefits

- Replacement for 40W/60W/100W
- Suitable for 3-Way Socket
- Non-Dimmable
- Long life: 25,000 hours (L70)
- CRI ≥ 82
- 5 Year limited warranty
- Available in 2700K, 3000K
- Suitable for damp locations
- Not suitable for enclosed fixtures
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

Item #	Wattage	Color Temperature	Lumens
16A21/3WLEDxx/G2	5.5W/9W/16W	2700K & 3000K	450/800/1600

"xx" can be 27=2700K, 30=3000K.

© 2017 MaxLite®. All Rights Reserved.

MINIATURES: G4, WEDGE, G9

2.5W Bi-Pin
(Non Dimmable)

2.5W Wedge
(Non Dimmable)

3W G9

5W G9

TÜVRheinland LISTED

RoHS COMPLIANT

Item #	Description	Wattage	CCT	Lumens
2.5G4LED27	G4 Bi-pin, Non-Dim	2.5	2700K	180
2.5WDGLED27	Wedge, Non-Dim	2.5	2700K	180
3G9LED27	G9, Non-Dim	3	2700K	270
3G9DLED27	G9, Dim	3	2700K	270
5G9LED27	G9, Non-Dim	5	2700K	480
5G9DLED27	G9, Dim	5	2700K	360

Key Features & Benefits

- 12V (G4, Wedge)
- 120V (G9)
- Dimmable & Non-Dim
- Long life: 25,000 hours (L70)
- CRI ≥ 80
- 3 Year limited warranty
- Available in 2700K
- Suitable for damp locations
- Not suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

PL LAMPS: BALLAST BYPASS



c UL us LISTED

RoHS COMPLIANT

Item #	Wattage	CCT	Lumens	Replacement
6PLGX23LEDxx 6PLG24QLEDxx 6PLGU24LEDxx 6PLE26LEDxx	6	2700K, 3000K, 3500K, 4000K, 5000K	500-525	13W Fl.
8PLGX23LEDxx 8PLG24QLEDxx 8PLGU24LEDxx 8PLE26LEDxx	8	2700K, 3000K, 3500K, 4000K, 5000K	675-725	18W Fl.

"xx" can be 27=2700K, 30=3000K, 35=3500K, 40=4000K, 50=5000K

Key Features & Benefits

- 120-277V, ballast bypass
- Non-dimmable
- Available in E26, GU24, GX23, and G24q base.
- Rotatable base 270°
- Long life: 50,000 hours (L70),
- CRI ≥ 82
- 5 Year limited warranty
- Available in 2700K, 3000K, 3500K, 4000K, 5000K (select base type)
- Suitable for damp locations
- Suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

PL LAMPS: BALLAST COMPATIBLE

12W Horizontal

12W Vertical

Item #	Wattage	CCT	Lumens	Replacement
12PLG24QHLEDxx	12	2700K, 3500K, 4000K	900-1000	26W Fl.
12PLG24QVLEDxx	12	2700K, 3500K, 4000K	900-1000	26W Fl.

“xx” can be 27=2700K, 30=3000K, 35=3500K, 40=4000K

Key Features & Benefits

- Plug & Play (ballast compatible)
- Non-dimmable
- Available in G24q base
- Rotatable base 270° (horizontal model)
- Long life: 50,000 hours (L70)
- CRI ≥ 80
- 5 Year limited warranty
- Available in 2700K, 3500K, 4000K, Suitable for damp locations
- Not suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

T8: LINEAR (UL TYPE-A)

Item #	Description	Wattage	CCT	Lumens
L9T8DF2xx-CG4	2ft	9	3500K, 4000K, 5000K	1350-1400
L14T8DF3xx-CG4	3ft	14	3500K, 4000K, 5000K	1700-1800
L13T8DF4xx-CG4	4ft	13	3500K, 4000K, 5000K	1800-2000

"xx" can be 35=3500K, 40=4000K, 50=5000K.

Key Features & Benefits

- Plug & Play (UL Type-A)
- Compatible with most Instant Start, Programmed Rapid Start ballasts, and emergency ballasts
- Glass w/PET construction
- Dimmable w/compatible ballast
- Long life: 50,000 hours (L70)
- CRI ≥ 82
- 5 Year limited warranty
- Available in 3500K, 4000K, 5000K
- Suitable for damp locations
- Suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

T8: LINEAR (UL TYPE-B)

Item #	Length	Wattage	CCT	Lumens
L9T8SE2xx-G	2ft	9	3500K, 4000K, 5000K	1150
L12T8SE340-G	3ft	12	4000K	1450
L15T8SE4xx-G	4ft	15	3500K, 4000K, 5000K, 6500K	1800
L18T8SE4xx-G	4ft	18	3500K, 4000K, 5000K	2200
L19T8SE540-G	5ft	19	4000K	2500
L30T8SE640-G	6ft	30	4000K	3600

"xx" can be 35=3500K, 40=4000K, 50=5000K.

Key Features & Benefits

- Ballast Bypass (UL Type-B)
- Glass construction
- Non-Dimmable
- Long life: 50,000 hours (L70)
- CRI ≥ 82
- 5 Year limited warranty
- Available in 3500K, 4000K, 5000K, 6500K (15W only)
- Suitable for damp locations
- Suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

T8: LINEAR (UL TYPE-C)

Item #	Length	Wattage	CCT	Lumens
L19T8EX4xx	4ft	19	3500K, 4000K, 5000K	2350
DR1L	1-Lamp Driver			
DR2L	2-Lamp Driver			
DR3L	3-Lamp Driver			
DR4L	4-Lamp Driver			

"xx" can be 35=3500K, 40=4000K, 50=5000K.

Key Features & Benefits

- External Driver
- All plastic construction
- Non-Dimmable
- Long life: 50,000 hours (L70)
- CRI ≥ 82
- 5 Year limited warranty
- Available in 3500K, 4000K, 5000K
- Suitable for damp locations
- Suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

T8: U-BEND (UL TYPE-A)

LED T8 U-Bend

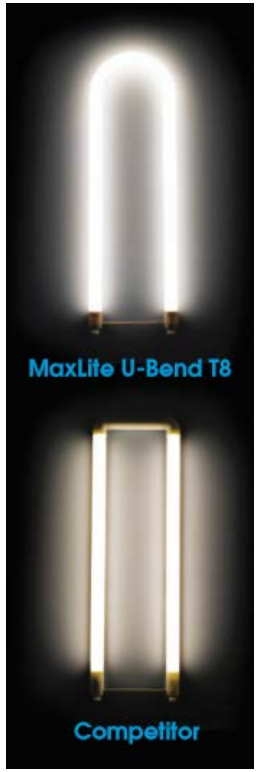

Key Features & Benefits

- Plug & Play (UL Type-A)
- Compatible with most Instant Start and Programmed Rapid Start ballasts
- All plastic construction
- Non-Dimmable
- Long life: 50,000 hours (L70)
- CRI ≥ 80
- 5 Year limited warranty
- Available in 3500K, 4000K, 5000K
- Suitable for damp locations
- Suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

Item #	Description	Wattage	CCT	Lumens
U13T8DF2xx	U-Bend, 2ft	13	3500K, 4000K, 5000K	1800

“xx” can be 35=3500K, 40=4000K, 50=5000K

© 2017 MaxLite®. All Rights Reserved.

T5: LINEAR (UL TYPE-A)

Item #	Description	Wattage	CCT	Lumens
L25T5DF4xx-CG4	4ft	25	4000K, 5000K	3200

"xx" can be 40=4000K, 50=5000K.

Key Features & Benefits

- Plug & Play (UL Type-A)
- Compatible with most electronic T5HO ballasts
- Glass w/PET construction
- Long life: 50,000 hours (L70)
- CRI ≥ 82
- 5 Year limited warranty
- Available in 4000K, 5000K
- Suitable for damp locations
- Suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

SIGNAGE: LINEAR T8 (UL TYPE-B)

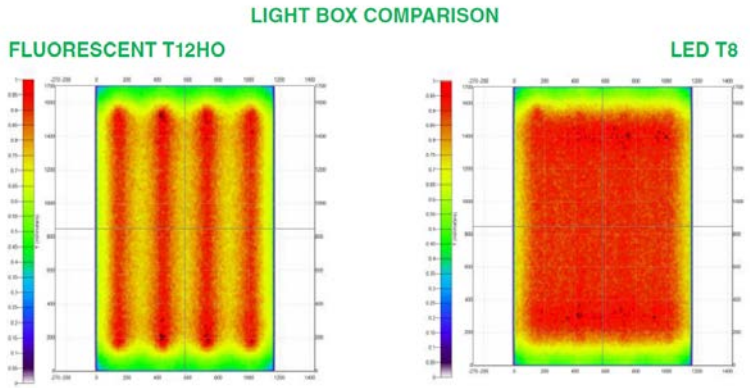

Item #	Length	Wattage	CCT	Lumens
DSL23T8SE465	4ft	23	6500K	3000
DSL30T8SE565	5ft	30	6500K	3900
DSL42T8SE665	6ft	42	6500K	5450
DSL53T8SE865	8ft	53	6500K	6900

ETA: End of June

Key Features & Benefits

- Replacement for T12HO
- 120V-277V (UL Type-B)
- Double-sided LEDs designed for a virtual 360° illumination
- Plastic/Aluminum construction
- Non-Dimmable
- R17d end caps
- CRI ≥ 80
- Long life: 50,000 hours (L70)
- 7 Year limited warranty
- Suitable for damp locations
- Suitable for enclosed fixture
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

CHANNEL LETTER & LIGHT BOX

Item #	Description	Wattage	CCT	Lumens
SM1.8DC4WT65	4-LED module	1.8	6500K	116

Item #	Description	Wattage	CCT	Lumens
SM1.0DC3WT65	3-LED module	1.0	6500K	93

Key Features & Benefits

- Standard 160° batwing distribution
- 3M VHB tape and ruggedized screw bore
- IP68, ultrasonically welded case
- Long life: 50,000 hours (L70)
- 5 Year limited warranty
- Suitable for damp/wet locations
- UV and IR free
- Mercury and lead free
- RoHS compliant
- Instant-on

© 2017 MaxLite®. All Rights Reserved.

SIGNAGE: LED MODULES

2-LED module

3-LED module

4-LED module

Item #	Description	Wattage	CCT	Lumens	Modules/Tray	Mod/Ft
SM0.7DC2WT65	2-LED module	0.7	6500K	47	100	3
SM0.9DC2WT65	2-LED module	0.9	6500K	58	100	3
SM0.7DC3WT65	3-LED module	0.7	6500K	70	50	2
SM1.0DC3WT65	3-LED module	1.0	6500K	93	50	2
SM0.7DC3RD	3-LED module	0.7	Red	n/a	50	2
SM1.8DC4WT65	4-LED module	1.8	6500K	116	50	2
OT60W/12/UNV	12V LED Driver	60				

© 2017 MaxLite®. All Rights Reserved.

THANKS FOR ATTENDING!

QUESTIONS/ANSWERS

Thank you everyone for your attention! Please feel free to use this opportunity to ask any questions you may have about MaxLite or the products shown in this presentation.

FOR MORE INFORMATION ABOUT OTHER MAXLITE PRODUCTS, OR FOR LIGHTING QUESTIONS IN GENERAL; PLEASE CONTACT:

info@maxlite.com
http://www.maxlite.com
1-800-555-5629

© 2017 MaxLite®. All Rights Reserved.