

PRODUCT FOCUS **GU24 SPIRAMAX**
Compact Fluorescent Lamp

Advanced Technology
Fits all
GU24
fixtures bulb



Also available; a complete line of GU24 sockets & PL Lamps
www.maxlite.com

FOR >> Fixtures with the latest ballast & socket technology



MAX9808-1109



MLS13GU*

MLS18GU*

MLS26GU*

- Now with 90°C Max. Ballast Case Temperature
- Fits all fixtures with GU24 base
- Long life - up to 10,000 hours
- Saves up to 75% in energy costs - instant on, flicker-free
- Also available; a full line of GU24 sockets, in various configurations

INSTANT START
ISIB
INSTANT BRIGHT

RoHS
COMPLIANT




*Energy Star Qualified

*All specifications are subject to change without notice

MaxLite™: 1-800-555-5629 Fax: 973-244-7333 info@maxlite.com www.maxlite.com

PRODUCT FOCUS **GU24 SPIRAMAX**

Compact Fluorescent Lamp

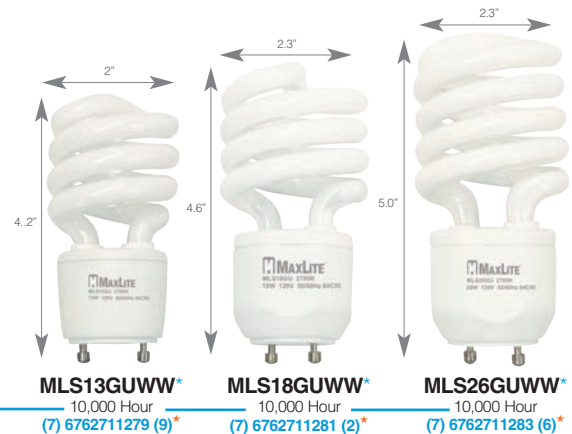

GU24 SPIRAMAX SPECIFICATIONS

Watts	Order Code	Description	Incandescent Equivalent	Lumens	Lamp Life (Hrs)	Type	Pack Type	Case Pack	Dimensions (W" x MOL")	K
*13	11279	MLS13GUWW GU24 Spiral	60	900	10,000	Integral	Box	48	2 x 3.8	2700
*18	11281	MLS18GUWW GU24 Spiral	75	1250	10,000	Integral	Box	48	2.4 x 4.4	2700
*26	11283	MLS26GUWW GU24 Spiral	100	1650	10,000	Integral	Box	48	2.4 x 4.9	2700

SPECIAL NOTES

- >> Now with 90°C Max. Ballast Case Temperature
- >> 2 year warranty

APPLICATIONS

- Ceiling fixtures, pendants
- Outdoor fixtures, recess fixtures
- Wall sconces, vanity bars
- Floor & table lamps

BENEFITS

- Now with 90°C Max. Ballast Case Temperature
- Fits all fixtures with GU24 base
- Small size fits all standard fixtures
- Long life - up to 10,000 hours
- Saves up to 75% in energy costs
- Rapid start electronic ballast with flicker-free operation

SPECIFICATIONS

- Ballast Type >> Electronic
- Starting Method >> Instant Start
- Input Line Voltage >> 120VAC
- Input Line Frequency >> 50/60HZ
- Mini. Starting Temp. >> 0°F
- Max. Ballast Case Temp. >> 90°C
- Color Rendering Index >> 84

MAX9808-1109

All specifications are subject to change without notice



This device complies with Part 18 of the FCC rules. If interference occurs move this product away from the device or plug into a different outlet. This product may cause interference to radio equipment and should not be installed near maritime safety communications equipment or other critical navigation or communication equipment operating between 0.45-30MHz.



FCC Certified

*UPC Codes

*Energy Star Qualified

MaxLite™: 1-800-555-5629 Fax: 973-244-7333 info@maxlite.com www.maxlite.com